

All dimensions are in mm.

Motor – sensor configurations					
Sensor \ Motor	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	⊕		⊕	⊕	
Incr. Encoder + Hall	⊕	⊕			
Analog Sin/Cos encoder	⊕				
Tacho			⊕		
Open-loop (no sensor)				⊕	⊕

Features

- Motor supply: 9-36V. Optional logic supply: 9-36V
- Output current: 4A cont. (BLDC mode); 10A_{PEAK}, up to 100KHz PWM
- Digital Hall sensor interface (single-ended and open collector)
- Incremental encoder interface (differential)
- Analogue sin/cos encoder interface (differential 1V_{pp})
- 5 digital inputs, 5-36V, PNP or NPN software selectable: Enable, 2 for limit switches, 2 general-purpose
- 4 digital outputs, 5-36V, 0.5A, NPN open-collector: Ready, Error, 2 general-purpose
- 1 analogue input: 12-bit, 0-5V: Reference/Feedback or general purpose
- RS-232 serial & CAN-bus 2.0B interfaces with H/W selectable addresses
- TMLCAN and CANopen (CiA 301 v4.2 and CiA 402 v3.0) protocols selectable by jumper
- 2K x 16 SRAM for data acquisition
- 4K x 16 E²ROM to store TML motion programs and data
- Operating ambient temperature: 0-40°C (over 40°C with derating)
- Hardware Protections: short-circuit between motor phases and from motor phases to GND, over-voltage, under-voltage and I²t
- Firmware: F508M+ or F523E+

Mating Connector				
Producer	Part No.	Connector	Description	Wire Gauge
MOLEX	43025-0200	J1	MICROFIT RECEPTACLE HOUSING, 2x1 WAY	AWG 20..24
MOLEX	43025-0400	J5,J6,J7	MICROFIT RECEPTACLE HOUSING, 2x2 WAY	AWG 20..24
MOLEX	43025-1000	J2	MICROFIT RECEPTACLE HOUSING, 2x5 WAY	AWG 20..24
MOLEX	43025-1400	J4	MICROFIT RECEPTACLE HOUSING, 2x7 WAY	AWG 20..24
MOLEX	43030-0007	J1,J2,J4,J5,J6,J7	CRIMP PIN, MICROFIT, 5A	AWG 20..24
MOLEX	51110-1056	J3	MILLIGRID RECEPTACLE HOUSING, 2x5 WAY	AWG 24..30
MOLEX	50394-8400	J3	CRIMP PIN, MILLIGRID	AWG 24..30

Name EP	First edition October 04, 2013	Document template: P099.TQT.564.0001	Last edition November 29, 2022	Visa :
TECHNOSOFT	Title of document	iPOS3604 BX-CAN PRODUCT DATA SHEET	N° document P028.002.E201.DSH.10J	Page: 1 of 4



iPOS3604 BX-CAN DATASHEET

P/N: P028.002.E201



Connector Description

Pin	Name	Type	Description
1	GND	-	Negative return (ground) of the power supply
2	+V _{MOT}	I	Positive terminal of the motor supply: 9 to 36V _{DC} / Positive terminal of the logic supply if J4 pin 7 not connected

Pin	Name	Type	Description
1	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
2	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
3	Hall 1	I	Digital input Hall 1 sensor
4	Hall 2	I	Digital input Hall 2 sensor
5	Hall 3	I	Digital input Hall 3 sensor

Pin	Name	Type	Description
6	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
7	CR/B-	O	Chopping resistor / Phase B- for step motors
8	+5V _{OUT}	O	5V output supply - internally generated
9	GND	-	Negative return (ground) of the motor supply
10	GND	-	Negative return (ground) of the motor supply

Pin	Name	Type	Description
1	GND	-	Return ground for sensors supply
2	+5V _{OUT}	O	5V output supply for I/O usage
3	GND	-	Return ground for sensors supply
4	+5V _{OUT}	O	5V output supply for I/O usage

Pin	Name	Type	Description
5	A-/Sin-	I	Incr. encoder A- diff. input, or analogue encoder Sin-diff. input
6	A+/Sin+	I	Incr. encoder A+ diff. input, or analogue encoder Sin+diff. input
7	B-/Cos-	I	Incr. encoder B- diff. input, or analogue encoder Cos-diff. input
8	B+/Cos+	I	Incr. encoder B+ diff. input, or analogue encoder Cos+diff. input
9	Z-	I	Incr. encoder Z- diff. input
10	Z/Z+	I	Incr. encoder Z+ (index) diff. input

Pin	Name	Type	Description
1	+5V _{OUT}	O	5V output supply for I/O usage
2	Reserved	-	Reserved. Do not connect.
3	IN0	I	5-36V general-purpose digital PNP/NPN input
4	IN4/Enable	I	5-36V digital PNP input. Drive enable input
5	IN3/LSN	I	5-36V digital PNP input. Negative limit switch input
6	OUT2/Error	O	5-36V 0.5A, drive Error output, active low, NPN open-collector/TTL pull-up. Also drives the red LED
7	+V _{LOG}	I	Positive terminal of the logic supply: 9 to 36V _{DC} / If not connected, the logic supply is automatically routed from J1 pin 2 ¹
8	GND	-	Return ground for I/O pins
9	REF/FDBK	I	Analogue input, 12-bit, 0-5V. Used to read an analogue position/speed reference or feedback, or used as general purpose analogue input
10	IN1	I	5-36V general-purpose digital PNP/NPN input
11	IN2/LSP	I	5-36V digital PNP/NPN input. Positive limit switch input
12	OUT0	O	5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up
13	OUT3/Ready	O	5-36V 0.5A, drive Ready output, active low, NPN open-collector/TTL pull-up. Also drives the green LED.
14	OUT1	O	5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up

Pin	Name	Type	Description
-----	------	------	-------------

iPOS3604 BX-CAN DATASHEET

P/N: P028.002.E201

J5, J6	1	+V _{LOG}	O	Positive terminal of the logic supply: 9 to 36V _{DC}
	2	GND	-	Return ground for CAN-Bus
	3	Can-Hi	I/O	CAN-Bus positive line (dominant high)
	4	Can-Lo	I/O	CAN-Bus negative line (dominant low)

Pin	Name	Type	Description
J7	1	232TX	O RS-232 Data Transmission
	2	GND	- Return ground for RS-232 pins
	3	232RX	I RS-232 Data Reception
	4	GND	- Return ground for RS-232 pins

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- Tamb = 0...40°C, VLOG = 24 VDC; VMOT = 36VDC
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude / continuous BLDC, DC, stepper) = 4A

Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature ²		0		+40	°C
Ambient humidity		0		90	%Rh
Altitude / pressure ³		-0.1	0 ± 2.5	2	Km
Ambient Pressure		0 ²	0.75 ± 1	10.0	atm
Storage Conditions		Min.	Typ.	Max.	Units
Ambient temperature		-40		+85	°C
Ambient humidity		0		100	%Rh
Ambient Pressure		0		10.0	atm
Mechanical Mounting		Min.	Typ.	Max.	Units
Airflow				natural convection ⁴ , closed box	
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)	Without mating connectors			80 x 55 x 16.3	mm
				~3.15 x 2.17 x 0.64	inch
With recommended mating connectors.				84 x 63 x 16.3	mm
				~3.3 x 2.5 x 0.64	inch
Weight	Without mating connectors		70		g
Power dissipation	Idle (no load)		1		W
	Operating		3	5	
Efficiency			98		%
Cleaning agents	Dry cleaning is recommended			Only Water- or Alcohol- based	
Protection degree	According to IEC60529, UL508			IP20	-
Logic Supply Input (+V _{LOG})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	9		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	5.9		39	V _{DC}
	Absolute maximum values, continuous	0		39	V _{DC}
	Absolute maximum values, surge (duration ≤ 10ms) [†]	0		+45	V
Supply current	No Load on Digital Outputs	+V _{LOG} = 9V		125	300
		+V _{LOG} = 12V		80	200
		+V _{LOG} = 24V		50	125
		+V _{LOG} = 39V		40	100
Motor Supply Input (+V _{MOT})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	9		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	8.5		40	V _{DC}
	Absolute maximum values, continuous	0		42	V _{DC}
	Absolute maximum values, surge (duration ≤ 10ms) [†]	0		+45	V
Supply current	Idle		1	5	mA
	Operating	-10	±4	+10	A
	Absolute maximum value, short-circuit condition (duration ≤ 10ms) [†]			15	A

¹ If +V_{LOG} (J4 pin 7) is not connected, the digital outputs and inputs will not be operational.

² Operating temperature can be extended up to +65°C with reduced current and power ratings.

³ iPOS360x can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

⁴ It is recommended to mount the iPOS3604 BX-CAN on a metallic support using the provided mounting holes, for better reliability and reduced de-rating due to heat dissipation

Name EP	First edition October 04, 2013	Document template: P099.TQT.564.0001	Last edition November 29, 2022	Visa :
 TECHNOSOFT	Title of document	iPOS3604 BX-CAN PRODUCT DATA SHEET	N° document P028.002.E201.DSH.10J	Page: 2 of 4



iPOS3604 BX-CAN DATASHEET

P/N: P028.002.E201



Motor Outputs (A/A+, B/A-, C/B+, BR/B-)		Min.	Typ.	Max.	Units	
Nominal output current, continuous	for DC brushed, steppers and BLDC motors with Hall-based trapezoidal control			4	A	
	for PMSM motors with FOC sinusoidal control (sinusoidal amplitude value)			4		
	for PMSM motors with FOC sinusoidal control (sinusoidal effective value)			2.82		
Motor output current, peak	maximum 2.5s	-10		+10	A	
Short-circuit protection threshold	measurement range		±13	±15	A	
Short-circuit protection delay		5	10		μs	
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		±0.3	±0.5	V	
Off-state leakage current		±0.5	±1		mA	
Motor inductance (phase-to-phase)	Recommended value, for current ripple max. ±5% of full range; +V _{MOT} = 36 V	F _{PWM}			μH	
		20 kHz	250			
		40 kHz	120			
		60 kHz	100			
		80 kHz	60			
		100 kHz	45			
	Minimum value, limited by short-circuit protection; +V _{MOT} = 36 V	20 kHz	75		μH	
		40 kHz	25			
		60 kHz	20			
		80 kHz	10			
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	100 kHz	5		μs	
		20 kHz	250			
		40 kHz	125			
		60 kHz	100			
		80 kHz	63			
Current measurement	FS = Full Scale accuracy		±4	±8	%FS	
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4/Enable)		Min.	Typ.	Max.	Units	
Mode compliance		PNP				
Default state	Input floating (wiring disconnected)	Logic LOW				
Input voltage	Logic "LOW"	0	1.6		V	
	Logic "HIGH"	1.8	24	39		
	Floating voltage (not connected)	0				
	Absolute maximum, continuous	-10		+39		
	Absolute maximum, surge (duration ≤ 1s) ¹	-20		+40		
	Logic "LOW"; pulled to GND	0	0			
Input current	Logic "HIGH"	2.9	3.4		mA	
Mode compliance		NPN/ TTL / CMOS / LVTTL (3.3V) / Open-collector				
Default state	Input floating (wiring disconnected)	Logic HIGH				
Input voltage	Logic "LOW"	2	5+24		V	
	Logic "HIGH"		3			
	Floating voltage (not connected)	-10		+30		
	Absolute maximum, continuous	-20		+40		
	Absolute maximum, surge (duration ≤ 1s) ¹	2	5+24			
Input current	Logic "LOW"; Pulled to GND	0.6	1		mA	
	Logic "HIGH"; Internal 4.7kΩ pull-up to +3.3	0	0	0		
	Logic "HIGH"; Pulled to +5V		0.15	0.2		
	Logic "HIGH"; Pulled to +24V		2	2.5		
Input frequency		0		150	kHz	
Minimum pulse		3.3			μs	
ESD protection	Human body model	±5			kV	

Digital Outputs (OUT0, OUT1, OUT2/Error, OUT3/ Ready)				Min.	Typ.	Max.	Units
Mode compliance				All outputs (OUT0, OUT1, OUT2/Error, OUT3/Ready)	TTL / CMOS / Open-collector / NPN 24V		
Default state				Not supplied (+V _{LOG} floating or to GND)	High-Z (floating)		
				Immediately after power-up	OUT0, OUT1	Logic "HIGH"	
					OUT2/Error, OUT3/ Ready	Logic "LOW"	
				Normal operation	OUT0, OUT1, OUT2/Error	Logic "HIGH"	
					OUT3/Ready	Logic "LOW"	
Output voltage	Logic "LOW"; output current = 0.5A				0.2	0.8	V
	Logic "HIGH"; output current = 0, no load	OUT2/Error, OUT3/ Ready	2.9	3	3.3		
		OUT0, OUT1	4	4.5	5		
	Logic "HIGH", external load to +V _{LOG}				V _{LOG}		
	Absolute maximum, continuous				-0.5		V _{LOG} +0.5
	Absolute maximum, surge (duration ≤ 1s) ¹				-1		V _{LOG} +1
Output current	Logic "LOW", sink current, continuous					0.5	A
	Logic "LOW", sink current, pulse ≤ 5 sec.					1	A
	Logic "HIGH", source current; external load to GND; V _{OUT} >= 2.0V	OUT2/Error, OUT3/ Ready				2	mA
		OUT0, OUT1				4	mA
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V				0.1	0.2	mA
	Minimum pulse width				2		μs
ESD protection	Human body model	±15					kV
Digital Hall Inputs (Hall1, Hall2, Hall3)				Min.	Typ.	Max.	Units
Mode compliance				TTL / CMOS / Open-collector			
Default state	Input floating (wiring disconnected)				Logic HIGH		
Input voltage	Logic "LOW"				0	0.8	V
	Logic "HIGH"				2	5	
	Floating voltage (not connected)					4.4	
	Absolute maximum, surge (duration ≤ 1s) ¹				-10		+15
Input current	Logic "LOW"; Pull to GND					1.2	mA
	Logic "HIGH"; Internal 4.7kΩ pull-up to +5				0	0	
Minimum pulse width		2					μs
ESD protection	Human body model	±5					kV
Encoder Inputs (A+, A-, B+, B-, Z+, Z-)				Min.	Typ.	Max.	Units
Differential mode compliance				For full RS422 compliance, see ¹			
Input voltage, differential mode				TIA/EIA-422-A			
Input impedance, differential				Hysteresis	±0.06	±0.1	±0.2
				Common-mode range (A+ to GND, etc.)	-7		+7
				A+ to A-, B+ to B-	4.2	4.7	
				Z+ to Z-	6.1	7.2	kΩ
				Single-ended mode, Open-collector / NPN	0		500
				Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	0		MHz
				Single-ended mode, Open-collector / NPN	1		μs
				Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	50		ns
Input voltage, any pin to GND				Absolute maximum values, continuous	-7		+7
Input voltage, any pin to GND				Absolute maximum, surge (duration ≤ 1s) ¹	-11		+14
ESD protection				Human body model	±1		kV






¹ For full RS-422 compliance, 120Ω termination resistors must be connected across the differential pairs, as close as possible to the drive input pins.

Name EP	First edition October 04, 2013	Document template: P099.TQT.564.0001	Last edition November 29, 2022	Visa :
 TECHNOSOFT		Title of document iPOS3604 BX-CAN PRODUCT DATA SHEET		



Sin-Cos Encoder Inputs (Sin+, Sin-, Cos+, Cos-)		Min.	Typ.	Max.	Units
Input voltage, differential	Sin+ to Sin-, Cos+ to Cos-		1	1.25	V _{PP}
Input voltage, any pin to GND	Operational range	-1	2.5	4	V
	Absolute maximum values, continuous	-7		+7	
	Absolute maximum, surge (duration \leq 1s) [†]	-11		+14	
Input impedance	Differential, Sin+ to Sin-, Cos+ to Cos-	4.2	4.7		kΩ
	Common-mode, to GND		2.2		kΩ
Resolution with interpolation	Software selectable, for one sine/cosine period	2		10	bits
Frequency	Sin-Cos interpolation	0		450	kHz
	Quadrature, no interpolation	0		10	MHz
ESD protection	Human body model	± 1			kV
Analog Input (REF/FDBK)		Min.	Typ.	Max.	Units
Input voltage	Operational range	0		4.95	V
	Absolute maximum values, continuous	-12		+18	
	Absolute maximum, surge (duration \leq 1s) [†]			± 36	
Input impedance	To GND	30			kΩ
Resolution		12			bits
Integral linearity				± 2	bits
Offset error		± 2		± 10	bits
Gain error		$\pm 1\%$		$\pm 3\%$	% FS ²
Bandwidth (-3dB)	Software selectable	0		1	kHz
ESD protection	Human body model	± 5			kV
RS-232		Min.	Typ.	Max.	Units
Compliance					TIA/EIA-232-C
Bit rate	Software selectable	9600		115200	Baud
Short-circuit	232TX short to GND				Guaranteed
ESD protection	Human body model	± 2			kV
CAN-Bus		Min.	Typ.	Max.	Units
Compliance					ISO11898, CIA-301v4.2, 402v3.0
Bit rate	Software selectable	125		1000	Kbps
Bus length	1Mbps			25	m
	500Kbps			100	
\leq 250Kbps				250	
Resistor	Between CAN-Hi, CAN-Lo				none on-board
Node addressing	Hardware: by Hex switch				1 + 15 & 255
	Software				1 + 127; 255 (CANopen); 1- 255 (TMLCAN)
ESD protection	Human body model	± 15			kV
Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 250mA	4.8	5	5.2	V
Output current		250	350		mA
Short-circuit					Yes / Drive resets at event
Over-voltage					NOT protected
ESD protection	Human body model	± 1			kV
Conformity		Min.	Typ.	Max.	Units
EU Declaration	2014/30/EU (EMC), 2014/35/EU (LVD), 2011/65/EU (RoHS), 1907/2006/EC (REACH), 93/68/EEC (CE Marking Directive), EC 428/2009 (non dual-use item, output frequency limited to 590Hz)				

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

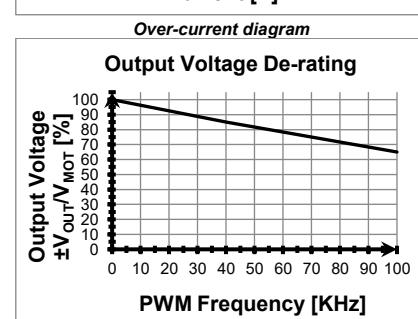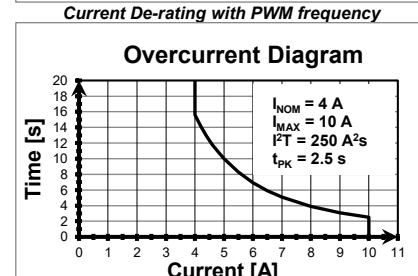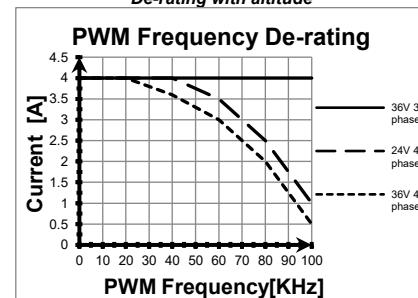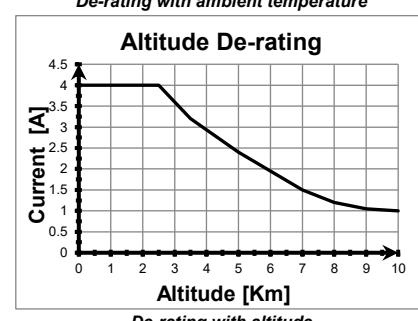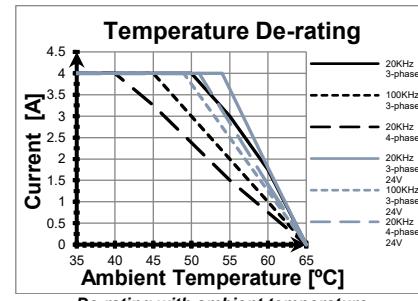

¹ For many applications, an 120Ω termination resistor should be connected across SIN+ to SIN-, and across COS+ to COS-. Please consult the feedback device datasheet for confirmation.

² "FS" stands for "Full Scale"

Name EP	First edition October 04, 2013	Document template: P099.TQT.564.0001	Last edition November 29, 2022	Visa :
 TECHNOSOFT	Title of document iPOS3604 BX-CAN PRODUCT DATA SHEET		N° document P028.002.E201.DSH.10J	Page: 4 of 4