

All dimensions are in mm. Drawing not to scale. Pins facing downward view.

Motor – sensor configurations					
Sensor	Motor				
	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	Ⓣ		Ⓣ	Ⓣ	
Incr. Encoder + Dig. Hall	Ⓣ	Ⓣ			
Digital Halls control only	Ⓣ				
Tacho			Ⓣ		
Open-loop (no sensor)				Ⓣ	Ⓣ

Mating Connectors			
Producer	Part No.	Connector	Description
Samtec	SQW-117-01-F-D(-VS)	J1	2x17, 2.0mm THT (SMD) socket
	CLT-117-02-F-D		2x17, 2.0mm SMD pass-through socket
	SQW-110-01-F-D(-VS)	J2	2x10, 2.0mm THT (SMD) socket
	CLT-110-02-F-D		2x10, 2.0mm SMD pass-through socket

- **Features**
 - Motion controller and drive in a single compact unit based on MotionChip™ technology
 - Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
 - Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
 - Motor supply: 48V nominal
 - Motor output current:
 - Nominal: 4.5A_{RMS} / 6.3A amplitude for PMSM motors
 - 5.5A for DC / BLDC / Step motors
 - Peak: 11.3A_{RMS} / 16A amplitude
 - Logic supply: 24V nominal, 48V max
 - Feedback can be:
 - 1 x Hall sensor interface (digital)
 - Feedback: Incremental A / B (index Z available): differential or single-ended;
 - 3 x digital inputs: 2 for limit switches + one Enable, NPN, pull-up on-board to +5V. Pull to GND to activate.
 - 3 x configurable I/Os, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 0.1A.
 - 3 x digital inputs: 2 for limit switches + one Enable, NPN, pull-up on-board to +5V. Pull to GND to activate.
 - Commissioning (set-up) possible through RS232, USB, FoE (file-over-EtherCAT) or EoE (Ethernet-over-EtherCAT)
 - EtherCAT connection to standard RJ45: requires external magnetics (may be integrated into RJ45)
 - 24Kwords E²ROM to store setup data, TML motion programs, cam tables and other user data
 - 16Kwords SRAM memory for data acquisition
 - Operating ambient temperature: 0-40°C (over 40°C with de-rating)
 - Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t drive & motor, control error
 - 3 AxisID inputs, for hardware-based address setting
 - >98% voltage efficiency, >98% power efficiency

Name ALN	First edition 18 April, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
		Title of document Micro 4804 LZ-CAT PRODUCT DATA SHEET	N° document P020.022.E122.DSH.10F	
				Page: 1 of 5



Micro 4804 LZ-CAT DATASHEET

P/N: P020.022.E122

Pin	Name	Type	Description
1	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC}
2	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
3	GND	-	Ground return for logic supply
4	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
5	GND	-	Ground return for motor supply & shield for motor windings cable
6	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
7	+Vmot	I	Positive terminal of the motor supply: 7 to 48 VDC
8	Cr/B-	O	Chopping resistor / Phase B- for 2-ph steppers
9	BFS	I	Boot Fail-Safe: Connect to GND to reprogram firmware in the improbable case when a power loss occurs during a firmware update and the normal firmware recovery fails
10	ID2	I	AxisID2 selection pin. See AxisID register settings table.
11	TX1-	I/O	Transmit/Receive negative, OUT port. Connect to magnetics PHY TX1 or directly to nearby RX0-
12	RX1-	I/O	Receive/Transmit negative, OUT port. Connect to magnetics PHY RX1 or directly to nearby TX0-
13	TX1+	I/O	Transmit/Receive positive, OUT port. Connect to magnetics PHY TX1 or directly to nearby RX0+
14	RX1+	I/O	Receive/Transmit positive, OUT port. Connect to magnetics PHY RX1 or directly to nearby TX0+
15	GND1*	-	Ground shield & center-tap for ECAT magnetics port 1
16	GND0*	-	Ground shield & center-tap for ECAT magnetics port 0
17	TX0-	I/O	Transmit/Receive negative, IN port. Connect to magnetics PHY TX0 or directly to nearby RX1-
18	RX0-	I/O	Receive/Transmit negative, IN port. Connect to magnetics PHY RX0 or directly to nearby TX1-
19	TX0+	I/O	Transmit/Receive positive, IN port. Connect to magnetics PHY TX0 or directly to nearby RX1+
20	RX0+	I/O	Receive/Transmit positive, IN port. Connect to magnetics PHY RX0 or directly to nearby TX1+
21	ID0	I	AxisID0 selection pin. See AxisID register settings table.
22	ID1	I	AxisID1 selection pin. See AxisID register settings table.
23	232TX	O	RS-232 Data Transmission.
24	232RX	I	RS-232 Data Reception.
25	Rsvd.	-	Reserved. Do not use.
26	Rsvd.	-	Reserved. Do not use.
27	IN2/LSP	I	5-48V digital NPN input. Positive limit switch input
28	IN3/LSN	I	5-48V digital NPN input. Negative limit switch input
29	IN5/Enable	I	5-48V digital NPN input. Drive Enable input
30	I/O0	I/O	5-48V 1.5A NPN (sink) general-purpose digital programmable input IN0 or output OUT0
31	I/O1	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN1 or output OUT1
32	I/O4	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN4 or output OUT4
33	GND	-	Ground return and shield
34	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)




Nominal[V]	Minimum[V]	Maximum[V]	IDx* Bits	IDx* Value
0.000	0.00	0.53	000	0
1.06	0.53	1.41	001	1
1.76	1.41	2.01	010	2
2.25	2.01	2.43	011	3
2.60	2.43	2.75	100	4
2.89	2.75	3.01	101	5
3.13	3.01	3.22	110	6
3.32	3.22	3.30	111	7

- Remarks:**
- AxisID = (64*ID2_Value) + (8*ID1_Value) + ID0_Value
 - If all "IDx" pins are left not connected or connected to GND, the AxisID value is 255 and the EtherCAT register called "configured station alias" will be 0.
 - Bit 8 (MSB of ID2) is ignored, and always considered as "0"

Pin	Name	Type	Description
1	+V USB	I	USB 5V detect input
2	GND	-	Ground return for USB
3	Hall1	I	Digital Hall sensor 1
4	Hall2	I	Digital Hall sensor 2
5	Hall3	I	Digital Hall sensor 3
6	GND	-	Ground return and shield
7	+5V	O	Supply for all feedback sensors
8	GND	-	Ground return and shield
9	EncA+/EncA	I	Encoder A+ diff. input or single-ended input
10	EncA-	I	Encoder A- diff. input. Leave open for single-ended; Add externally 120Ω to pin 9 for differential
11	EncB+/EncB	I	Encoder B diff. input or single-ended input
12	EncB-	I	Encoder B- diff. input. Leave open for single-ended; Add externally 120Ω to pin 11 for differential
13...16	Rsvd.	-	Reserved. Do not use.
17	EncZ+/EncZ	I	Encoder Z+ diff. input or single-ended input
18	EncZ-	I	Encoder Z- diff. input. Leave open for single-ended; Add externally 120Ω to pin 17 for differential
19	USB DM	I/O	USB data-
20	USB DP	I/O	USB data+

Pin	Name	Type	Description
1	ECAT ACT0	O	Shows the state of the physical link and activity for ECAT IN port. Active high, LV-TTL.
2	ECAT ACT1	O	Shows the state of the physical link and activity for ECAT OUT port. Active high, LV-TTL.
3	TML RDY	O	Lit after power-on when the drive initialization ends. Turned off when an error occurs. Active high, LV-TTL.
4	TML ERR	O	Turned on when the drive detects an error condition. Active high, LV-TTL.
5	ECAT RUN	O	EtherCAT® RUN indicator. Active high, LV-TTL.
6	ECAT ERR	O	EtherCAT® ERROR indicator. Active high, LV-TTL.

No.	Name	Color	Description
LED1	TML ERR	RED	Turned on when the drive detects an error condition.
LED2	ECAT ACT1	YELLOW	Shows the state of the physical link and activity for ECAT OUT port.
LED3	TML RDY	GREEN	Lit after power-on when the drive initialization ends. Turned off when an error occurs.
LED4	ECAT ERR	RED	EtherCAT® ERROR indicator.
LED5	ECAT ACT0	YELLOW	Shows the state of the physical link and activity for ECAT IN port.
LED6	ECAT RUN	GREEN	EtherCAT® RUN indicator.

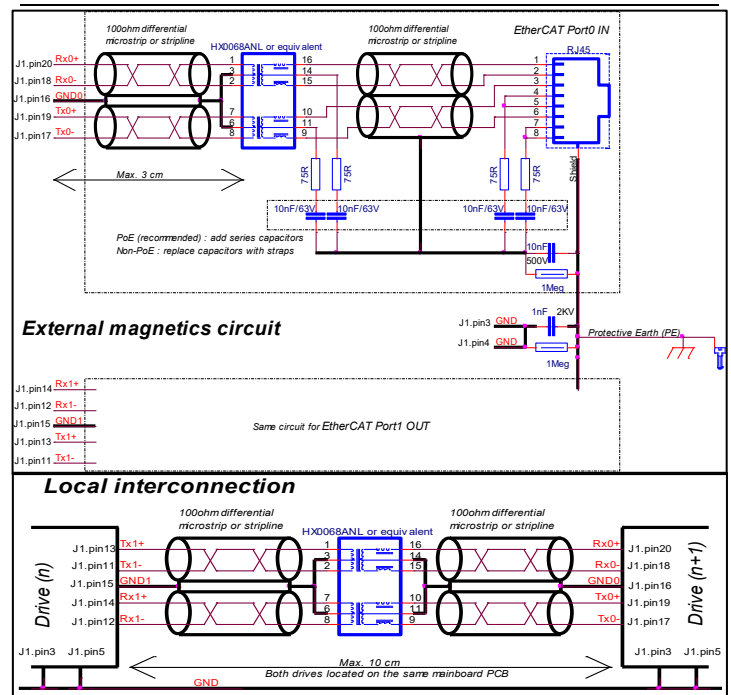

Name ALN	First edition 18 April, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
		Title of document Micro 4804 LZ-CAT	N° document P020.022.E122.DSH.10F	Page: 2 of 5
		PRODUCT DATA SHEET		



Micro 4804 LZ-CAT DATASHEET

P/N: P020.022.E122

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24 \text{ VDC}$; $V_{MOT} = 48 \text{ VDC}$; $F_{PWM} = 20 \text{ kHz}$
- Ambient temperature = 25°C (typical values) / $0^\circ\text{C} \dots 40^\circ\text{C}$ (min/max values)
- Supplies start-up / shutdown sequence: -any-
- Load current = nominal

Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature		0		40 ^{1, 2}	°C
Ambient humidity	Non-condensing	0		90	%Rh
Altitude / pressure ³	Altitude (vs. sea level)	-0.1	0 + 2.5 ³		Km
	Ambient Pressure	0 ²	0.75 + 1	10.0	atm
Storage Conditions		Min.	Typ.	Max.	Units
Ambient temperature		-40		100	°C
Ambient humidity	Non-condensing	0		100	%Rh
Ambient Pressure		0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part			±0.5	kV
	Original packaging			±15	kV
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)	Global size	38.1 x 25 x 9.6			mm
		~1.5 x 1 x 0.4			inch
Weight		8			g
Cleaning agents	Dry cleaning is recommended	Only Water- or Alcohol- based			
Protection degree	According to IEC60529	IP20			-
Power dissipation	Idle ($I_{MOT} = 0\text{A}$)		1	1.2	W
	Full power ($I_{MOT} = \text{nominal}$)		2.0	2.4	
Power efficiency	Full power ($I_{MOT} = \text{nominal}$)		98.7		%
Voltage efficiency	$f_{PWM} = 20\text{kHz}$		98.3		
	$f_{PWM} = 100\text{kHz}$		91.4		
Surface temperature ²	Idle ($I_{MOT} = 0\text{A}$)		55		°C
	Full power ($I_{MOT} = \text{nominal}$)		100		
Mechanical Mounting		Min.	Typ.	Max.	Units
Airflow		natural convection ² , closed box			
Spacing required for horizontal mounting ²	Between adjacent drives		10		mm
	Between drives and nearby walls		10		mm
	Space needed for drive removal		20		mm
	Between drives and roof-top		30		mm
Insertion force	Using recommended mating connectors			40	N
Extraction force		8			N
Logic Supply Input (+V _{LOG})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	6	24	48	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	4.9		60	V _{DC}
	Absolute maximum values, continuous	-0.5		63	V _{DC}
Supply current	+V _{LOG} = 12V		90	150	mA
	+V _{LOG} = 24V		60	90	
	+V _{LOG} = 48V		45	60	
Utilization category	Acc. to 60947-4-1 ($I_{PEAK} \leq 1.05 \cdot I_{NOM}$)	DC-1			
Motor Supply Input (+V _{MOT})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	7		48	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	6		60	V _{DC}
	Absolute maximum values, continuous	-0.5		63	V _{DC}
Supply current	Idle		0.3		mA
	Operating	-16	±7	+16	
Voltage measurement error			±0.15	±0.25	V
Utilization category	Acc. to 60947-4-1 ($I_{PEAK} \leq 4.0 \cdot I_{NOM}$)	DC-3			
Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector (NPN sink)			
Default state	Input floating (Wiring disconnected)	4.5	4.8	5.2	V
Input voltage	Digital		1.5	1.7	
		3	2.5		
			0.5		
	Analogue	0	0.5...4.5	4.95	
Input current	Logic "LOW"; Pull to GND		2.4		mA
	Logic "HIGH"; Internal 2.2kΩ pull-up to +5		0		
Minimum pulse width			66		µs
ESD protection - Human body model			±15		kV

Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 400mA	5.05	5.2	5.25	V
Output current	Output voltage ≥ 4.85V			1.200	mA
Short-circuit to GND protection		Yes / Drive resets at event			
Over-voltage protection		NOT protected			
ESD protection		Human body model		±1	kV
Motor Outputs (A/A+, B/A-, C/B+, CR/B-)		Min.	Typ.	Max.	Units
Nominal current ⁴	PMSM motors sinusoidal amplitude			±6.3	A
	PMSM motors sinusoidal RMS			4.5	A _{RMS}
	DC/BLDC/STEP motors continuous			5.5	A
Peak current	maximum 4 seconds	-16		+16	A
Short-circuit protection threshold			±25	±28	A
Short-circuit protection delay		2.6		3.5	µs
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		50	70	mV
Off-state leakage current			0.3	1	mA
Current measurement	Accuracy (FS = Full Scale)		±1	±1.5	%FS
	Noise (current ≤ 2A)		±4	±6	mA
	Noise (current ≥ 2A)		±30	±50	mA
	Offset drift (compensated @ AxisOn)			±0.16	mA/°C
Motor inductance (phase-to-phase)	Recommended value to avoid spurious short-circuit protection, triggered by ripple	Fast loop ⁵ V _{MOT}			µH
		50µs 48V	133		
		100µs 48V	266		
		50µs 24V	66		
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	F _{PWM} = 20 kHz	330		µs
		F _{PWM} = 40 kHz	170		
		F _{PWM} = 60 kHz	140		
		F _{PWM} = 80 kHz	80		
			66		
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5/ENA)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink)			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"	IN0, IN1, IN4, IN5/ENA	1.4	1.8	V
	Logic "HIGH"		3.1	2.5	
	Hysteresis		0.9	1.1	
	Logic "LOW"		1.4	1.6	
	Logic "HIGH"		4	3.5	
	Hysteresis		0.6		
	Floating voltage (not connected)		4.7		
Input current	Absolute maximum, continuous	IN2/LSP, IN3/LSN, IN5/ENA	-2	+80	mA
	Logic "LOW"; Pulled to GND		6.5	8	
	Logic "HIGH"; Pulled to +24V		0.2	0.4	
Input frequency			0	500	kHz
Minimum pulse			1		µs
ESD protection - Human body model			±2		kV
Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink) 24V			
Load type		Resistive, Inductive			
Default state	Not supplied (+V _{LOG} floating)	High-Z (floating)			
	Immediately after power-up	Logic "HIGH"			
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/0.05A for OUT1, OUT4			0.4	V
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
	Absolute maximum, surge (duration ≤ 1s) [†]	-1		V _{LOG} +1	
Output current	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V	5s max	OUT1, OUT4	0.1	A
		0.5s max	OUT0	2	
		<=1%	OUT1, OUT4	0.15	
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V	OUT0	2.5		
		OUT1, OUT4	0.05		
		OUT0	1.5		
Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	mA	
	V _{LOG} =48V	0.42	0.45		
Minimum pulse width		0.5			µs
ESD protection - Human body model			±25		kV

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings
² In case of forced cooling (conduction or ventilation): a) the ambient temperature requirements may be extended substantially as long as the drive (PCB) temperature is kept below 85°C; b) the spacing requirements can be dropped down to zero; c) the surface temperature will decrease accordingly

³ Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

⁴ For current values >4A_{RMS}, pins J1/2...8 may need to be soldered instead of socketed, for long-term reliability – check socket manufacturer specifications.

⁵ Fast loop period of 50µs is not possible with all feedback device types.

Name	First edition	Document template: P099.TQT.564.0001	Last edition	Visa:
ALN	18 April, 2024		March 12, 2025	
TECHNO SOFT		Title of document	N° document	
		Micro 4804 LZ-CAT	P020.022.E122.DSH.10F	
		PRODUCT DATA SHEET		Page: 3 of 5



Micro 4804 LZ-CAT DATASHEET P/N: P020.022.E122






Encoder Inputs (A+, A-, B+, B-, Z+, Z-) ¹		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave A-, B-, Z- floating	TTL / CMOS / Open-collector (NPN sink)			
Single-ended threshold	A+, B+, Z+	1.3	1.4	1.5	V
Single-ended input current	Input pulled to GND against on-board 2.2 K Ω pull-up to +5V		2.4	2.7	mA
Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Input voltage	Hysteresis	± 0.03	± 0.05	± 0.2	V
	Differential mode	-15		+15	
	Common-mode range (A+ to GND, etc.)	-7		+12	
Input impedance, differential	Common-mode (A+ to GND, etc.) Differential (A+ to A-, etc.)		2.2 4.4		k Ω
Input frequency	Differential mode	0		15	MHz
Minimum pulse width	Differential mode	33			ns
ESD protection	Human body model	± 30			kV
RS-232		Min.	Typ.	Max.	Units
Compliance		TIA/EIA-232-C			
Bit rate	Software selectable	9600		115200	Baud
Output voltage		± 5	± 5.7		V
Short-circuit	232TX to GND	Guaranteed			
Input voltage	Absolute maximum, continuous	-30		+30	V
ESD protection	Human body model	± 15			kV
EtherCAT®		Min.	Typ.	Max.	Units
Compliance		IEEE802.3, IEC61158			
Software protocols compatibility		CoE, FoE, EoE, IEC61800-7-301			
Magnetics	Turns ratio	1:1			
	Inductance	350			μ H
	Common mode rejection	-30			dB
	Center tap	to J1 pins 15, 16			
Transmission line	According to TIA/EIA-568-5-A	5	5e	6	Category
		UTP	FTP	STP	Shield
Auto	swap + / - inside a pair	Yes (MLT3 encoding)			
	swap Rx / Tx pairs	Yes (auto-MDI/MDIX)			
	Swap port0(IN) / port1(OUT)	NO (EtherCAT requirement)			
Configured Station Alias (using AxisID)		0 = 255			-
ESD protection	Human body model	± 5			kV

Analog Input (REF/ FDBK)		Min.	Typ.	Max.	Units
Input voltage	Operational range	0...5, -10...+10			V
	Absolute maximum values, continuous	-22		+26	
	Absolute maximum, surge (duration \leq 1s)			± 38	
Input impedance	To 1.44V		20		k Ω
Bandwidth (-3dB)	Software selectable	0		5.3	kHz
Resolution			12		bits
Integral linearity				± 1	bits
Offset error	Range -10V ... +10V		± 3	± 10	bits
	Range 0 ... +5V		± 10	± 30	
Gain error	Range -10V ... +10V		± 0.3	± 0.5	%
	Range 0 ... +5V		± 0.5	± 0.8	
ESD protection	Human body model	± 1.5			kV
AxisID inputs		Min.	Typ.	Max.	Units
Default state	ID1, ID1, ID2 floating	Configured Station Alias = 0, AxisID=255			
Internal pull-down to GND		95	100	105	k Ω
ESD protection	Human body model	± 250			V
LED outputs		Min.	Typ.	Max.	Units
Polarity	Active high (high=LED lit)				
	Common cathode to GND				
Voltage	$I_{OH} \leq 0.9mA$	2.9	3.3		V
	$I_{OH} \leq 1.5mA$	2.4			V
	$I_{OL} \leq 2.0mA$		0	0.4	V
	Abs. max., continuous	-0.5		3.8	V
Current	Sink (I_{OL}) current larger than source (I_{OH}) current	-2.0		+1.5	mA
Short-circuit protection		NOT protected			
ESD protection	Human body model	± 250			V
BFS input		Min.	Typ.	Max.	Units
Polarity		Active Low (0=fail-safe boot, 1=normal)			
Default state	BFS floating	High			
Voltage	Logic low (active)		0	1.1	V
	Logic high (inactive)	2.0	3.3		V
	Abs. max., continuous	-0.5		3.8	V
Current	Logic low (2.2K Ω pull to +3.3V)		1.5	1.6	mA
	Logic high		0		mA
ESD protection	Human body model	± 250			V

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ Full RS-422 compatibility, as well as noise rejection improvement requires an external 120 Ω resistor connected across each signal pair (A+/A-, B+/B-, Z+/Z-)

Name ALN	First edition 18 April, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
		Title of document Micro 4804 LZ-CAT PRODUCT DATA SHEET	N° document P020.022.E122.DSH.10F	Page: 4 of 5

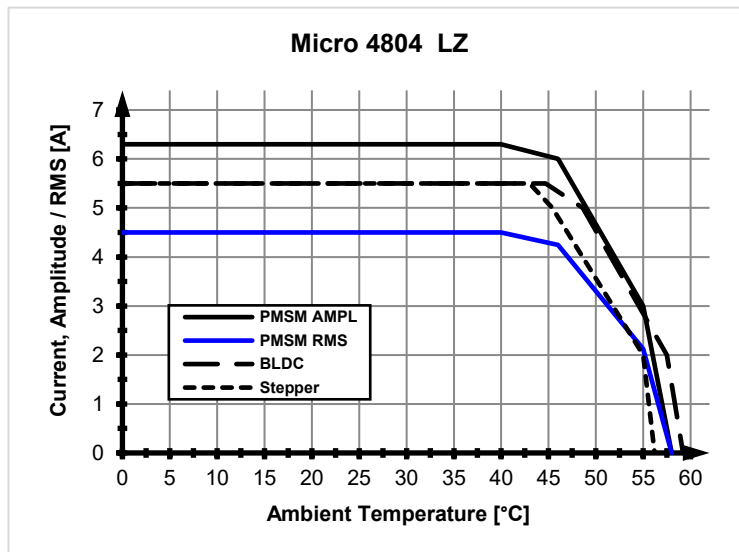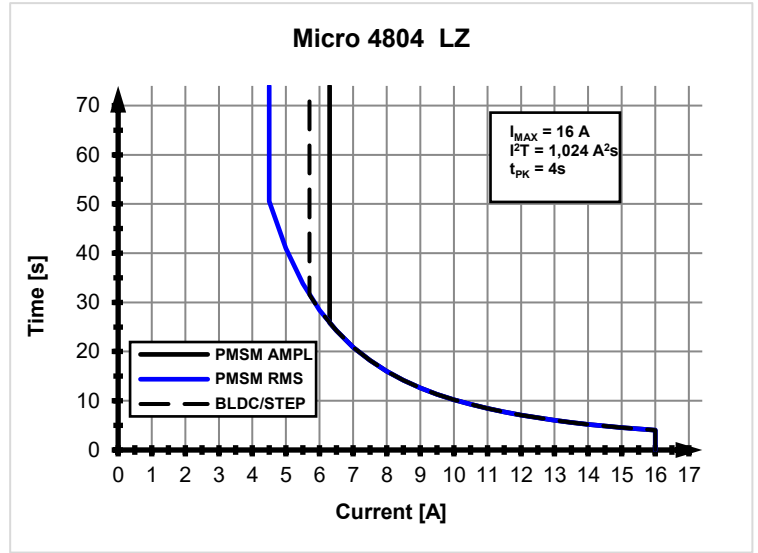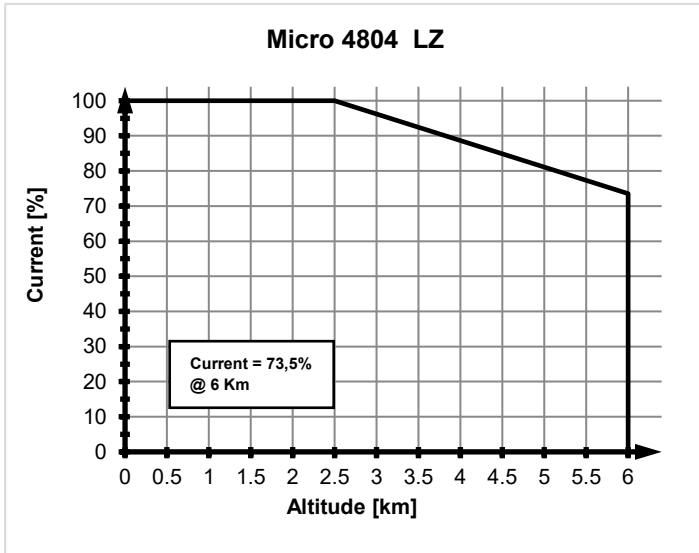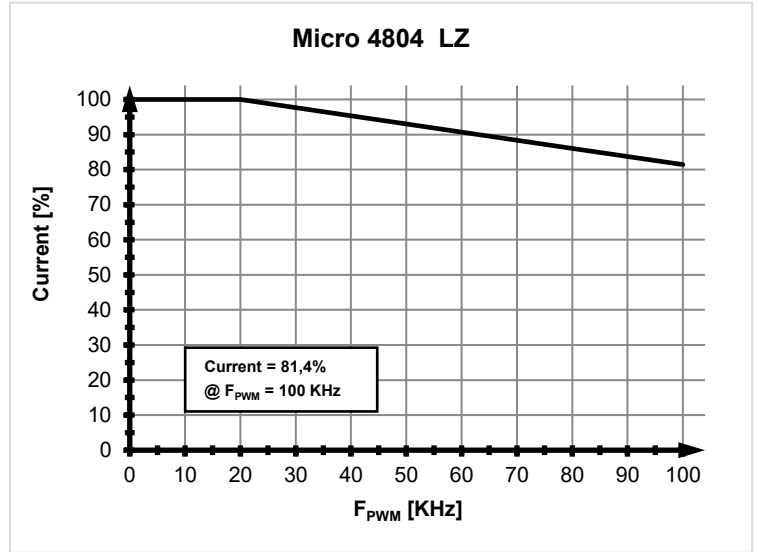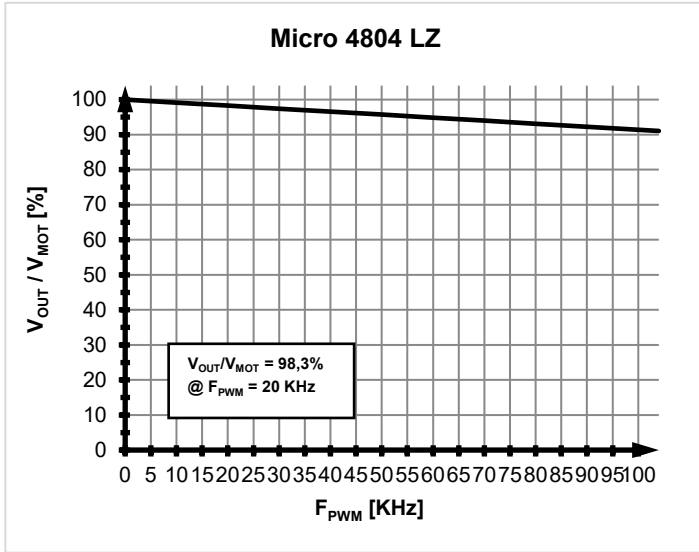

Name ALN	First edition 18 April, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
TECHNOSOFT		Title of document Micro 4804 LZ-CAT PRODUCT DATA SHEET	N° document P020.022.E122.DSH.10F	
			Page: 5 of 5	