


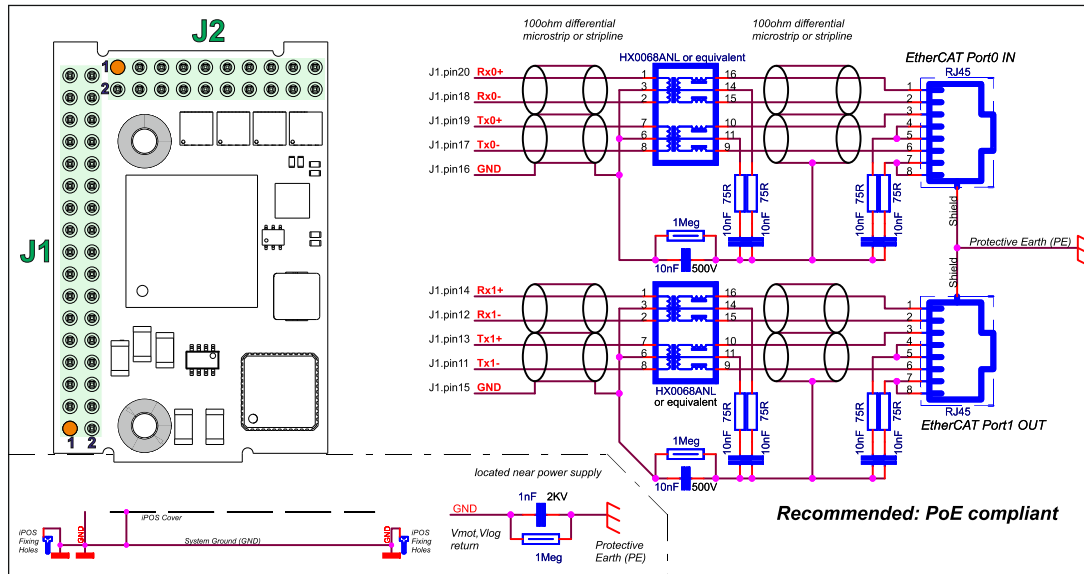
All dimensions are in mm. Drawing not to scale. Pins facing downward view.

Motor – sensor configurations				
Motor		PMSM	BLDC	DC BRUSH
Sensor				
Incr. Encoder		Ⓢ		Ⓢ
Incr. Encoder + Dig. Hall		Ⓢ	Ⓢ	
Linear Halls		Ⓢ		
Digital Halls control only		Ⓢ		
SSI / BiSS-C / EnDAT / Tamagawa / Panasonic / Nikon / Sanyo Denki		Ⓢ	Ⓢ	Ⓢ
Tacho				Ⓢ

Mating Connectors			
Producer	Part No.	Connector	Description
Samtec	SQW-117-01-F-D(-VS)	J1	2x17, 2.0mm THT (SMD) socket
	CLT-117-02-F-D		2x17, 2.0mm SMD pass-through socket
	SQW-111-01-F-D(-VS)	J2	2x10, 2.0mm THT (SMD) socket
	CLT-111-02-F-D		2x10, 2.0mm SMD pass-through socket

Features
<ul style="list-style-type: none"> Motion controller and drive in a single compact unit based on MotionChip™ technology Universal solution for control of rotary and linear brushless and brushed motors Advanced motion control capabilities (CSP, PVT, S-curve, electronic gearing and cam)
<ul style="list-style-type: none"> Motor supply: 48V nominal Motor output current: <ul style="list-style-type: none"> Nominal: 3A_{RMS} / 4.2A amplitude Peak: 10A_{RMS} / 14A amplitude
<ul style="list-style-type: none"> Logic supply: 24V nominal, 48V max Feedback Options: <ul style="list-style-type: none"> 1 x Hall sensor interface (digital or linear) Feedback#1 and Feedback#2 can be: <ul style="list-style-type: none"> Incremental A / B (index Z available only for Encoder 1): differential or single-ended; Absolute: differential or single-ended. Supported protocols: SSI, BiSS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
<ul style="list-style-type: none"> 1 x analogue input software selectable: 12-bit 0-5V or ±10V: Reference, Feedback or general purpose 3 x digital inputs: 2 for limit switches + one Enable, NPN, pull-to-GND to activate, pull-up on-board to +5V. Pull to GND to activate 3 x configurable I/Os, each software selectable as: <ul style="list-style-type: none"> Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate; Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 0.1A.
<ul style="list-style-type: none"> Commissioning (set-up) possible through RS232, USB, FoE (file-over-EtherCAT) or EoE (Ethernet-over-EtherCAT) EtherCAT connection to standard RJ45: requires external magnetics (may be integrated into RJ45) 24k x 16 E²ROM to store setup data, TML motion programs, cam tables and other user data 16k x 16 SRAM memory for data acquisition Operating ambient temperature: 0-40°C (over 40°C with de-rating) Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t, control error >99% voltage efficiency

Name ALN	First edition February 10, 2021	Document template: P099.TQT.564.0001	Last edition November 2, 2023	Visa: AS
		Title of document Micro 4803 MZ-CAT PRODUCT DATA SHEET	N° document P020.001.E122.10R.DSH	Page: 1 of 5




Pin	Name	Type	Description
1	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 VDC
2	A	O	Phase A for 3-ph motors, Motor+ for DC brush motors
3	GND	-	Ground return for logic supply
4	B	O	Phase B for 3-ph motors, Motor- for DC brush motors
5	GND	-	Shield for motor windings cable
6	C	O	Phase C for 3-ph motors
7	+Vmot	I	Positive terminal of the motor supply: 7 to 48 VDC
8	Rsvd.	-	Reserved.
9	BFS	-	Connect to GND to perform a firmware update after a critical firmware failure
10	ID2	I	AxisID ² selection pin. See AxisID register settings table
11	TX1-	I/O	Transmit/Receive negative, OUT port. Connect to magnetics PHY TX1 or directly to nearby RX0-
12	RX1-	I/O	Receive/Transmit negative, OUT port. Connect to magnetics PHY RX1 or directly to nearby TX0-
13	TX1+	I/O	Transmit/Receive positive, OUT port. Connect to magnetics PHY TX1 or directly to nearby RX0+
14	RX1+	I/O	Receive/Transmit positive, OUT port. Connect to magnetics PHY RX1 or directly to nearby TX0+
15	GND	-	Ground shield for port 1
16	GND	-	Ground shield for port 0
17	TX0-	I/O	Transmit/Receive negative, IN port. Connect to magnetics PHY TX0 or directly to nearby RX1-
18	RX0-	I/O	Receive/Transmit negative, IN port. Connect to magnetics PHY RX0 or directly to nearby TX1-
19	TX0+	I/O	Transmit/Receive positive, IN port. Connect to magnetics PHY TX0 or directly to nearby RX1+
20	RX0+	I/O	Receive/Transmit positive, IN port. Connect to magnetics PHY RX0 or directly to nearby TX1+
21	ID0	I	AxisID ⁰ selection pin. See AxisID register settings table
22	ID1	I	AxisID ¹ selection pin. See AxisID register settings table
23	232TX	O	RS-232 Data Transmission.
24	232RX	I	RS-232 Data Reception.
25	CAN Hi	-	CAN-Bus positive line (dominant high) Not functional
26	CAN Lo	-	CAN-Bus negative line (dominant low) while in ECAT
27	IN2/LSP	I	5-60V digital NPN input. Positive limit switch input
28	IN3/LSN	I	5-60V digital NPN input. Negative limit switch input
29	IN5/Enable	I	5-60V digital NPN input. Drive Enable input
30	I/O0	I/O	5-50V NPN general-purpose digital programmable input IN0 /or NPN 1.5A output OUT0
31	I/O1	I/O	5-50V NPN general-purpose digital programmable input IN1 / or NPN 0.1A output OUT1
32	I/O4	I/O	5-50V NPN general-purpose digital programmable input IN4 / or NPN 0.1A output OUT4
33	GND	-	Ground return and shield
34	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)

Pin	Name	Type	Description
1	+V USB	I	5V input from USB
2	GND	-	Ground return for USB
3	Hall1	I	Digital Hall, or Linear Hall sensor 1
4	Hall2	I	Digital Hall, or Linear Hall sensor 2
5	Hall3	I	Digital Hall, or Linear Hall sensor 3
6	GND	-	Ground return and shield
7	+5V	O	Supply for all feedback sensors
8	GND	-	Ground return and shield
9	EncA1+/EncA1/ Dt1+/Dt1	I	Encoder 1 A+/Data+ diff. input or single-ended input
10	EncA1-/Dt1-	I	Encoder 1 A-/Data- diff. input. Leave open for single-ended; Add externally 120Ω to pin 9 for differential
11	EncB1+/EncB1/ Clk1+/Clk1	I	Encoder 1 B+/Clock+ diff. input or single-ended input
12	EncB1-/Clk1-	I	Encoder 1 B-/Clock- diff. input. Leave open for single-ended; Add externally 120Ω to pin 11 for differential
13	EncA2+/EncA2/ Dt2+/Dt2	I	Encoder 2 A+/Data+ diff. input or single-ended input
14	EncA2-/Dt2-	I	Encoder 2 A-/Data- diff. input. Leave open for single-ended; Add externally 120Ω to pin 13 for differential
15	EncB2+/EncB2/ Clk2+/Clk2	I/O	Encoder 2 B+/Clock+ diff. input or single-ended input
16	EncB2-/Clk2-	I	Encoder 2 B-/Clock- diff. input. Leave open for single-ended; Add externally 120Ω to pin 15 for differential
17	Z1+	I	Encoder 1 Z+ diff. input or single-ended input
18	Z1-	I	Encoder 1 Z- diff. input. Leave open for single-ended; Add externally 120Ω to pin 17 for differential
19	USB DM	I/O	USB data-
20	USB DP	I/O	USB data+

No.	Name	Color	Description
LED1	ECAT ERR	RED	EtherCAT® ERROR indicator.
LED2	TML ERR	RED	Turned on when the drive detects an error condition.
LED3	TML RDY	GREEN	Lit after power-on when the drive initialization ends. Turned off when an error occurs.
LED4	ECAT RUN	GREEN	EtherCAT® RUN indicator.
LED5	ECAT ACT0	YELLOW	Shows the state of the physical link and activity for ECAT IN and OUT ports.
LED6	ECAT ACT1	YELLOW	

Name ALN	First edition February 10, 2021	Document template: P099.TQT.564.0001	Last edition November 2, 2023	Visa: AS
TECHNOSOFT		Title of document Micro 4803 MZ-CAT	N° document P020.001.E122.10R.DSH	
		PRODUCT DATA SHEET		Page: 2 of 5

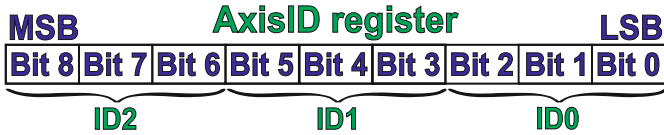

Nominal[V]	Minimum[V]	Maximum[V]	IDx* Bits	IDx* Value
0.000	0.00	0.53	000	0
1.057	0.53	1.41	001	1
1.756	1.41	2.01	010	2
2.254	2.01	2.43	011	3
2.600	2.43	2.75	100	4
2.894	2.75	3.01	101	5
3.128	3.01	3.22	110	6
3.319	3.22	3.35	111	7

Remarks:

1. $AxisID = (64 * ID2_Value) + (8 * ID1_Value) + ID0_Value$
2. If the AxisID pins are not connected, the AxisID value can't be determined.
3. If all "IDx" pins are connected to GND the AxisID value is 255 and the EtherCAT register called "configured station alias" will be 0
4. Bit 8 (MSB of ID2) is ignored, and always considered as "0"

* where "x" can be 1, 2 or 3

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24$ VDC; $V_{MOT} = 48$ VDC; $F_{PWM} = 20$ kHz
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude) = 4.2A

Operating Conditions		Min.	Typ.	Max.	Units	
Ambient temperature		0		40 ¹	°C	
Ambient humidity		Non-condensing		90	%Rh	
Altitude / pressure ²		-0.1	0 + 2.5	2	Km	
Altitude / pressure ²		0 ²	0.75 + 1	10.0	atm	
Storage Conditions		Min.	Typ.	Max.	Units	
Ambient temperature		-40		100	°C	
Ambient humidity		Non-condensing		100	%Rh	
Ambient Pressure		0		10.0	atm	
ESD capability (Human body model)		Not powered; applies to any accessible part		±0.5	kV	
ESD capability (Human body model)		Original packaging		±15	kV	
Mechanical Mounting		Min.	Typ.	Max.	Units	
Airflow		natural convection ³ , closed box				
Spacing required for horizontal mounting		Between adjacent drives		10	mm	
Spacing required for horizontal mounting		Between drives and nearby walls		10	mm	
Spacing required for horizontal mounting		Space needed for drive removal		20	mm	
Spacing required for horizontal mounting		Between drives and roof-top		30	mm	
Insertion force		Using recommended mating connectors		20	N	
Extraction force		Using recommended mating connectors		8	N	
Environmental Characteristics		Min.	Typ.	Max.	Units	
Size (Length x Width x Height)		Global size		38.35 x 25 x 9.71	mm	
Size (Length x Width x Height)		Global size		~1.51 x 0.98 x 0.38	inch	
Weight				8	g	
Cleaning agents		Dry cleaning is recommended		Only Water- or Alcohol- based		
Protection degree		According to IEC60529		IP20	-	
Logic Supply Input (+V _{Loe})		Min	Typ.	Max.	Units	
Nominal values		6	24	48	V _{DC}	
Supply voltage		Absolute maximum values, drive operating but outside guaranteed parameters		4.9	60	V _{DC}
Supply voltage		Absolute maximum values, continuous		-0.5	63	V _{DC}
Supply current		+V _{Loe} = 12V		90	150	mA
Supply current		+V _{Loe} = 24V		60	90	
Supply current		+V _{Loe} = 48V		45	60	
Voltage Measurement		Total error			1.5	%
Utilization category		Acc. to 60947-4-1 (I _{PEAK} ≤ 1.05 * I _{NOM})				DC-1

Motor Supply Input (+V _{MOT})		Min.	Typ.	Max.	Units				
Supply voltage		Nominal values		7		48	V _{DC}		
Supply voltage		Absolute maximum values, drive operating but outside guaranteed parameters		6		60	V _{DC}		
Supply voltage		Absolute maximum values, continuous		-0.5		63	V _{DC}		
Supply current		Idle			25		mA		
Supply current		Operating		-15	±3	+15	A		
Supply current		Absolute maximum value, short-circuit condition (Duration ≤ 10ms) †				16.5	A		
Voltage Measurement		Total error				1.5	%		
Utilization category		Acc. to 60947-4-1 (I _{PEAK} ≤ 4.0 * I _{NOM})					DC-3		
Motor Outputs (A/A+, B/A-, C)		Min.	Typ.	Max.	Units				
Nominal current		PMSM motors sinusoidal amplitude				4.2	A		
Nominal current		PMSM motors sinusoidal RMS				3	A _{RMS}		
Nominal current		DC/BLDC motors continuous ⁴				3.65	A		
Peak current		maximum 2.5s		-14		+14	A		
Short-circuit protection threshold				±16.5		±18	A		
Short-circuit protection delay				2		4	µs		
On-state voltage drop		Nominal output current; including typical mating connector contact resistance			0.1		V		
Off-state leakage current					0.3	1	mA		
Voltage Efficiency					92		%		
Motor inductance (phase-to-phase)		Recommended value, for current ripple max. ±5% of full range; +V _{MOT} = 48 V		F _{PWM}			µH		
Motor inductance (phase-to-phase)				20 kHz		900			
Motor inductance (phase-to-phase)				40 kHz		480			
Motor inductance (phase-to-phase)				60 kHz		320			
Motor inductance (phase-to-phase)				80 kHz		240			
Motor inductance (phase-to-phase)		Minimum value, limited by short-circuit protection; +V _{MOT} = 48 V		100 kHz		200			
Motor inductance (phase-to-phase)				20 kHz		270	µH		
Motor inductance (phase-to-phase)				60 kHz		150			
Motor inductance (phase-to-phase)				40 kHz		100			
Motor inductance (phase-to-phase)				80 kHz		80			
Motor electrical time-constant (L/R)		Recommended value for ±5% current measurement error		100 kHz		60	µs		
Motor electrical time-constant (L/R)				20 kHz		330			
Motor electrical time-constant (L/R)				40 kHz		170			
Motor electrical time-constant (L/R)				60 kHz		140			
Current measurement		FS = Full Scale accuracy			±2	±3	%FS		
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5/ENA)		Min.	Typ.	Max.	Units				
Mode compliance						NPN			
Default state		Input floating (wiring disconnected)		Logic HIGH					
Input voltage		Logic "LOW"		IN0, IN1, IN4, IN5/ENA		3.1	1.4	1.8	V
Input voltage		Logic "HIGH"				0.9	1.1	1.4	
Input voltage		Hysteresis					1.4	1.6	
Input voltage		Logic "LOW"		IN2/LSP, IN3/LSN		4	3.5		
Input voltage		Hysteresis					0.6		
Input current		Floating voltage (not connected)					4.5		
Input current		Absolute maximum, continuous				-5		+55	
Input current		Logic "LOW"; Pulled to GND					9	10	mA
Input current		Logic "HIGH"; Pulled to +24V						0.4	
Input frequency						0		500	kHz
Minimum pulse						1			µs
ESD protection		Human body model				±2			kV
Supply Output (+5V)		Min.	Typ.	Max.	Units				
Output voltage		Current sourced = 400mA		5.05	5.2	5.25	V		
Output current ⁵		24V motor		650	800		mA		
Short-circuit to GND protection				Yes / Drive resets at event					
Over-voltage protection				NOT protected					
ESD protection		Human body model		±1			KV		

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings
² Micro 4803 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ In case of forced cooling (conduction or ventilation) the spacing requirements may drop substantially down to zero as long as the ambient temperature is kept below the maximum operating limit

⁴ For current values >3A_{RMS} pins needs to be soldered instead of socketed

⁵ For more details see the "Current de-rating with +5V output current" graph

Name	First edition	Document template: P099.TQT.564.0001	Last edition	Visa:
ALN	February 10, 2021		November 2, 2023	AS
		Title of document	N° document	
		<p align="center">Micro 4803 MZ-CAT</p> <p align="center">PRODUCT DATA SHEET</p>	<p align="center">P020.001.E122.10R.DSH</p>	<p align="right">Page: 3 of 5</p>

Micro 4803 MZ-CAT

DATASHEET

P/N: P020.001.E122

Digital Outputs (OUT0, OUT1, OUT4)				Min.	Typ.	Max.	Units
Mode compliance	All outputs (OUT0, OUT1, OUT4)			NPN 24V			
Default state	Not supplied (+V _{LOG} floating)			High-Z (floating)			
	Immediately after power-up			Logic "HIGH"			
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for the other digital outputs					0.4	V
	Logic "HIGH"; output current = 0, no load			4	4.5	5	
	Logic "HIGH", external load to +V _{LOG}				V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)			-0.5		V _{LOG} +0.5	
Output current	Logic "LOW", sink current, short duration, duty cycle <=1%	5s max	OUT1, OUT4			0.1	A
			OUT0			2	
	0.5s max	OUT1, OUT4			0.15		A
		OUT0			2.5		
	Logic "HIGH", source current; external load to GND; V _{OUT} >= 2.0V					5	mA
Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V				0.05	0.1	mA	
Minimum pulse width				0.5			µs
ESD protection	Human body model			±15			kV
Hall Inputs (Hall1, Hall2, Hall3)				Min.	Typ.	Max.	Units
Mode compliance				TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V			
Default state	Input floating (Wiring disconnected)			4.5	4.7	5	V
Input voltage	Digital	Logic "LOW"		1.5	1.7		
		Logic "HIGH"	3	2.5			
	Hysteresis		0.5				
Analog		0	0.5...4.5	4.95			
Input current	Logic "LOW"; Pull to GND				2.3		mA
	Logic "HIGH"; Internal 2.2KΩ pull-up to +5				0		
Minimum pulse width					70		µs
ESD protection	Human body model				±15		kV
Encoder Inputs (A+, A-, B+, B-, Z+, Z-, A2+, A2-, B2+, B2-) ¹				Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave A1-, B1-, Z1-, A2-, B2-floating			TTL/CMOS/Open-collector (NPN)			
Single-ended threshold	A1+, B1+, Z1+, A2+, B2+			1.2	1.3	1.5	V
Single-ended input current	Input pulled to GND against on-board 2.2 KΩ pull-up to +5V				2.2	2.5	mA
Differential mode compliance	For full RS422 compliance, see ²			TIA/EIA-422-A			
Input voltage	Hysteresis			±0.03	±0.05	±0.2	V
	Differential mode			-15		+15	
	Common-mode range (A+ to GND, etc.)			-7		+12	
Input impedance, differential	A+, A2+, B+, B2+, Z+, Z2+				2.2		kΩ
	A-, A2-, B-, B2-, Z-, Z2-				4.4		
Input frequency	Differential mode			0		15	MHz
Minimum pulse width	Differential mode			33			ns
ESD protection	Human body model			±30			kV







Absolute encoder interface: SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki				Min.	Typ.	Max.	Units
Differential mode (CLOCK, DATA)	For full RS422 compliance, see ¹			TIA/EIA-422-A			
CLOCK (DATA) Output voltage	Differential; 50Ω differential load			1.5	3.3		V
	Common-mode, referenced to GND			1	1.7	3	
CLOCK frequency	Software selectable			1000, 2000, 3000, 4000			kHz
CLOCK (DATA) Short-circuit protection	Common-mode voltage ±15V			Yes, protected			
DATA format	Software selectable			Binary / Gray			
				Single-turn / Multi-turn			
				Counting direction			
DATA resolution	Single-turn					56	Bits
	Multi-turn and single-turn					56	
If total resolution >31 bits, some bits must be ignored by software setting to achieve a max 31 bits resolution							
Analog Inputs (REF, FDBK)							
0...5V Mode				Min.	Typ.	Max.	Units
Input voltage	Operational range			0		4.95	V
	Absolute maximum values, continuous			-12		+18	
	Absolute maximum, surge (duration ≤ 1s)					±36	
Input impedance	To 1.447V				20		kΩ
Resolution					12		bits
Integral linearity						±2	bits
Offset error					±2	±10	bits
Gain error					±1%	±3%	% FS ²
Bandwidth (-3dB)	Software selectable			0		1.5	kHz
ESD protection	Human body model			±2			kV
±10V Mode				Min.	Typ.	Max.	Units
Differential voltage range					±10		V
Common-mode voltage range	Referenced to GND			-12	0...10	+50	V
Input impedance	To 1.447V				20		kΩ
Resolution					12		bits
Integral linearity						0.036	%FS ²
Offset error	Common-mode voltage = 0...10 V				±0.2	±0.5	%FS ²
Gain error	Common-mode voltage = 0...10 V				±0.5	±3	%FS ²
Bandwidth (-3dB)	Software selectable			0		5.5	kHz
RS-232				Min.	Typ.	Max.	Units
Compliance				TIA/EIA-232-C			
Bit rate	Software selectable			9600		115200	Baud
Short-circuit	232TX short to GND			Guaranteed			
ESD protection	Human body model			±2			kV
EtherCAT®				Min.	Typ.	Max.	Units
Compliance				IEEE802.3, IEC61158			
Transmission line specification	According to TIA/EIA-568-5-A			Cat. 5e.UTP			
J1 pinout	EtherCAT® supports MDI/MDI-X auto-crossover			TIA/EIA-568-A or TIA/EIA-568-B			
Software protocols compatibility				CoE, CiA402, IEC61800-7-301			
Node addressing	By software			1 ÷ 255			-
	By Hardware						-
MAC addressing				none			-
ESD protection	Human body model			±15			kV


[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ Full RS-422 compatibility, as well as noise rejection improvement requires an external 120Ω resistor connected across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-)

² "FS" stands for "Full Scale"

Name ALN	First edition February 10, 2021	Document template: P099.TQT.564.0001	Last edition November 2, 2023	Visa: AS
 TECHNOSOFT		Title of document Micro 4803 MZ-CAT PRODUCT DATA SHEET	N° document P020.001.E122.10R.DSH	
			Page: 4 of 5	

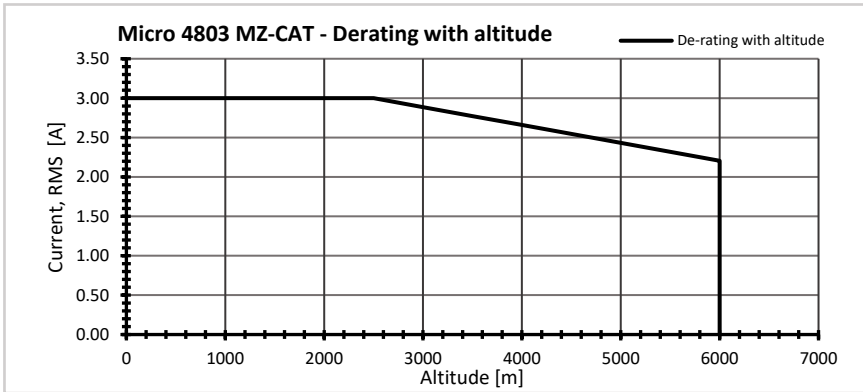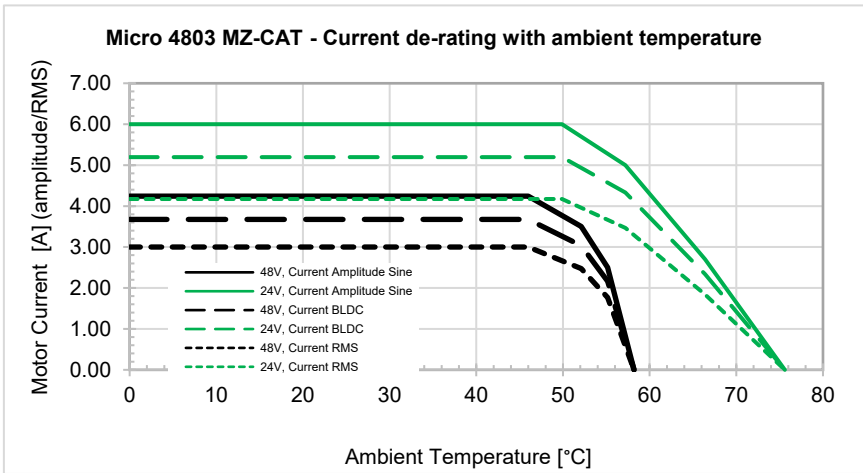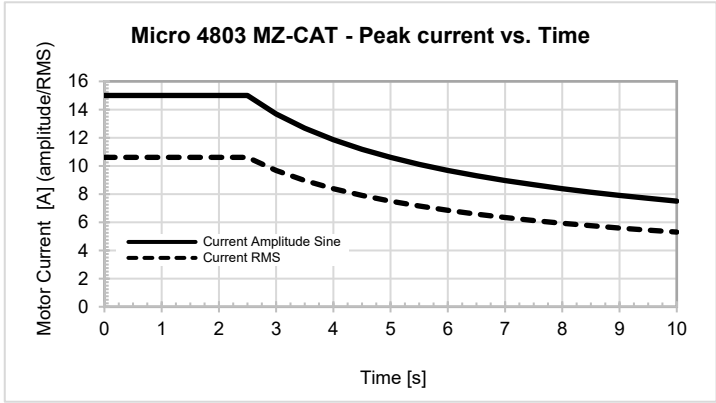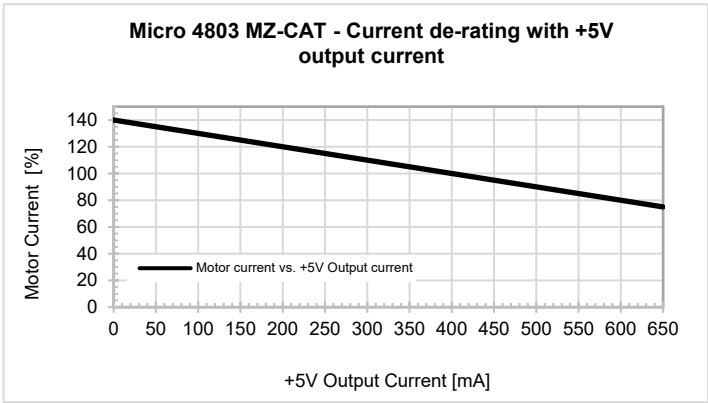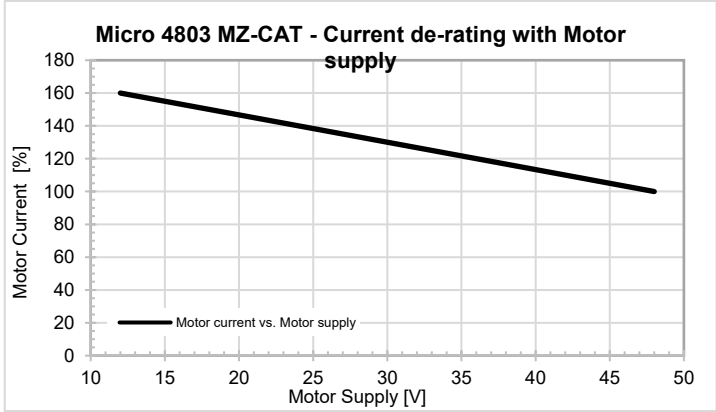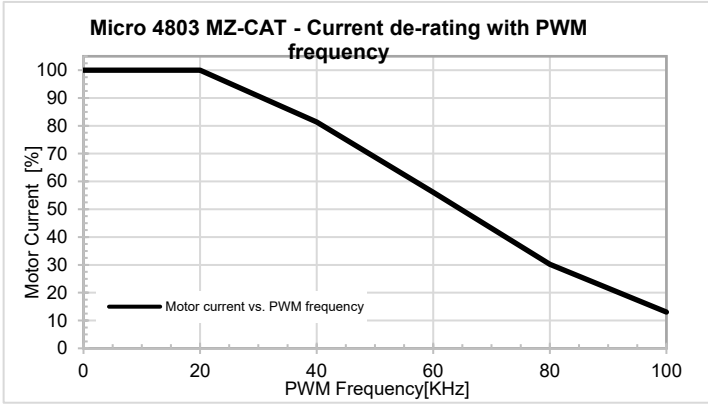

Name ALN	First edition February 10, 2021	Document template: P099.TQT.564.0001	Last edition November 2, 2023	Visa: AS
 TECHNOSOFT		Title of document Micro 4803 MZ-CAT PRODUCT DATA SHEET	N° document P020.001.E122.10R.DSH	
			Page: 5 of 5	