




Micro 4804 SY4-CAT Multi Axis System DATASHEET P/N: P020.202.E404

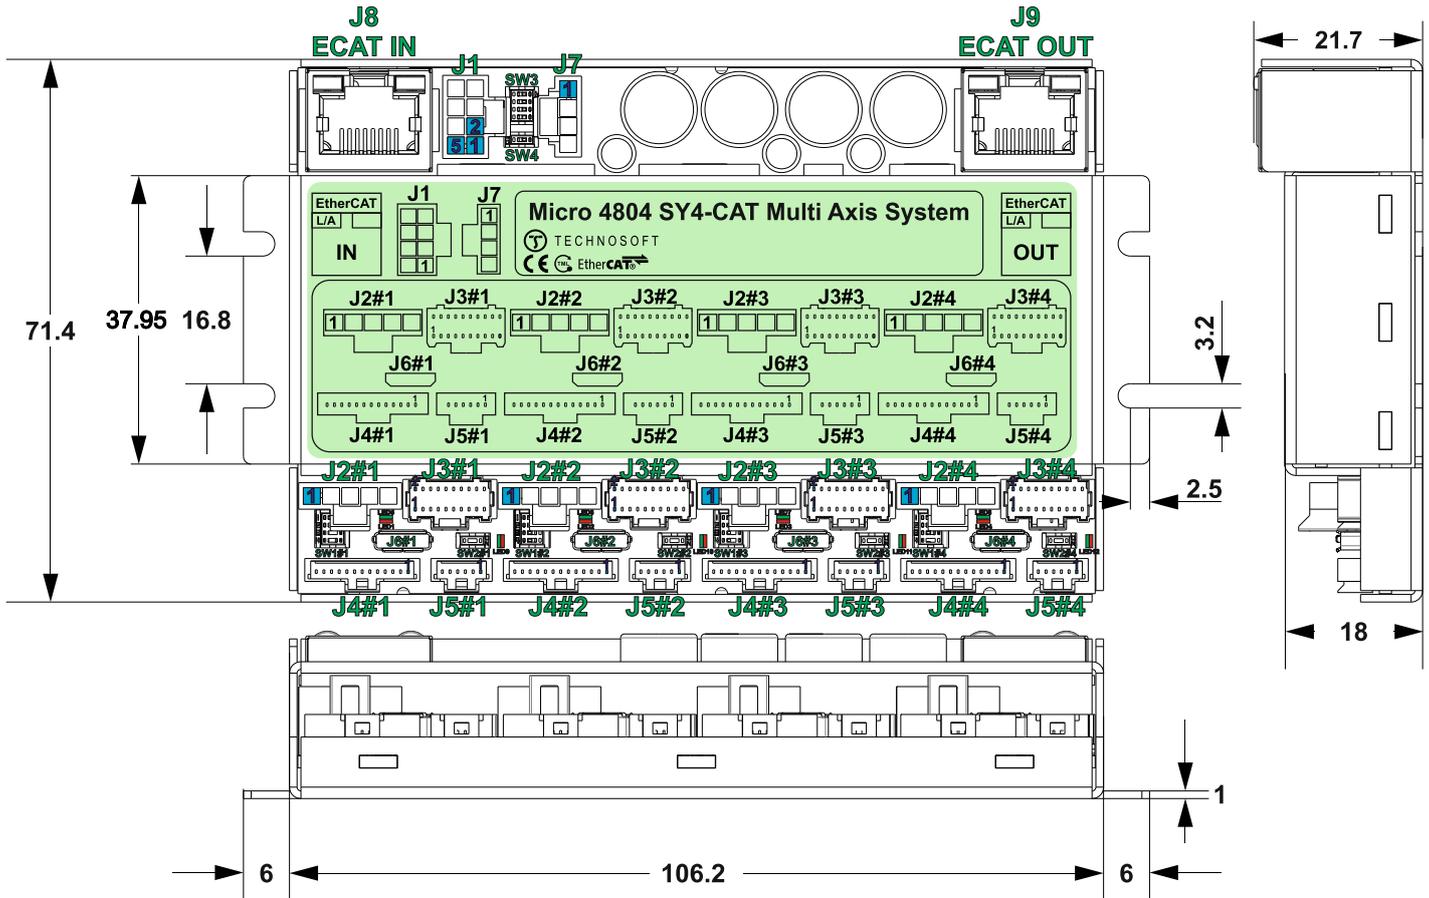

All dimensions are in mm. Drawing not to scale.

Motor – sensor configurations					
Sensor	Motor				
	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	Ⓢ		Ⓢ	Ⓢ	
Incr. Encoder + Dig. Hall	Ⓢ	Ⓢ			
Linear Halls	Ⓢ				
Digital Hall control only	Ⓢ				
BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic	Ⓢ	Ⓢ	Ⓢ	Ⓢ	
Tacho			Ⓢ		
Open-loop (no sensor)				Ⓢ	Ⓢ

Features

- Compact 4-axis EtherCAT motion system that integrates a motion controller and drive into a single unit, powered by MotionChip™ technology.
- Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
- Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
- Motor supply: 48V nominal
- Motor output current per axis:
 - Nominal: 4A_{RMS} / 5.7A amplitude for PMSM motors
5A for DC / BLDC / Step motors
 - Peak: 11.3A_{RMS} / 16A amplitude
- Logic supply: 24V nominal, 48V max

- Feedback Devices per axis:
 - 1 x Hall sensor interface (digital or linear)
- Feedback#1 and Feedback#2 can be:
 - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
 - Absolute encoder: differential or single-ended. Supported protocols: SSI, BiSS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- Integrated termination resistors for each axis's feedback connectors, selectable via sliding switches
- 1 x analogue input per axis, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs per axis: 2 for limit switches + one Enable, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os per axis, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 50mA.
- EtherCAT connection: standard RJ45 ports
- Commissioning (set-up) possible through RS232, USB, FoE (File-over-EtherCAT) or EoE (Ethernet-over-EtherCAT)
- 24Kwords E²ROM per axis to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory per axis for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t drive & motor, control error
- >98% voltage efficiency, >98% power efficiency

Name ALN	First edition July 11, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
		Title of document Micro 4804 SY4-CAT Multi Axis System PRODUCT DATA SHEET	N° document P020.202.E404.DSH.10K	Page: 1 of 5



Micro 4804 SY4-CAT Multi Axis System DATASHEET P/N: P020.202.E404

Mating Connectors			
Producer	Part No.	Connector	Description
Molex	1053071204	J7	1x4 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 4 circuits
Molex	1053071205	J2#x1	1x5 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 5 circuits
Molex	5011892010	J3#x1	2x10 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 20 Circuits
Molex	5013301300	J4#x1	1x13 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 13 Circuits
Molex	1053081208	J1	Nano-Fit Receptacle Housing, TPA Capable, 2.5mm Pitch, Dual Row, 8 Circuits, Black, Glow-Wire Capable
Tensility International Corp	1002333	J6#x1	USB cable, Cable USB A Male - Micro B Male, 1m, shielded, black, 9.6mm plastic width
Molex	0797582140	J1, J7, J2#x1	Pre-Crimped wires for Nano-Fit
Molex	0797581019	J3#x1, J4#x1	Pre-Crimped wires for Pico-Clasp
Molex	1053002400	J1, J7, J2#x1	Pins for Nano-Fit
Molex	5011937000	J3#x1, J4#x1	Pins for Pico-Clasp
Molex	638275600	J1, J7, J2#x1	Crimp tool Nano Fit
Molex	638191500	J3#x1, J4#x1	Crimp tool Pico-Clasp

Pin	Name	Type	Description
1,2,3	+Vmot	I	Positive terminal of the motor supply: 7 to 48 V _{DC} . Internally connected to all 4 drives +V _{mot} pins.
4	PE	-	Earth connection.
5,6,7	GND	-	Ground return. Internally connected to other GND pins.
8	PE	-	Earth connection

Pin	Name	Type	Description
1	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
2	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
3	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
4	Cr/B-	O	Chopping resistor / Phase B- for 2-ph steppers
5	PE	-	Earth connection for motor cable shielding

Pin	Name	Type	Description
1	232TX	O	RS-232 Data Transmission.
2	232RX	I	RS-232 Data Reception.
3	GND	-	Ground return.
4	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.
5	IN2/LSP	I	5-48V digital NPN input. Positive limit switch input.
6	IN3/LSN	I	5-48V digital NPN input. Negative limit switch input.
7	I/O0	I/O	5-48V 1.5A NPN (sink) general-purpose digital programmable output OUT0 or input IN0
8	I/O1	I/O	5-48V 50mA NPN (sink) general-purpose digital programmable output OUT1 or input IN1
9	I/O4	I/O	5-48V 50mA NPN (sink) general-purpose digital programmable output OUT4 or input IN4
10	IN5/Enable	I	5-48V digital NPN input. Drive Enable input.
11	GND	-	Ground return. Internally connected to other GND pins.
12	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)
13	+5V	O	Supply for all feedback sensors.

Pin	Name	Type	Description
1	GND	-	Ground return. Internally connected to other GND pins.
2	Hall1	I	Digital Hall, or Linear Hall sensor 1.
3	+5V	O	5V supply for all feedback sensors.
4	Hall2	I	Digital Hall, or Linear Hall sensor 2.
5	+5V	O	5V supply for all feedback sensors.
6	Hall3	I	Digital Hall, or Linear Hall sensor 3.
7	EncA1+/EncA1 Dt1+/Dt1	I	Encoder 1 A+ / Data+ diff. input or single-ended input. Set SW1 pin 1 for differential.
8	GND	-	Ground return.
9	EncA1-/Dt1-	I	Encoder 1 A-/Data- diff. input. Set SW1 pin 1 for differential.
10	+5V	O	5V supply for all feedback sensors.
11	EncB1+/EncB1 Clk1+/Clk1	I	Encoder 1 B+ / Clock+ diff. input or single-ended input. Set SW1 pin 2 for differential.
12	EncA2+/EncA2 Dt2+/Dt2	I	Incr. encoder 2 A / Data+ diff. input or single-ended input. Set SW1 pin 4 for differential.
13	EncB1-/Clk1-	I	Encoder 1 B- / Clock- diff. input. Set SW1 pin 2 for differential.
14	EncA2-/Dt2-	I	Incr. encoder 2 A- / Data- diff. input. Set SW1 pin 4 for differential.
15	Z1+	I	Incr. encoder 1 Z / Z+ diff. input or single-ended input. Set SW1 pin 3 for differential.
16	EncB2+/EncB2 Clk2+/Clk2	I/O	Encoder 2 B+ / Clock+ diff. input or single-ended input. Set SW2 pin1 for differential.
17	Z1-	I	Incr. encoder 1 Z- diff. input. Set SW1 pin 3 for differential.
18	EncB2-/Clk2-	I	Encoder 2 B- / Clock- diff. input. Set SW2 pin1 for differential.
19	GND	-	Ground return.
20	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.

Port	Name	Type	Description
J8	ECAT IN	I	EtherCAT standard RJ45 Ethernet IN port.
J9	ECAT OUT	O	EtherCAT standard RJ45 Ethernet OUT port.
J6#x1	USB	I/O	Standard Micro USB for PC data transfer

Pin	Name	Type	Description
J5#x1	Reserved.	-	Reserved. Do not connect.

Pin	Name	Type	Description
1	Rsvd	-	Reserved. Do not connect.
2	GND	-	Ground return. Internally connected to other GND pins.
3	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to all 4 drives +V _{log} pins.
4	PE	-	Earth connection

SW1#x1 – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncA1-/Dt1- and EncA1+/EncA1/Dt1+/Dt1 feedback pins.
2	ON = Connect an 120Ω resistor between EncB1/Clk1- and EncB1+/EncB1/Clk1+/Clk1 feedback pins.
3	ON = Connect an 120Ω resistor between Z1- and Z1+ feedback pins.
4	ON = Connect an 120Ω resistor between EncA2-/Dt2- and EncA2+/EncA2/Dt2+/Dt2 feedback pins.

SW2#x1 – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncB2-/Clk2- and EncB2+/EncB2/Clk2+/Clk2 feedback pins.

LEDs			
LED1, LED2, LED3, LED4	RED	EtherCAT® ERROR indicator.	
LED5, LED6, LED7, LED8	GREEN	EtherCAT® RUN indicator.	
LED9 → drive #1	TML	RED	Turned on when the drive detects an error condition.
LED10 → drive #2	ERR		
LED11 → drive #3	TML		
LED12 → drive #4	RDY	GREEN	Lit after power-on when the drive initialization ends. Turned off when an error occurs.

1 "x" can be drive 1, 2, 3 or 4

Name ALN	First edition July 11, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY4-CAT Multi Axis System PRODUCT DATA SHEET	N° document P020.202.E404.DSH.10K	Page: 2 of 5



Micro 4804 SY4-CAT Multi Axis System DATASHEET P/N: P020.202.E404

Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink) 24V			
Load type		Resistive, Inductive			
Default state	Not supplied (+V _{LOG} floating)	High-Z (floating)			
	Immediately after power-up	Logic "HIGH"			
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4			0.4	V
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
Output current	Absolute maximum, surge (duration ≤ 1s) [†]	-1		V _{LOG} +1	A
	Logic "LOW", sink current, short duration, duty cycle ≤1%	5s max	0.15	0.1	
		0.5s max	0.15	2	
			0.15	0.15	
			0.15	2.5	
			0.05	0.05	
Output current	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V			1.5	mA
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V			5	
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	
		V _{LOG} =48V	0.42	0.45	mA
Minimum pulse width		0.5			μs
ESD protection - Human body model		±25			kV
Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 400mA ¹	5.05	5.2	5.25	V
Output current ¹	Output voltage ≥ 4.85V			1,200	mA
Short-circuit to GND protection		Yes / Drive resets at event			
Over-voltage protection		NOT protected			
ESD protection	Human body model	±1			KV
Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-)²		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave A1-, B1-, Z1-, A2-, B2- floating	TTL / CMOS / Open-collector (NPN sink)			
Single-ended threshold	A1+, B1+, Z1+, A2+, B2+	1.3	1.4	1.5	V
Single-ended input current	Input pulled to GND against on-board 2.2 KΩ pull-up to +5V		2.4	2.7	mA
Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Input voltage	Hysteresis	±0.03	±0.05	±0.2	V
	Differential mode	-15		+15	
	Common-mode range (A+ to GND, etc.)	-7		+12	
Input impedance, differential	Common-mode (A1+ to GND, etc.)		2.2		kΩ
	Differential (A1+ to A1-, etc.)		4.4		
Input frequency	Differential mode	0		15	MHz
Minimum pulse width	Differential mode	33			ns
ESD protection	Human body model	±30			kV
RS-232		Min.	Typ.	Max.	Units
Compliance		TIA/EIA-232-C			
Bit rate	Default	9600			
	Software selectable	9600		115200	Baud
Output voltage		±5	±5.7		V
Short-circuit		Guaranteed			
Input voltage	Absolute maximum, continuous	-30		+30	V
ESD protection	Human body model	±15			kV
Absolute encoder interface: SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki		Min	Typ.	Max	Units
Single-ended mode	Not recommended, reduced robustness & speed				
Differential mode compliance	For full RS422 compliance, see ²	TIA/EIA-422-A			
Output voltage	Differential; 50Ω differential load	1.5	3.3		V
	Common-mode, referenced to GND	1	1.7	3	
CLOCK frequency	Nikon, Sanyo Denki	2.5, 4			
	Panasonic, Tamagawa	2.5			
	All others	1, 2, 3, 4			
Output Short-circuit protection	Common-mode voltage ±15V	Yes, protected			
DATA format	Software selectable	Binary / Gray			
		Single-turn / Multi-turn			
		Counting direction			
		CRC type			
DATA resolution	Including CRC, flags, ...		64		Bits
If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution					

Analog Input (REF/ FDBK)		Min	Typ.	Max	Units
Input voltage	Operational range	0...5, -10...+10			
	Absolute maximum values, continuous	-22		+26	V
	Absolute maximum, surge (duration ≤ 1s)			±38	
Input impedance	To 1.44V		20		kΩ
Bandwidth (-3dB)	Software selectable	0		5.3	kHz
Resolution			12		bits
Integral linearity				±1	bits
Offset error	Range -10V ... +10V		±10	±30	mV
	Range 0 ... +5V		±15	±40	
Gain error	Range -10V ... +10V		±30	±50	mV
	Range 0 ... +5V		±25	±40	
ESD protection	Human body model	±1.5			kV
EtherCAT®		Min.	Typ.	Max.	Units
Compliance		IEEE802.3, IEC61158			
Software protocols compatibility		CoE, FoE, EoE, IEC61800-7-301			
Transmission line	According to TIA/EIA-568-5-A	5	5e	6	Category
		UTP	FTP	STP	Shield
Auto	swap + / - inside a pair	Yes (MLT3 encoding)			
	swap Rx / Tx pairs	Yes (auto-MDI/MDIX)			
Swap port0(IN) / port1(OUT)		NO (EtherCAT requirement)			
Configured Station Alias (using AxisID)		1 + 252			
ESD protection	Human body model	±5			kV

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.


¹ Specified currents are intended per drive. Each drive has separate +5V outputs

² To achieve full RS-422 compatibility and enhance noise rejection, it is necessary to connect an 120Ω resistor across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-). This can be done through SW1 and SW2.


Name ALN	First edition July 11, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY4-CAT Multi Axis System PRODUCT DATA SHEET	N° document P020.202.E404.DSH.10K	Page: 4 of 5




Micro 4804 SY

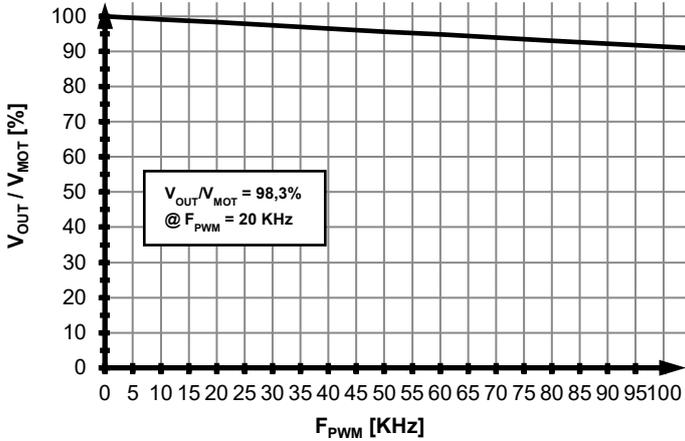


Micro 4804 SY

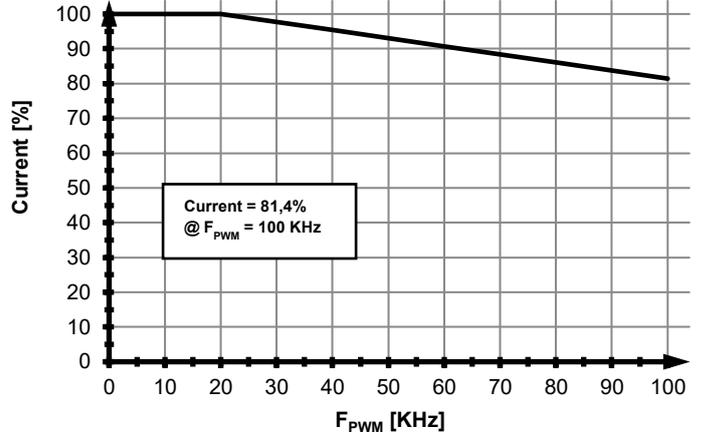


Micro 4804 SY

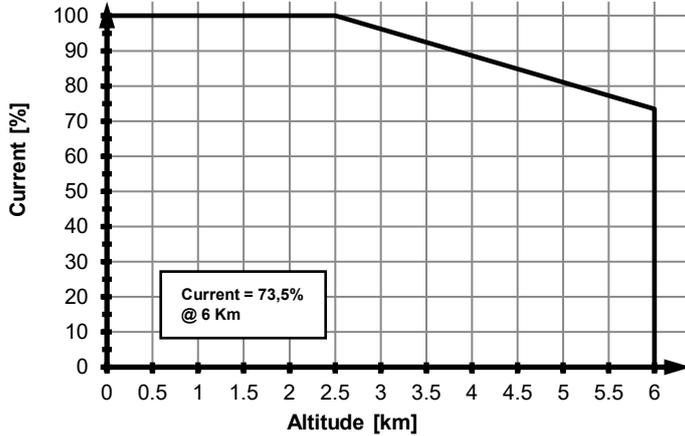

Micro 4804 SY

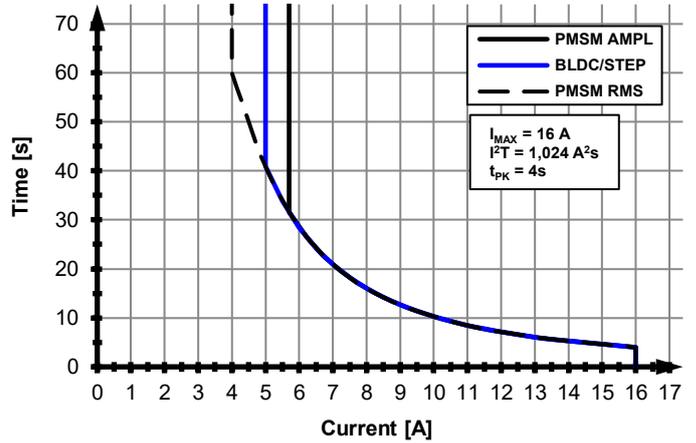

Micro 4804 SY

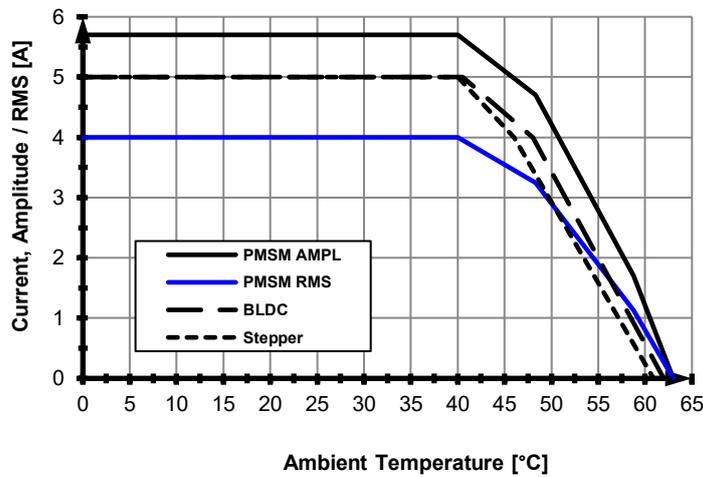

Name ALN	First edition July 11, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY4-CAT Multi Axis System PRODUCT DATA SHEET	N° document P020.202.E404.DSH.10K Page: 5 of 5	