




iPOS3604 HX-CAN Single-Ended DATASHEET

P/N: P028.002.E561

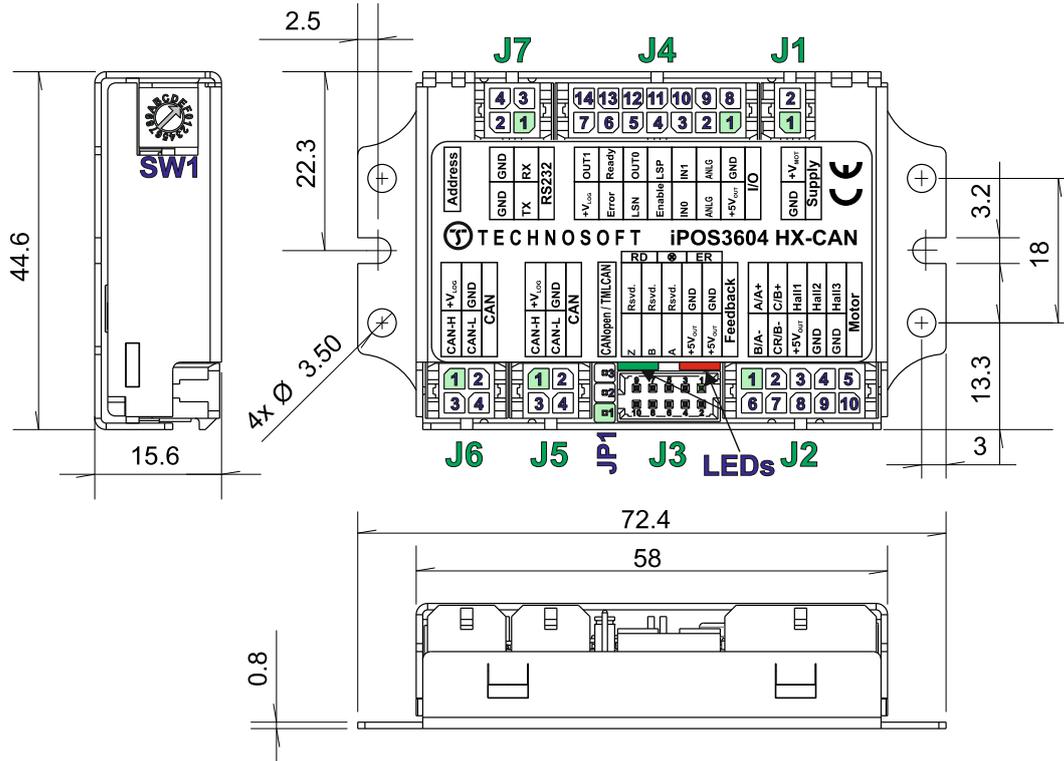

All dimensions are in mm.

Motor – sensor configurations

| Sensor | Motor | | | | |
|------------------------|-------|------|----------|-------------|-------------|
| | PMSM | BLDC | DC BRUSH | STEP (2-ph) | STEP (3-ph) |
| Incr. Encoder | Ⓢ | | Ⓢ | Ⓢ | |
| Incr. Encoder + Hall | Ⓢ | Ⓢ | | | |
| Analog Sin/Cos encoder | Ⓢ | | | | |
| Tacho | | | Ⓢ | | |
| Open-loop (no sensor) | | | | Ⓢ | Ⓢ |

Mating Connectors

| Producer | Part No. | Connector | Description | Wire Gauge |
|----------|------------|--------------------|---------------------------------------|------------|
| MOLEX | 43025-0200 | J1 | MICROFIT RECEPTACLE HOUSING, 2x1 WAY | AWG 20..24 |
| MOLEX | 43025-0400 | J5,J6,J7 | MICROFIT RECEPTACLE HOUSING, 2x2 WAY | AWG 20..24 |
| MOLEX | 43025-1000 | J2 | MICROFIT RECEPTACLE HOUSING, 2x5 WAY | AWG 20..24 |
| MOLEX | 43025-1400 | J4 | MICROFIT RECEPTACLE HOUSING, 2x7 WAY | AWG 20..24 |
| MOLEX | 43030-0007 | J1,J2,J4, J5,J6,J7 | CRIMP PIN, ZMICROFIT, 5A | AWG 20..24 |
| MOLEX | 51110-1056 | J3 | MILLIGRID RECEPTACLE HOUSING, 2x5 WAY | AWG 24..30 |
| MOLEX | 50394-8400 | J3 | CRIMP PIN, MILLIGRID | AWG 24..30 |

Features

- Motor supply: 9-36V. Optional logic supply: 9-36V
- Output current: 4A cont. (BLDC mode); 10A_{PEAK}, up to 100KHz PWM
- Digital Hall sensor interface (single-ended and open collector)
- Incremental single-ended encoder interface
- 5 digital inputs, 5-36V, PNP or NPN software selectable: Enable, 2 for limit switches, 2 general-purpose
- 4 digital outputs, 5-36V, 0.5A, NPN open-collector: Ready, Error, 2 general-purpose
- 1 analogue input: 12-bit, 0-5V: Reference or feedback or general purpose
- RS-232 serial & CAN-bus 2.0B interfaces with H/W selectable addresses
- TMLCAN and CANopen (CiA 301 v4.2 and CiA 402 v3.0) protocols selectable by jumper
- 2K × 16 SRAM for data acquisition
- 4K × 16 E²ROM to store TML motion programs and data
- Operating ambient temperature: 0-40°C (over 40°C with derating)
- Hardware Protections: short-circuit between motor phases and from motor phases to GND, over-voltage, under-voltage and I²t
- Firmware: F508M+

| | | | | |
|-------------|------------------------------------|---|---|--------------|
| Name ALN | First edition December 11, 2023 | Document template: P099.TQT.564.0001 | Last edition December 11, 2023 | Visa: |
| | | Title of document iPOS3604 HX-CAN Single-Ended PRODUCT DATA SHEET | N° document P028.002.E561.DSH.10B | |
| | | | | Page: 1 of 4 |



iPOS3604 HX-CAN Single-Ended DATASHEET

P/N: P028.002.E561



Connector Description

| Pin | Name | Type | Description |
|-----|-------------------|------|--|
| 1 | GND | - | Negative return (ground) of the power supply |
| 2 | +V _{MOT} | I | Positive terminal of the motor supply: 9 to 36V _{DC} / Positive terminal of the internal logic supply if J4 pin 7 not connected (I/Os work only when J4 pin 7 is connected) |

| Pin | Name | Type | Description |
|-----|--------------------|------|---|
| 1 | A/A+ | O | Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors |
| 2 | C/B+ | O | Phase C for 3-ph motors, B+ for 2-ph steppers |
| 3 | Hall 1 | I | Digital input Hall 1 sensor |
| 4 | Hall 2 | I | Digital input Hall 2 sensor |
| 5 | Hall 3 | I | Digital input Hall 3 sensor |
| 6 | B/A- | O | Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors |
| 7 | CR/B- | O | Chopping resistor / Phase B- for step motors |
| 8 | +5V _{OUT} | O | 5V output supply - internally generated |
| 9 | GND | - | Negative return (ground) of the motor supply |
| 10 | GND | - | Negative return (ground) of the motor supply |

| Pin | Name | Type | Description |
|-----|--------------------|------|----------------------------------|
| 1 | GND | - | Return ground for sensors supply |
| 2 | +5V _{OUT} | O | 5V output supply for I/O usage |
| 3 | GND | - | Return ground for sensors supply |
| 4 | +5V _{OUT} | O | 5V output supply for I/O usage |
| 5 | Rsvd. | - | Reserved. Do not connect. |
| 6 | A | I | Incr. encoder A single-ended |
| 7 | Rsvd. | - | Reserved. Do not connect. |
| 8 | B | I | Incr. encoder B single-ended |
| 9 | Rsvd. | - | Reserved. Do not connect. |
| 10 | Z | I | Incr. encoder Z single-ended |

| Pin | Name | Type | Description |
|-----|-------------------|------|---|
| 1 | +V _{LOG} | O | Positive terminal of the logic supply: 9 to 36V _{DC} |
| 2 | GND | - | Return ground for CAN-Bus |
| 3 | Can-Hi | I/O | CAN-Bus positive line (dominant high) |
| 4 | Can-Lo | I/O | CAN-Bus negative line (dominant low) |

| Pin | Name | Type | Description |
|-----|-------|------|-------------------------------|
| 1 | 232TX | O | RS-232 Data Transmission |
| 2 | GND | - | Return ground for RS-232 pins |
| 3 | 232RX | I | RS-232 Data Reception |
| 4 | GND | - | Return ground for RS-232 pins |

| Position | Description |
|----------|---------------------------------------|
| 1-2 | Select CANopen communication protocol |
| 2-3 | Select TMLCAN communication protocol |

| Pin | Name | Type | Description |
|-----|--------------------------------|------|--|
| 1 | +5V _{OUT} | O | 5V output supply for I/O usage |
| 2 | ANLG | I | Analogue input, 12-bit, 0-5V. Used to read an analog position, speed or torque reference, or an analogue position or speed feedback or as general purpose analogue input |
| 3 | IN0 | I | 5-36V general-purpose digital PNP/NPN input |
| 4 | IN4/Enable | I | 5-36V digital PNP input. Drive enable input |
| 5 | IN3/LSN | I | 5-36V digital PNP input. Negative limit switch input |
| 6 | OUT2/Error | O | 5-36V 0.5A, drive Error output, active low, NPN open-collector/TTL pull-up. Also drives the red LED |
| 7 | +V _{LOG} ¹ | I | Positive terminal of the logic supply for inputs and outputs operation: 9 to 36V _{DC} |
| 8 | GND | - | Return ground for I/O pins |
| 9 | ANLG | I | Analogue input, 12-bit, 0-5V. Used to read an analog position, speed or torque reference, or an analogue position or speed feedback or as general purpose analogue input |
| 10 | IN1 | I | 5-36V general-purpose digital PNP/NPN input |
| 11 | IN2/LSP | I | 5-36V digital PNP/NPN input. Positive limit switch input |
| 12 | OUT0 | O | 5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up |
| 13 | OUT3/Ready | O | 5-36V 0.5A, drive Ready output, active low, NPN open-collector/TTL pull-up. Also drives the green LED. |
| 14 | OUT1 | O | 5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up |

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- T_{amb} = 0...40°C; V_{LOG} = 24 VDC; V_{MOT} = 36VDC
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude / continuous BLDC, DC, stepper) = 4A

| Operating Conditions | Min. | Typ. | Max. | Units | |
|----------------------------------|--|----------------|----------|-------------------------------|------|
| Ambient temperature ² | 0 | | +40 | °C | |
| Ambient humidity | Non-condensing | 0 | 90 | %Rh | |
| Altitude / pressure ³ | Altitude (vs. sea level) | -0.1 | 0 + 2.5 | Km | |
| | Ambient Pressure | 0 ² | 0.75 + 1 | 10.0 atm | |
| Storage Conditions | Min. | Typ. | Max. | Units | |
| Ambient temperature | -40 | | +85 | °C | |
| Ambient humidity | Non-condensing | 0 | 100 | %Rh | |
| Ambient Pressure | 0 | | 10.0 | atm | |
| Mechanical Mounting | Min. | Typ. | Max. | Units | |
| Airflow | natural convection ⁴ , closed box | | | | |
| Environmental Characteristics | Min. | Typ. | Max. | Units | |
| Size (Length x Width x Height) | Without mating connectors | | | 72.4 x 44.6 x 15.6 | mm |
| | With mating connectors | | | ~2.85 x 1.76 x 0.61 | inch |
| Weight | Without mating connectors | | | 48 | g |
| | With mating connectors | | | | |
| Power dissipation | Idle (no load) | | | 1 | W |
| | Operating | | | 3 | 5 |
| Efficiency | | | | 98 | % |
| Cleaning agents | Dry cleaning is recommended | | | Only Water- or Alcohol- based | |
| Protection degree | According to IEC60529, UL508 | | | IP20 | |

¹ If +V_{LOG} (J4 pin7) is not connected, the digital outputs and inputs will not be operational.

² Operating temperature can be extended up to +65°C with reduced current and power ratings.

³ iPOS360x can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

⁴ It is recommended to mount the iPOS3604 HX-CAN on a metallic support using the provided mounting holes, for better reliability and reduced de-rating due to heat dissipation

| | | | | |
|-------------|------------------------------------|---|---|-------|
| Name ALN | First edition December 11, 2023 | Document template: P099.TQT.564.0001 | Last edition December 11, 2023 | Visa: |
| | | Title of document iPOS3604 HX-CAN Single-Ended PRODUCT DATA SHEET | N° document P028.002.E561.DSH.10B | |
| | | | Page: 2 of 4 | |



iPOS3604 HX-CAN Single-Ended DATASHEET

P/N: P028.002.E561



| Logic Supply Input (+V _{LOG}) | | Min. | Typ. | Max. | Units |
|---|--|-------------------------|------|------|-----------------|
| Supply voltage | Nominal values | 9 | | 36 | V _{DC} |
| | Absolute maximum values, drive operating but outside guaranteed parameters | 5.9 | | 39 | V _{DC} |
| | Absolute maximum values, continuous | 0 | | 39 | V _{DC} |
| | Absolute maximum values, surge (duration ≤ 10ms) [†] | 0 | | +45 | V |
| Supply current | No Load on Digital Outputs | +V _{LOG} = 9V | 125 | 300 | mA |
| | | +V _{LOG} = 12V | 80 | 200 | |
| | | +V _{LOG} = 24V | 50 | 125 | |
| | | +V _{LOG} = 39V | 40 | 100 | |
| Motor Supply Input (+V _{MOT}) | | Min. | Typ. | Max. | Units |
| Supply voltage | Nominal values | 9 | | 36 | V _{DC} |
| | Absolute maximum values, drive operating but outside guaranteed parameters | 8.5 | | 40 | V _{DC} |
| | Absolute maximum values, continuous | 0 | | 42 | V _{DC} |
| | Absolute maximum values, surge (duration ≤ 10ms) [†] | 0 | | +45 | V |
| Supply current | Idle | | 1 | 5 | mA |
| | Operating | -3.2 | ±2 | +3.2 | A |
| | Absolute maximum value, short-circuit condition (duration ≤ 10ms) [†] | | | 5 | A |
| Motor Outputs (A/A+, B/A-, C/B+, CR/B-) | | Min. | Typ. | Max. | Units |
| Nominal output current, continuous | for DC brushed, steppers and BLDC motors with Hall-based trapezoidal control | | | 4 | A |
| | for PMSM motors with FOC sinusoidal control (sinusoidal amplitude value) | | | 4 | |
| | for PMSM motors with FOC sinusoidal control (sinusoidal effective value) | | | 2.82 | |
| Motor output current, peak | maximum 2.5s | -10 | | +10 | A |
| Short-circuit protection threshold | measurement range | | ±13 | ±15 | A |
| Short-circuit protection delay | | 5 | 10 | | µs |
| On-state voltage drop | Nominal output current; including typical mating connector contact resistance | | ±0.3 | ±0.5 | V |
| Off-state leakage current | | | ±0.5 | ±1 | mA |
| Motor inductance (phase-to-phase) | Recommended value, for current ripple max. ±5% of full range; +V _{MOT} = 36 V | F _{PWM} | | | µH |
| | | 20 kHz | 250 | | |
| | | 40 kHz | 120 | | |
| | | 60 kHz | 100 | | |
| | | 80 kHz | 60 | | |
| | Minimum value, limited by short-circuit protection; +V _{MOT} = 36 V | 20 kHz | 75 | | µH |
| | | 40 kHz | 25 | | |
| | | 60 kHz | 20 | | |
| | | 80 kHz | 10 | | |
| | | 100 kHz | 5 | | |
| Motor electrical time-constant (L/R) | Recommended value for ±5% current measurement error | 20 kHz | 250 | | µs |
| | | 40 kHz | 125 | | |
| | | 60 kHz | 100 | | |
| | | 80 kHz | 63 | | |
| | | 100 kHz | 50 | | |
| Current measurement | FS = Full Scale accuracy | | ±4 | ±8 | %FS |

| Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4/Enable) | | Min. | Typ. | Max. | Units |
|---|--|--|------|------|-------|
| Mode compliance | | PNP | | | |
| Default state | | Input floating (wiring disconnected) | | | |
| | | Logic LOW | | | |
| Input voltage | Logic "LOW" | | 0 | 1.6 | V |
| | Logic "HIGH" | 1.8 | 24 | 39 | |
| | Floating voltage (not connected) | | 0 | | |
| | Absolute maximum, continuous | -10 | | +39 | |
| | Absolute maximum, surge (duration ≤ 1s) [†] | -20 | | +40 | |
| Input current | Logic "LOW"; pulled to GND | | 0 | 0 | mA |
| | Logic "HIGH" | | 2.9 | 3.4 | |
| Mode compliance | | NPN/ TTL / CMOS / LVTTTL (3.3V) / Open-collector | | | |
| Default state | | Input floating (wiring disconnected) | | | |
| | | Logic HIGH | | | |
| Input voltage | Logic "LOW" | 2 | 5+24 | | V |
| | Logic "HIGH" | | 3 | | |
| | Floating voltage (not connected) | -10 | | +30 | |
| | Absolute maximum, continuous | -20 | | +40 | |
| | Absolute maximum, surge (duration ≤ 1s) [†] | 2 | 5+24 | | |
| Input current | Logic "LOW"; Pulled to GND | | 0.6 | 1 | mA |
| | Logic "HIGH"; Internal 4.7KΩ pull-up to +3.3 | 0 | 0 | 0 | |
| | Logic "HIGH"; Pulled to +5V | | 0.15 | 0.2 | |
| | Logic "HIGH"; Pulled to +24V | | 2 | 2.5 | |
| Input frequency | | 0 | | 150 | kHz |
| Minimum pulse | | 3.3 | | | µs |
| ESD protection | Human body model | ±5 | | | kV |

| Digital Outputs (OUT0, OUT1, OUT2/Error, OUT3/ Ready) | | Min. | Typ. | Max. | Units |
|---|---|---|------------------|-----------------------|-------|
| Mode compliance | | All outputs (OUT0, OUT1, OUT2/Error, OUT3/Ready) | | | |
| | | TTL / CMOS / Open-collector / NPN 24V | | | |
| Default state | | Not supplied (+V _{LOG} floating or to GND) | | | |
| | | High-Z (floating) | | | |
| Default state | Immediately after power-up | OUT0, OUT1 | | Logic "HIGH" | |
| | | OUT2/Error, OUT3/ Ready | | Logic "LOW" | |
| | Normal operation | OUT0, OUT1 | | Logic "HIGH" | |
| | | OUT2/Error | | Logic "LOW" | |
| Output voltage | Logic "LOW"; output current = 0.5A | | 0.2 | 0.8 | V |
| | Logic "HIGH"; output current = 0, no load | 2.9 | 3 | 3.3 | |
| | Logic "HIGH"; external load to +V _{LOG} | | V _{LOG} | | |
| | Absolute maximum, continuous | -0.5 | | V _{LOG} +0.5 | |
| | Absolute maximum, surge (duration ≤ 1s) [†] | -1 | | V _{LOG} +1 | |
| Output current | Logic "LOW", sink current, continuous | | | 0.5 | A |
| | Logic "LOW", sink current, pulse ≤ 5 sec. | | | 1 | |
| | Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V | | | 2 | mA |
| | | | | 4 | |
| | Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V | | 0.1 | 0.2 | mA |
| Minimum pulse width | | 2 | | | µs |
| ESD protection | Human body model | ±15 | | | kV |

| | | | | |
|-------------|------------------------------------|---|---|-------|
| Name ALN | First edition December 11, 2023 | Document template: P099.TQT.564.0001 | Last edition December 11, 2023 | Visa: |
| | | Title of document iPOS3604 HX-CAN Single-Ended PRODUCT DATA SHEET | N° document P028.002.E561.DSH.10B | |
| | | | Page: 3 of 4 | |




iPOS3604 HX-CAN Single-Ended DATASHEET


P/N: P028.002.E561




| Digital Hall Inputs (Hall1, Hall2, Hall3) | | Min. | Typ. | Max. | Units |
|---|---|---|------------|--------|-----------------------|
| Mode compliance | TTL / CMOS / Open-collector | | | | |
| Default state | Input floating (wiring disconnected) Logic HIGH | | | | |
| Input voltage | Logic "LOW" | | 0 | 0.8 | V |
| | Logic "HIGH" | 2 | 5 | | |
| | Floating voltage (not connected) | | 4.4 | | |
| | Absolute maximum, surge (duration ≤ 1s) [†] | -10 | | +15 | |
| Input current | Logic "LOW"; Pull to GND | | | 1.2 | mA |
| | Logic "HIGH"; Internal 4.7KΩ pull-up to +5 | 0 | 0 | 0 | |
| Minimum pulse width | | 2 | | | μs |
| ESD protection | Human body model | ±5 | | | kV |
| Encoder Inputs (A, B, Z) | | Min. | Typ. | Max. | Units |
| Input frequency | Single-ended mode, Open-collector / NPN | 0 | | 500 | kHz |
| | Single-ended driven by push-pull (TTL / CMOS) | 0 | | 10 | |
| Minimum pulse width | Single-ended mode, Open-collector / NPN | 1 | | | μs |
| | Single-ended driven by push-pull (TTL / CMOS) | 50 | | | |
| Input voltage, any pin to GND | Absolute maximum values, continuous | -7 | | +7 | V |
| | Absolute maximum, surge (duration ≤ 1s) [†] | -11 | | +14 | |
| ESD protection | Human body model | ±1 | | | kV |
| Analog 0...5V Input (ANLG) | | Min. | Typ. | Max. | Units |
| Input voltage | Operational range | 0 | | 4.95 | V |
| | Absolute maximum values, continuous | -12 | | +18 | |
| | Absolute maximum, surge (duration ≤ 1s) [†] | | | ±36 | |
| Input impedance | To GND | | 30 | | kΩ |
| Resolution | | | 12 | | bits |
| Integral linearity | | | | ±2 | bits |
| Offset error | | | | ±2 | bits |
| Gain error | | | | ±1% | ±3% % FS ¹ |
| Bandwidth (-3dB) | Software selectable | 0 | | 1 | kHz |
| ESD protection | Human body model | ±5 | | | kV |
| RS-232 | | Min. | Typ. | Max. | Units |
| Compliance | TIA/EIA-232-C | | | | |
| Bit rate | Software selectable | 9600 | | 115200 | Baud |
| Short-circuit | 232TX short to GND | | Guaranteed | | |
| ESD protection | Human body model | ±2 | | | kV |
| CAN-Bus | | Min. | Typ. | Max. | Units |
| Compliance | ISO11898, CiA-301v4.2, 402v3.0 | | | | |
| Bit rate | Software selectable | 125 | | 1000 | Kbps |
| Bus length | 1Mbps | | | 25 | m |
| | 500Kbps | | | 100 | |
| | ≤ 250Kbps | | | 250 | |
| Resistor | Between CAN-Hi, CAN-Lo | none on-board | | | |
| Node addressing | Hardware: by Hex switch | 1-15 & 255 | | | |
| | Software | 1 + 127; 255 (CANopen); 1- 255 (TMLCAN) | | | |
| Voltage, CAN-Hi or CAN-Lo to GND | | -26 | | 26 | V |
| ESD protection | Human body model | ±15 | | | kV |
| Supply Output (+5V) | | Min. | Typ. | Max. | Units |
| Output voltage | Current sourced = 250mA | 4.8 | 5 | 5.2 | V |
| Output current | | 250 | 350 | | mA |
| Short-circuit | | NOT protected | | | |
| Over-voltage | | NOT protected | | | |
| ESD protection | Human body model | ±1 | | | kV |
| Conformity | | Min. | Typ. | Max. | Units |
| EU Declaration | 2014/30/EU (EMC), 2014/35/EU (LVD), 2011/65/EU (RoHS), 1907/2006/EC (REACH), 93/68/EEC (CE Marking Directive), EC 428/2009 (non dual-use item, output frequency limited to 590Hz) | | | | |

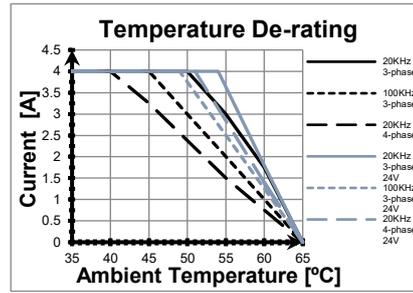


De-rating with ambient temperature

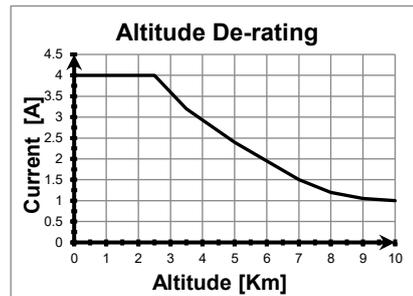


De-rating with altitude

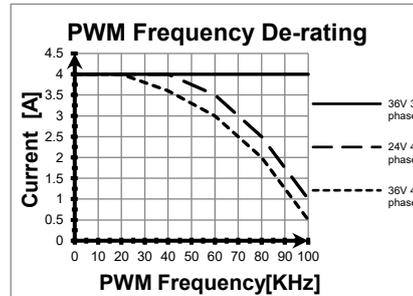

Current De-rating with PWM frequency

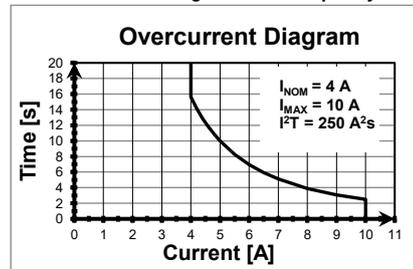

Over-current diagram

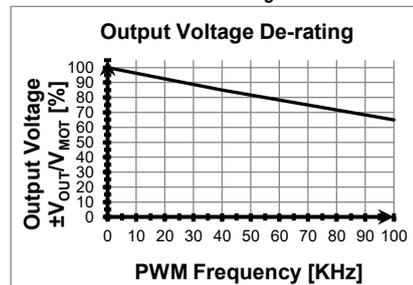

Output Voltage De-rating with PWM frequency²

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ "FS" stands for "Full Scale"

² V_{OUT} – the output voltage, V_{MOT} – the motor supply voltage

| | | | | |
|------|-------------------|--------------------------------------|------------------------------|--------------|
| Name | First edition | Document template: P099.TQT.564.0001 | Last edition | Visa: |
| ALN | December 11, 2023 | | December 11, 2023 | |
| | | Title of document | N° document | |
| | | iPOS3604 HX-CAN Single-Ended | P028.002.E561.DSH.10B | |
| | | PRODUCT DATA SHEET | | Page: 4 of 4 |