

All dimensions are in mm. Drawing not to scale. Pins facing upward view.

Motor – sensor configurations

Motor Sensor	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	☒			☒	☒
Incr. Encoder + Dig. Hall	☒	☒			
Linear Halls	☒				
Digital Hall control only	☒				
BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic	☒	☒	☒	☒	
Tacho			☒		
Open-loop (no sensor)				☒	☒

Features

- Motion controller and drive in a single compact unit based on MotionChip™ technology
- Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
- Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
- Motor supply: 48V nominal
- Motor output current:
 - Nominal: 5.7A_{RMS} / 8A amplitude for PMSM motors
7A for DC / BLDC / Step motors
 - Peak: 11.3A_{RMS} / 16A amplitude
- Logic supply: 24V nominal, 48V max
- Feedback#1 and Feedback#2 can be:
 - 1 x Hall sensor interface (digital or linear)
- Feedback#1 and Feedback#2 can be:
 - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
 - Absolute encoder: differential or single-ended. Supported protocols: SSI, BISS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- 1 x analogue input, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs: 2 for limit switches + one general-purpose, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1x 1.5A to drive inductive loads (such as mechanical brake), 2x 0.1A.
- Communication interfaces: RS232; USB; TMLCAN and CANopen (CiA 301 v4.2, CiA 305 v.2.2.13 and CiA 402 v3.0) protocols
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/EN61508-3; -4/ EN ISO 13849-1.
- 24Kwords E²ROM to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t drive & motor, control error
- 3 AxisID inputs, for hardware-based address setting
- >98% voltage efficiency, >98% power efficiency

Mating Connectors

Producer	Part No.	Connector	Description
Samtec	SQW-117-01-F-D(-VS)	J1	2x17, 2.0mm THT (SMD) socket
	CLT-117-02-F-D		2x17, 2.0mm SMD pass-through socket
	SQW-110-01-F-D(-VS)	J2	2x10, 2.0mm THT (SMD) socket
	CLT-110-02-F-D		2x10, 2.0mm SMD pass-through socket
	SQW-103-01-F-D(-VS)	J3	2x3, 2.0mm THT (SMD) socket
	CLT-103-02-F-D		2x3, 2.0mm SMD pass-through socket
	SQW-102-01-F-D(-VS)	J4	2x2, 2.0mm THT (SMD) socket
	CLT-102-02-F-D		2x2, 2.0mm SMD pass-through socket

Name ALN	First edition July 17, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
 TECHNOSOFT	Title of document	Micro 4804 PZ-CAN-STO PRODUCT DATA SHEET	N° document P020.003.E302.DSH.10D	Page: 1 of 5



Micro 4804 PZ-CAN-STO DATASHEET

P/N: P020.003.E302

Pin	Name	Type	Description
1	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC}
2	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
3	GND	-	Ground return for logic supply
4	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
5	GND	-	Ground return for motor supply & shield for motor windings cable
6	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
7	+Vmot	I	Positive terminal of the motor supply: 7 to 48 VDC
8	Cr/B-	O	Chopping resistor / Phase B- for 2-ph steppers
9	BFS	I	Boot Fail-Safe: Connect to GND to reprogram firmware in the improbable case when a power loss occurs during a firmware update and the normal firmware recovery fails
10	ID2	I	AxisID2 selection pin. See AxisID register settings table.
11	... Rsvd.	-	Reserved. Do not connect.
14			
15	GND	-	Ground return and shield
16	GND	-	Ground return and shield
17	... Rsvd.	-	Reserved. Do not connect.
20			
21	ID0	I	AxisID0 selection pin. See AxisID register settings table.
22	ID1	I	AxisID1 selection pin. See AxisID register settings table.
23	232TX	O	RS-232 Data Transmission.
24	232RX	I	RS-232 Data Reception.
25	CAN Hi	O	CAN-Bus positive line (dominant high)
26	CAN Lo	I	CAN-Bus negative line (dominant low)
27	IN2/LSP	I	5-48V digital NPN input. Positive limit switch input
28	IN3/LSN	I	5-48V digital NPN input. Negative limit switch input
29	IN5	I	5-48V digital general-purpose NPN input
30	I/O0	I/O	5-48V 1.5A NPN (sink) general-purpose digital programmable input IN0 or output OUT0
31	I/O1	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN1 or output OUT1
32	I/O4	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN4 or output OUT4
33	GND	-	Ground return and shield
34	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)



Nominal[V]	Minimum[V]	Maximum[V]	IDx* Bits	IDx* Value
0.000	0.00	0.53	000	0
1.06	0.53	1.41	001	1
1.76	1.41	2.01	010	2
2.25	2.01	2.43	011	3
2.60	2.43	2.75	100	4
2.89	2.75	3.01	101	5
3.13	3.01	3.22	110	6
3.32	3.22	3.30	111	7

Remarks:

1. If Bit 7 (ID2) = 1 -> TMLCAN mode is selected
2. If Bit 7 (ID2) = 0 -> CANopen mode is selected
3. Bit 6 (MSB of ID2) is ignored, and always considered as "0"
4. The maximum AxisID value is 127 (Bit 0 ... Bit 6)
5. TMLCAN mode: AxisID = (64*ID2_Value - 128) + (8*ID1_Value) + ID0_Value
6. CANopen mode: AxisID = (64*ID2_Value) + (8*ID1_Value) + ID0_Value
7. If all "IDx" pins are left not connected or connected to GND, the AxisID value is 255 and CANopen mode is selected. In this case, the drive will be in "LSS inactive" state and the Green LED will flash at 1 second intervals

* where "x" can be 0, 1 or 2

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings

² In case of forced cooling (conduction or ventilation): a) the ambient temperature requirements may be extended substantially as long as the drive (PCB) temperature is kept below 85 °C; b) the

Pin	Name	Type	Description
1	+V USB	I	USB 5V detect input
2	GND	-	Ground return for USB
3	Hall1	I	Digital Hall, or Linear Hall sensor 1
4	Hall2	I	Digital Hall, or Linear Hall sensor 2
5	Hall3	I	Digital Hall, or Linear Hall sensor 3
6	GND	-	Ground return and shield
7	+5V	O	Supply for all feedback sensors
8	GND	-	Ground return and shield
9	EncA1+/EncA1/ Dt1+/Dt1	I	Encoder 1 A+/Data+ diff. input or single-ended input
10	EncA1-/Dt1-	I	Encoder 1 A-/Data- diff. input. Leave open for single-ended; Add externally 120Ω to pin 9 for differential
11	EncB1+/EncB1/ Clk1+/Clk1	I	Encoder 1 B+/Clock+ diff. input or single-ended input
12	EncB1/ Clk1-	I	Encoder 1 B-/Clock- diff. input. Leave open for single-ended; Add externally 120Ω to pin 11 for differential
13	EncA2+/EncA2/ Dt2+/Dt2	I	Encoder 2 A+/Data+ diff. input or single-ended input
14	EncA2-/Dt2-	I	Encoder 2 A-/Data- diff. input. Leave open for single-ended; Add externally 120Ω to pin 13 for differential
15	EncB2+/EncB2/ Clk2+/Clk2	I/O	Encoder 2 B+/Clock+ diff. input or single-ended input
16	EncB2-/Clk2-	I	Encoder 2 B-/Clock- diff. input. Leave open for single-ended; Add externally 120Ω to pin 15 for differential
17	Z1+	I	Encoder 1 Z+ diff. input or single-ended input
18	Z1-	I	Encoder 1 Z- diff. input. Leave open for single-ended; Add externally 120Ω to pin 17 for differential
19	USB DM	I/O	USB data-
20	USB DP	I/O	USB data+

Pin	Name	Type	Description
1, 2	Rsvd.	-	Reserved. Do not connect.
3	TML RDY	O	Lit after power-on when the drive initialization ends. Turned off when an error occurs. Active high, LV-TTL.
4	TML ERR	O	Turned on when the drive detects an error condition. Active high, LV-TTL.
5, 6	Rsvd.	-	Reserved. Do not connect.

Pin	Name	Type	Description
1	STO1+	I	Safe Torque Off input 1, positive input (opto-isolated, 18±40V)
2	STO2-	I	Safe Torque Off input 2, negative STO1+, STO2+ and return (opto-isolated, 0V)
3	STO1-	I	Safe Torque Off input 1, negative from SELV/ PELV return (opto-isolated, 0V)
4	STO2+	I	Safe Torque Off input 2, positive PWM output operation input (opto-isolated, 18±40V)

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24$ VDC; $V_{MOT} = 48$ VDC; $F_{PWM} = 20$ kHz
- Ambient temperature = 25°C (typical values) / 0°C...40°C (min/max values)
- Supplies start-up / shutdown sequence: -any-
- Load current = nominal

Operating Conditions	Min.	Typ.	Max.	Units
Ambient temperature	0		40 ^{1, 2}	°C
Ambient humidity	0		90	%Rh
Altitude / pressure ³	-0.1	0 + 2.5	³	Km
Ambient Pressure	0 ²	0.75 + 1	10.0	atm
Storage Conditions	Min.	Typ.	Max.	Units
Ambient temperature	-40		100	°C
Ambient humidity	0		100	%Rh
Ambient Pressure	0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part		±5	kV
Original packaging			±15	kV

spacing requirements can be dropped down to zero; c) the surface temperature will decrease accordingly

³ Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

Name First edition Document template: P099.TQT.564.0001

Last edition Visa:
ALN July 17, 2024 March 12, 2025





Micro 4804 PZ-CAN-STO DATASHEET

P/N: P020.003.E302

Mechanical Mounting		Min	Typ	Max	Units
Airflow		natural convection ¹ , closed box			
Spacing required for horizontal mounting ¹		Between adjacent drives	10	mm	
Between drives and nearby walls		10	mm		
Space needed for drive removal		20	mm		
Between drives and roof-top		30	mm		
Insertion force		Using recommended mating connectors		40	N
Extraction force		8		N	
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)		Global size	38.3 x 26.8 x 11.3	mm	
			~1.5 x 1.1 x 0.45	inch	
Weight			26	g	
Cleaning agents		Dry cleaning is recommended	Only Water- or Alcohol-based		
Protection degree		According to IEC60529	IP20	-	
Power dissipation		Idle ($I_{MOT} = 0A$)	1	1.2	W
		Full power ($I_{MOT} = \text{nominal}$)	2.0	2.4	
Power efficiency		Full power ($I_{MOT} = \text{nominal}$)	98.7		%
Voltage efficiency		$f_{PWM} = 20\text{KHz}$	98.3		
		$f_{PWM} = 100\text{KHz}$	91.4		
Surface temperature ¹		Idle ($I_{MOT} = 0A$)	55		°C
		Full power ($I_{MOT} = \text{nominal}$)	100		
Logic Supply Input (+V _{LOG})		Min	Typ.	Max.	Units
Supply voltage		Nominal values	6	24	V _{DC}
		Absolute maximum values, drive operating but outside guaranteed parameters	4.9	60	V _{DC}
		Absolute maximum values, continuous	-0.5	63	V _{DC}
Supply current	+V _{LOG} = 12V		90	150	mA
	+V _{LOG} = 24V		60	90	
	+V _{LOG} = 48V		45	60	
Utilization category Acc. to 60947-4-1 ($I_{PEAK} \leq 1.05 * I_{NOM}$)		DC-1			
Motor Supply Input (+V _{MOT})		Min	Typ.	Max.	Units
Supply voltage		Nominal values	7	48	V _{DC}
		Absolute maximum values, drive operating but outside guaranteed parameters	6	60	V _{DC}
		Absolute maximum values, continuous	-0.5	63	V _{DC}
Supply current	Idle		0.3		mA
	Operating	-16	±7	+16	A
	Voltage measurement error		±0.15	±0.25	V
Utilization category Acc. to 60947-4-1 ($I_{PEAK} \leq 4.0 * I_{NOM}$)		DC-3			
Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage		Current sourced = 400mA	5.05	5.2	5.25 V
Output current		Output voltage ≥ 4.85V		1,200	mA
Short-circuit to GND protection		Yes / Drive resets at event			
Over-voltage protection		NOT protected			
ESD protection Human body model		±1			kV
Motor Outputs (A/A+, B/A-, C/B+, CR/B-)		Min.	Typ.	Max.	Units
Nominal current ²	PMPSM motors sinusoidal amplitude			±8	A
	PMPSM motors sinusoidal RMS			5.7	A _{RMS}
	DC/BLDC/STEP motors continuous			7	A
Peak current	maximum 4 seconds	-16		+16	A
Short-circuit protection threshold			±25	±28	A
Short-circuit protection delay		2.6		3.5	μs
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		50	70	mV
Off-state leakage current		0.3	1		mA
Current measurement	Accuracy (FS = Full Scale)	±1	±1.5		%FS
	Noise (current ≤ 2A)	±4	±6		mA
	Noise (current ≥ 2A)	±30	±50		mA
	Offset drift (compensated @ AxisOn)		±0.16		mA/°C
Motor inductance (phase-to-phase)	Recommended value to avoid spurious short-circuit protection, triggered by ripple	Fast loop ³ V _{MOT}			μH
	50μs	48V	133		
	100μs	48V	266		
	50μs	24V	66		
	100μs	24V	133		
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	F _{PWM} = 20 kHz	330		μs
		F _{PWM} = 40 kHz	170		
		F _{PWM} = 60 kHz	140		
		F _{PWM} = 80 kHz	80		
		F _{PWM} = 100 kHz	66		

Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V			
Input voltage	Default state	Input floating (Wiring disconnected)	4.5	4.8	5.2
		Logic "LOW"		1.5	1.7
		Logic "HIGH"	3	2.5	
		Hysteresis		0.5	
		Analog	0	0.5..4.5	4.95
Input current	Logic "LOW"; Pull to GND		2.4		
	Logic "HIGH"; Internal 2.2kΩ pull-up to +5		0		
	Minimum pulse width		66		μs
	ESD protection - Human body model		±15		kV
	Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5)	Min.	Typ.	Max.	Units
Input voltage	Mode compliance	NPN (sink)			
	Default state	Input floating (wiring disconnected)	Logic HIGH		
		Logic "LOW"		1.4	1.8
		Logic "HIGH"	IN0, IN1, IN4, IN5	3.1	2.5
		Hysteresis		0.9	1.1
		Logic "LOW"	IN2/LSP, IN3/LSN	4	1.4
		Logic "HIGH"		0.6	1.6
		Hysteresis			
		Floating voltage (not connected)		4.7	
		Absolute maximum, continuous	IN2/LSP, IN3/LSN, IN5	-2	+80
Input current	Absolute maximum, continuous	IN0, IN1, IN4	-0.5		V _{LOG} +0.5
	Input current	Logic "LOW"; Pulled to GND		6.5	8
		Logic "HIGH"; Pulled to +24V		0.2	0.4
	Input frequency		0		kHz
	Minimum pulse		1		μs
ESD protection - Human body model			±2		kV
Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink) 24V			
Load type		Resistive, Inductive			
Output voltage	Default state	Not supplied (+V _{LOG} floating)	High-Z (floating)		
		Immediately after power-up	Logic "HIGH"		
Output current	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4			0.4	mA
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}				
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
	Absolute maximum, surge (duration ≤ 1s) [†]	-1		V _{LOG} +1	
Analog Input (REF/ FDBK)	Logic "LOW", sink current, short duration, duty cycle ≤=1%	5s max	OUT1, OUT4		0.1
		OUT0			2
	0.5s max	OUT1, OUT4		0.15	A
		OUT0		2.5	
	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V	OUT1, OUT4		0.05	
		OUT0		1.5	
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V			5	mA
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	
		V _{LOG} =48V	0.42	0.45	
	Minimum pulse width		0.5		μs
ESD protection - Human body model			±25		kV
Analog Input (REF/ FDBK)		Min	Typ.	Max	Units
Input voltage	Operational range	0...5, -10...+10			
	Absolute maximum values, continuous	-22		+26	V
	Absolute maximum, surge (duration ≤ 1s)			±38	
	Input impedance	To 1.44V		20	
Bandwidth (-3dB)		Software selectable	0	5.3	kHz
Resolution			12		bits
Integral linearity				±1	bits
Offset error		Range -10V ... +10V	±3	±10	bits
		Range 0 ... +5V	±10	±30	
Gain error		Range -10V ... +10V	±0.3	±0.5	%
		Range 0 ... +5V	±0.5	±0.8	
ESD protection		Human body model	±1.5		kV

¹ In case of forced cooling (conduction or ventilation): a) the ambient temperature requirements may be extended substantially as long as the drive (PCB) temperature is kept below 85 °C; b) the spacing requirements can be dropped down to zero; c) the surface temperature will decrease accordingly

² For current values >4A_{RMS}, pins J1/2...8 may need to be soldered instead of socketed, for long-term reliability – check socket manufacturer specifications.

³ Fast loop period of 50μs is not possible with all feedback device types.

Name ALN	First edition July 17, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
Title of document		Nº document P020.003.E302.DSH.10D		Page: 3 of 5



Micro 4804 PZ-CAN-STO
DATASHEET
P/N: P020.003.E302

Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-)¹		Min.	Typ.	Max	Units	
Single-ended mode compliance	Leave A1-, B1-, Z1-, A2-, B2-flooding	TTL / CMOS / Open-collector (NPN sink)				
Single-ended threshold	A1+, B1+, Z1+, A2+, B2+	1.3	1.4	1.5	V	
Single-ended input current	Input pulled to GND against on-board 2.2 kΩ pull-up to +5V		2.4	2.7	mA	
Differential mode compliance	For full RS422 compliance, see¹	TIA/EIA-422-A				
Input voltage	Hysteresis	±0.03	±0.05	±0.2	V	
	Differential mode	-15		+15		
	Common-mode range (A+ to GND, etc.)	-7		+12		
Input impedance, differential	Common-mode (A1+ to GND, etc.)	2.2			kΩ	
	Differential (A1+ to A1-, etc.)	4.4				
Input frequency	Differential mode	0		15	MHz	
Minimum pulse width	Differential mode	33			ns	
ESD protection	Human body model	±30			kV	
Absolute encoder interface: SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki		Min	Typ.	Max	Units	
Single-ended mode	Not recommended, reduced robustness & speed					
Differential mode compliance	For full RS422 compliance, see¹	TIA/EIA-422-A				
Output voltage	Differential; 50Ω differential load	1.5	3.3		V	
	Common-mode, referenced to GND	1	1.7	3		
CLOCK frequency	Nikon, Sanyo Denki	2.5, 4		MHz		
	Panasonic, Tamagawa	2.5				
	All others	1, 2, 3, 4				
Output Short-circuit protection	Common-mode voltage ±15V	Yes, protected				
DATA format	Software selectable	Binary / Gray				
		Single-turn / Multi-turn				
		Counting direction				
DATA resolution	Including CRC, flags, ...		64	Bits		
		If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution				
RS-232		Min.	Typ.	Max.	Units	
Compliance		TIA/EIA-232-C				
Bit rate	Software selectable	9600		115200	Baud	
Output voltage		±5	±5.7		V	
Short-circuit	232TX to GND	Guaranteed				
Input voltage	Absolute maximum, continuous	-30		+30	V	
ESD protection	Human body model	±15			kV	

CAN-Bus		Min.	Typ.	Max.	Units
Compliance		CAN 2.0B, ISO 11898-2			
Software protocols compatibility		CiA301, CiA305, CiA402, TechnoCAN, TMLcan			
Bit rate	Software selectable	125, 250, 500, 1000			Kbaud
Node addressing	TMLcan CANopen		1 ÷ 255		-
Voltage	Common-mode, operating	-12		+12	V
	Common-mode, max. continuous	-58		+58	V
	Differential, max. continuous	-45		+45	V
Input impedance	Differential	40		90	kΩ
	Common-mode	20		45	kΩ
Termination resistor (120Ω)		NOT included			
ESD protection	Human body model	±10			kV
AxisID inputs		Min.	Typ.	Max.	Units
Default state	ID1, ID1, ID2 floating	Configured Station Alias = 0, AxisID=255			
Internal pull-down to GND		95	100	105	kΩ
ESD protection	Human body model	±250			V
LED outputs		Min.	Typ.	Max.	Units
Polarity	Active high (high=LED lit)				
	Common cathode to GND				
Voltage	I _{OH} ≤ 0.9mA	2.9	3.3		V
	I _{OH} ≤ 1.5mA	2.4			V
	I _{OL} ≤ 2.0mA	0	0.4		V
Current	Abs. max., continuous	-0.5		3.8	V
	Sink (I _{OL}) current larger than source (I _{OH}) current	-2.0		+1.5	mA
Short-circuit protection		NOT protected			
ESD protection	Human body model	±250			V
BFS input		Min.	Typ.	Max.	Units
Polarity	Active Low (0=fail-safe boot, 1=normal)				
	High				
Default state	BFS floating				
	Logic low (active)	0	1.1		V
Voltage	Logic high (inactive)	2.0	3.3		V
	Abs. max., continuous	-0.5		3.8	V
Current	Logic low (2.2kΩ pull to +3.3V)		1.5	1.6	mA
	Logic high		0		mA
ESD protection	Human body model	±250			V
Safe Torque Off (STO) Inputs		Min.	Typ.	Max.	Units
Safety Integrity Level		SIL 3			
Performance Level		PL e			
Safety Category		Cat 3			
Reaction time			30		ms
Ignored diagnostic pulses	Duration		5		ms
	Repetition rate		20		Hz
MTTFd			377		years
DC			90		%
PFH			8E-10		hours
Lifetime			20		years
V _{LOG}	External power supply	SELV or PELV			
Pollution Degree	Cabinet / Housing		2		-
	Bundling / Grouping	IP54			-
STO wiring		Separate wiring for STO1, STO2			
Shielding		Separate shield for STO1, STO2			
Compatibility		Each STO channels has separate + and - terminals			PNP (source) or NPN (sink), depending on user connection
Isolation		Each STO channel is opto-isolated			
Voltage, STOx+ to STOx-	Inactive (torque off)		0	5.6	V
	Active (motor driven)	18	24		V
	Abs. maximum, continuous	-70		+70	V
Voltage	Isolation, STO1 to STO2	±2			KV
	Isolation, STOx to GND	±2			KV
Current	STOx+ - STOx- = 24V		3	5	mA
ESD protection	Human body model	±30			kV


† Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ Full RS-422 compatibility, as well as noise rejection improvement requires an external 120Ω resistor connected across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-)


Name ALN	First edition July 17, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
 TECHNOSOFT	Title of document	Micro 4804 PZ-CAN-STO PRODUCT DATA SHEET	N° document P020.003.E302.DSH.10D	Page: 4 of 5




Micro 4804 PZ

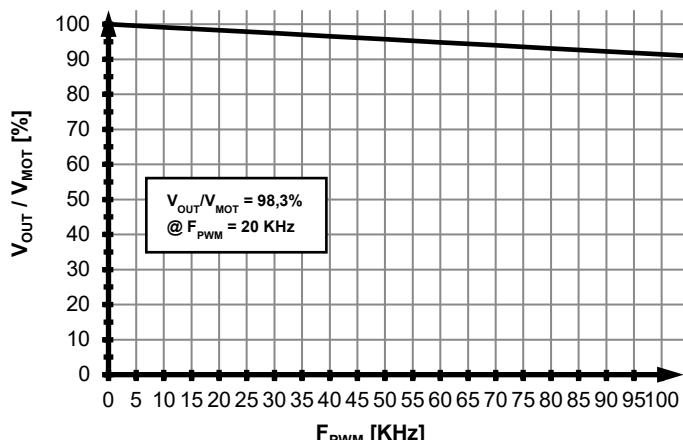


Micro 4804 PZ

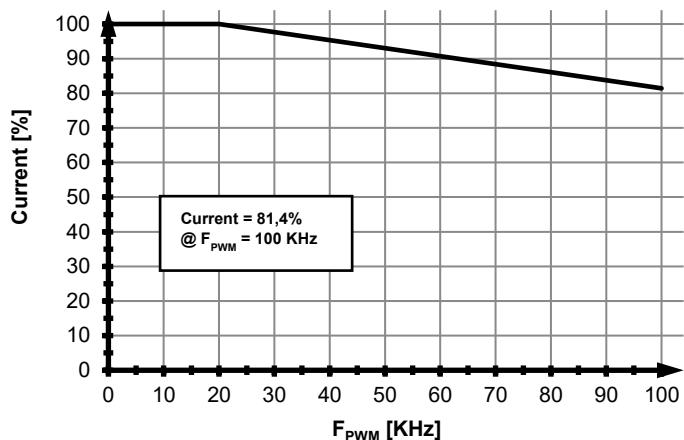


Micro 4804 PZ

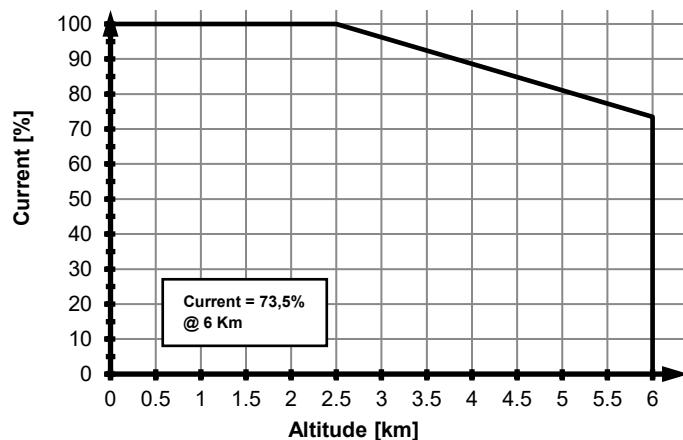

Micro 4804 PZ

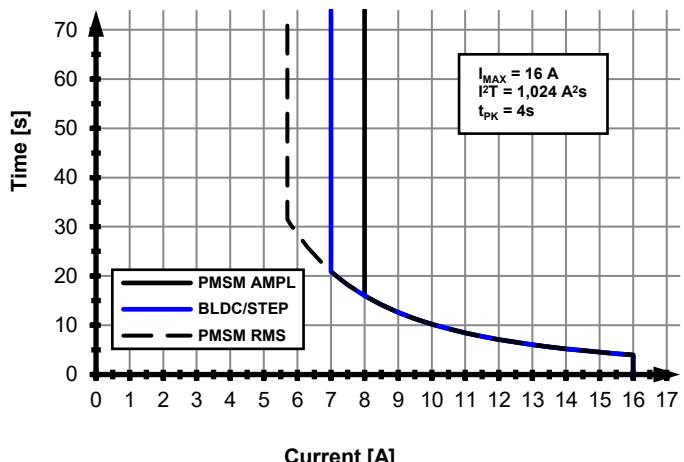

Micro 4804 PZ

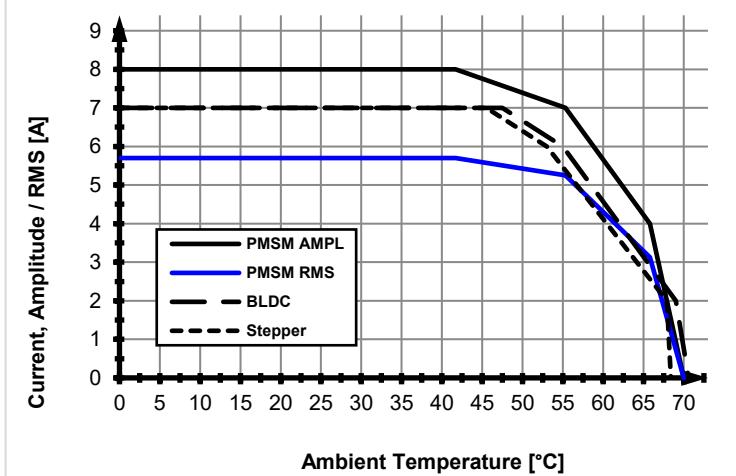

Name ALN	First edition July 17, 2024	Document template: P099.TQT.564.0001	Last edition March 12, 2025	Visa:
TECHNOSOFT	Title of document	Micro 4804 PZ-CAN-STO PRODUCT DATA SHEET	Nº document P020.003.E302.DSH.10D	Page: 5 of 5