


Micro 4804 SX3-CAN-STO Multi Axis System

DATASHEET

P/N: P020.103.E403

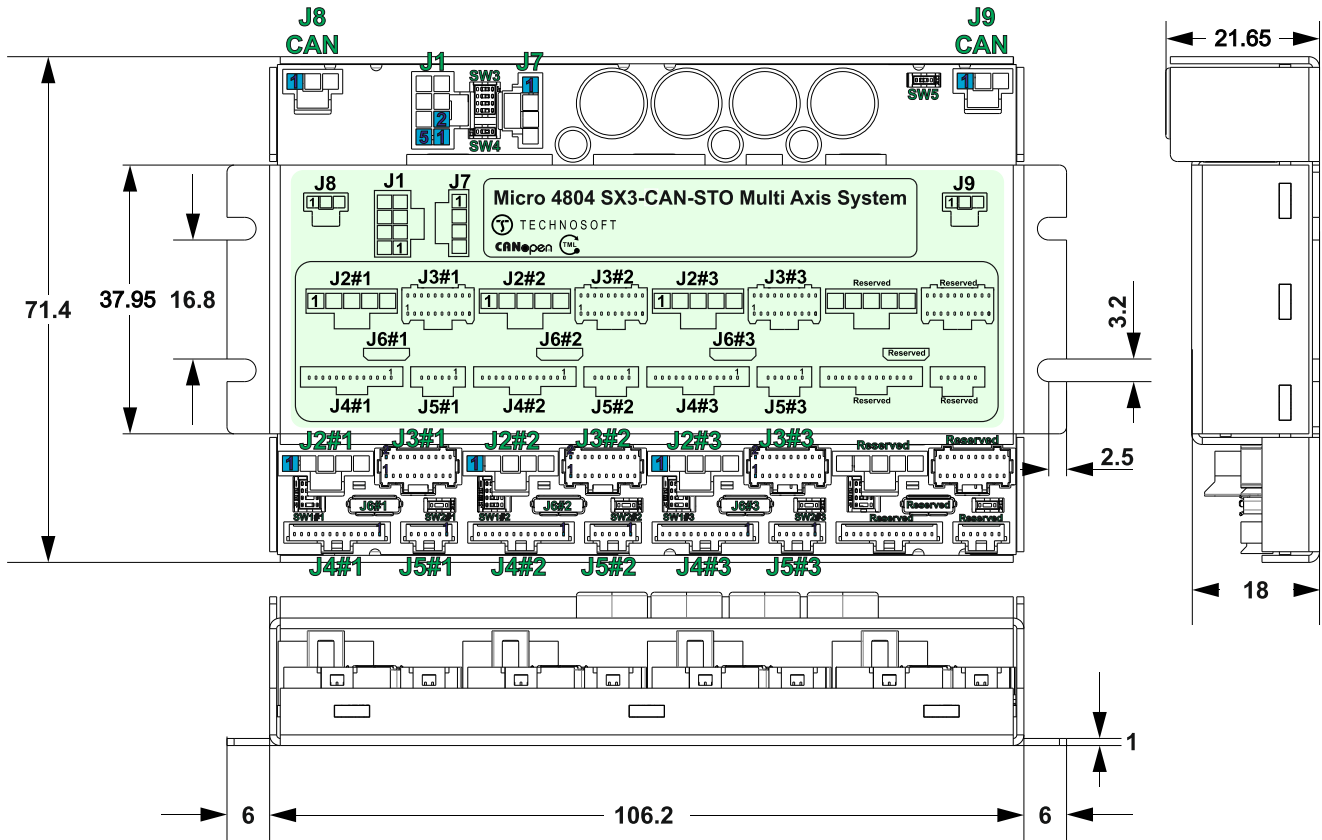

All dimensions are in mm. Drawing not to scale.

Motor – sensor configurations


Sensor	Motor				
	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	Ⓢ		Ⓢ	Ⓢ	
Incr. Encoder + Dig. Hall	Ⓢ	Ⓢ			
Linear Halls	Ⓢ				
Digital Hall control only	Ⓢ				
BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic	Ⓢ	Ⓢ	Ⓢ	Ⓢ	
Tacho			Ⓢ		
Open-loop (no sensor)				Ⓢ	Ⓢ

Features

- Compact 3-axis CAN motion system that integrates a motion controller and drive into a single unit, powered by MotionChip™ technology.
- Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
- Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
- Motor supply: 48V nominal
- Motor output current per axis:
 - Nominal: 5.7A_{RMS} / 8A amplitude for PMSM motors
 - 7A for DC / BLDC / Step motors
 - Peak: 11.3A_{RMS} / 16A amplitude
- Logic supply: 24V nominal, 48V max

- Feedback Devices per axis:
 - 1 x Hall sensor interface (digital or linear)
 - Feedback#1 and Feedback#2 can be:
 - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
 - Absolute encoder: differential or single-ended. Supported protocols: SSI, BiSS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- Integrated termination resistors for each axis's feedback connectors, selectable via sliding switches
- 1 x analogue input per axis, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs per axis: 2 for limit switches + one general-purpose, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os per axis, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 0.1A.
- Communication interfaces: RS232; USB; TMLCAN and CANopen (CiA 301 v4.2, CiA 305 v.2.2.13 and CiA 402 v3.0) protocols
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/ EN61508-3; -4/ EN ISO 13849-1.
- 24Kwords E²ROM per axis to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory per axis for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t drive & motor, control error
- >98% voltage efficiency, >98% power efficiency

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
		Title of document Micro 4804 SX3-CAN-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.103.E403.DSH.10C	Page: 1 of 5



Micro 4804 SX3-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E403

Mating Connectors				
Producer	Part No.	Connector	Description	
Molex	1053071203	J8, J9	1x3 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 3 circuits	
Molex	1053071204	J7	1x4 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 4 circuits	
Molex	1053071205	J2#x ¹	1x5 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 5 circuits	
Molex	5011892010	J3#x ¹	2x10 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 20 Circuits	
Molex	5013301300	J4#x ¹	1x13 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 13 Circuits	
Molex	5013300600	J5#x ¹	1x6 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 6 Circuits	
Molex	1053081208	J1	Nano-Fit Receptacle Housing, TPA Capable, 2.5mm Pitch, Dual Row, 8 Circuits, Black, Glow-Wire Capable	
Tensility International Corp	1002333	J1, J7, J8, J9, J2#x ¹	USB cable, Cable USB A Male - Micro B Male, 1m, shielded, black, 9.6mm plastic width	
Molex	0797582140	J1, J7, J8, J9, J2#x ¹	Pre-Crimped wires for Nano-Fit	Cable Assembly, Nano-Fit Crimp Terminal Socket to Nano-Fit Crimp Terminal Socket, 300mm
Molex	0797581019	J3#x ¹ , J4#x ¹ , J5#x ¹	Pre-Crimped wires for Pico-Clasp	Cable Assembly, Pico-Clasp Crimp Terminal Socket to Pico-Clasp Crimp Terminal Socket, 300mm
Molex	1053001400	J1, J7, J8, J9, J2#x ¹	Pins for Nano-Fit	Nano-Fit Crimp Terminal, Female, 0.76µm Gold (Au) Plating, Lubricated, 24-26 AWG
Molex	5011937000	J3#x ¹ , J4#x ¹ , J5#x ¹	Pins for Pico-Clasp	1.00mm Pitch, Pico-Clasp Female Crimp Terminal, Gold Plating 0.10µm, 28-32 AWG, Reel
Molex	638276000	J1, J7, J8, J9, J2#x ¹	Crimp tool Nano Fit	Crimp Tool, Ratchet, Molex Nano-Fit 105300 Series 26-24AWG Socket Contacts, 207129 Series
Molex	638191500	J3#x ¹ , J4#x ¹ , J5#x ¹	Crimp tool Pico-Clasp	Crimp Tool, Ratchet, Molex Pico-Clasp 501193 & 501334 Series 32-28AWG Contacts

Pin	Name	Type	Description
J1	1,2,3	+Vmot	I Positive terminal of the motor supply: 7 to 48 V _{DC} . Internally connected to all 3 drives +V _{mot} pins.
	4	PE	- Earth connection.
	5,6,7	GND	- Ground return. Internally connected to other GND pins.
	8	PE	- Earth connection

Pin	Name	Type	Description
J2#x ¹	1	A/A+	O Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
	2	B/A-	O Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
	3	C/B+	O Phase C for 3-ph motors, B+ for 2-ph steppers
	4	Cr/B-	O Chopping resistor / Phase B- for 2-ph steppers
	5	PE	- Earth connection for motor cable shielding

Pin	Name	Type	Description
J4#x ¹	1	232TX	O RS-232 Data Transmission.
	2	232RX	I RS-232 Data Reception.
	3	GND	- Ground return.
	4	+Vlog	I Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.
	5	IN2/LSP	I 5-48V digital NPN input. Positive limit switch input.
	6	IN3/LSN	I 5-48V digital NPN input. Negative limit switch input.
	7	I/O0	I/O 5-48V 1.5A NPN (sink) general-purpose digital programmable input IN0 or output OUT0
	8	I/O1	I/O 5-48V 0.1A NPN (sink) general-purpose digital programmable input IN1 or output OUT1
	9	I/O4	I/O 5-48V 0.1A NPN (sink) general-purpose digital programmable input IN4 or output OUT4
	10	IN5	I 5-48V digital general-purpose NPN input
	11	GND	- Ground return. Internally connected to other GND pins.
	12	AnalogIn	I Analog input (range software selectable 0-5V or ±10V)
	13	+5V	O Supply for all feedback sensors.

Pin	Name	Type	Description
J3#x ¹	1	GND	- Ground return. Internally connected to other GND pins.
	2	Hall1	I Digital Hall, or Linear Hall sensor 1.
	3	+5V	O 5V supply for all feedback sensors.
	4	Hall2	I Digital Hall, or Linear Hall sensor 2.
	5	+5V	O 5V supply for all feedback sensors.
	6	Hall3	I Digital Hall, or Linear Hall sensor 3.
	7	EncA1+/EncA1Dt1+/Dt1	I Encoder 1 A+ / Data+ diff. input or single-ended input. Set SW1 pin 1 for differential.
	8	GND	- Ground return.
	9	EncA1-/Dt1-	I Encoder 1 A-/Data- diff. input. Set SW1 pin 1 for differential.
	10	+5V	O 5V supply for all feedback sensors.
	11	EncB1+/EncB1Clk1+/Clk1	I Encoder 1 B+ / Clock+ diff. input or single-ended input. Set SW1 pin 2 for differential.
	12	EncA2+/EncA2Dt2+/Dt2	I Incr. encoder 2 A / Data+ diff. input or single-ended input. Set SW1 pin 4 for differential.
	13	EncB1-/Clk1-	I Encoder 1 B- / Clock- diff. input. Set SW1 pin 2 for differential.
	14	EncA2-/Dt2-	I Incr. encoder 2 A- / Data - diff. input. Set SW1 pin 4 for differential.
	15	Z / Z1+	I Incr. encoder 1 Z / Z+ diff. input or single-ended input. Set SW1 pin 3 for differential.
	16	EncB2+/EncB2Clk2+/Clk2	I/O Encoder 2 B+ / Clock+ diff. input or single-ended input. Set SW2 pin1 for differential.
	17	Z1-	I Incr. encoder 1 Z- diff. input. Set SW1 pin 3 for differential.
	18	EncB2-/Clk2-	I Encoder 2 B- / Clock- diff. input. Set SW2 pin1 for differential.
	19	GND	- Ground return.
	20	+Vlog	I Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.

Pin	Name	Type	Description
J8, J9	1	GND	- Ground return.
	2	Can Lo	I/O CAN-Bus negative line (dominant low)
	3	Can Hi	I/O CAN-Bus positive line (dominant high)

Port	Name	Type	Description
J6#x ¹	USB	I/O	Standard Micro USB for PC data transfer

Pin	Name	Type	Description
J5#x ¹	1	STO2-	I Safe Torque Off input 2, negative return (opto-isolated, 0V) Apply between both STO1+, STO2+ and STO1-, STO2- 24V DC from SELV/ PELV
	2	STO2+	I Safe Torque Off input 2, positive input (opto-isolated, 18+40V) power supply for motor PWM output operation
	3	PE	- Earth connection
	4		
	5	STO1+	I Safe Torque Off input 1, positive input (opto-isolated, 18+40V) Apply between both STO1+, STO2+ and STO1-, STO2- 24V DC from SELV/ PELV
	6	STO1-	I Safe Torque Off input 1, negative return (opto-isolated, 0V) power supply for motor PWM output operation


Pin	Name	Type	Description
J7	1	Rsvd	- Reserved. Do not connect.
	2	GND	- Ground return. Internally connected to other GND pins.
	3	+Vlog	I Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to all 3 drives +V _{log} pins.
	4	PE	- Earth connection

SW1#x ¹ – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncA1-/Dt1- and EncA1+/EncA1Dt1+/Dt1 feedback pins.
2	ON = Connect an 120Ω resistor between EncB1/Clk1- and EncB1+/EncB1Clk1+/Clk1 feedback pins.
3	ON = Connect an 120Ω resistor between Z1- and Z1+ feedback pins.
4	ON = Connect an 120Ω resistor between EncA2-/Dt2- and EncA2+/EncA2Dt2+/Dt2 feedback pins.

SW2#x ¹ – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncB2/Clk2- and EncB2+/EncB2Clk2+/Clk2 feedback pins.

¹ "x" can be drive 1, 2 or 3

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
		Title of document Micro 4804 SX3-CAN-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.103.E403.DSH.10C	
			Page: 2 of 5	



Micro 4804 SX3-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E403

SW5 – CAN Resistors selection						
1	ON = Connect an 120Ω resistor between CAN Hi and CAN Lo signals.					
SW4 – Protocol selection						
1	OFF – CANOpen mode					
	ON – TMLCAN mode					
SW3 - AxisID selection						
SW3				Drive AxisID		
Pin 1	Pin 2	Pin 3	Pin 4	Drive #1	Drive #2	Drive #3
off	off	off	off	1	2	3
off	off	off	on	9	10	11
off	off	on	off	17	18	19
off	off	on	on	25	26	27
off	on	off	off	33	34	35
off	on	off	on	41	42	43
off	on	on	off	49	50	51
off	on	on	on	57	58	59
on	off	off	off	65	66	67
on	off	off	on	73	74	75
on	off	on	off	81	82	83
on	off	on	on	89	90	91
on	on	off	off	97	98	99
on	on	off	on	105	106	107
on	on	on	off	113	114	115
on	on	on	on	121	122	123

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24$ VDC; $V_{MOT} = 48$ VDC; $F_{PWM} = 20$ kHz
- Ambient temperature = 25°C (typical values) / 0°C...40°C (min/max values)
- Supplies start-up / shutdown sequence: -any-
- Load current = nominal
- Data is provided for each axis of the system


Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature		0		40 ¹	°C
Ambient humidity	Non-condensing	0		90	%Rh
Altitude / pressure ²	Altitude (vs. sea level)	-0.1	0 ± 2.5	2	Km
	Ambient Pressure	0	0.75 ± 1	10.0	atm
Storage Conditions		Min.	Typ.	Max.	Units
Ambient temperature		-40		100	°C
Ambient humidity	Non-condensing	0		100	%Rh
Ambient Pressure		0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part			±5	kV
	Original packaging			±15	kV
Mechanical Mounting		Min	Typ	Max	Units
Airflow	natural convection, closed box				
Spacing required between adjacent drives		10			mm
Spacing required above drive	For counter-connectors & cable bending	30	80		
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)	Global size	118.2 x 71.4 x 21.7			mm
		~4.65 x 2.81 x 0.85			inch
Weight		152			g
Cleaning agents	Dry cleaning is recommended	Only Water- or Alcohol-based			
Protection degree	According to IEC60529	IP20			
Power dissipation	Idle ($I_{MOT} = 0A$)		1	1.2	W
	Full power ($I_{MOT} = nominal$)		2.0	2.4	
Power efficiency	Full power ($I_{MOT} = nominal$)		98.7		%
Voltage efficiency	$f_{PWM} = 20KHz$		98.3		
		$f_{PWM} = 100KHz$		91.4	
Surface temperature of metallic baseplate		40			°C
Logic Supply Input (+V _{LOG})		Min	Typ.	Max.	Units
Supply voltage	Nominal values	6	24	48	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	4.9		50	V _{DC}
	Absolute maximum values, continuous	-0.5		53	V _{DC}
Supply current	+V _{LOG} = 12V		90	150	mA
	+V _{LOG} = 24V		60	90	
	+V _{LOG} = 48V		45	60	
Utilization category	Acc. to 60947-4-1($I_{PEAK} \leq 1.05 \cdot I_{NOM}$)	DC-1			

Motor Supply Input (+V _{MOT})		Min	Typ.	Max.	Units
Supply voltage	Nominal values	7		48	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	6		50	V _{DC}
	Absolute maximum values, continuous	-0.5		53	V _{DC}
Supply current	Idle		0.3		mA
	Operating	-16	±7	±16	A
Voltage measurement error			±0.15	±0.25	V
Utilization category	Acc. to 60947-4-1 ($I_{PEAK} \leq 4.0 \cdot I_{NOM}$)	DC-3			
Motor Outputs (A/A+, B/A-, C/B+, CR/B-)		Min.	Typ.	Max.	Units
Nominal current	PMSM motors sinusoidal amplitude			±8	A
	PMSM motors sinusoidal RMS			5.7	A _{RMS}
	DC/BLDC/STEP motors continuous			7	A
Peak current	maximum 4 seconds	-16		+16	A
Short-circuit protection threshold			±25	±28	A
Short-circuit protection delay		2.6		3.5	µs
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		50	70	V
Off-state leakage current			0.3	1	mA
Current measurement	Accuracy (FS = Full Scale)		±1	±1.5	%FS
	Noise (current ≤ 2A)		±4	±6	mA
	Noise (current ≥ 2A)		±30	±50	
	Offset drift (compensated @ AxisOn)			±0.16	mA/°C
Motor inductance (phase-to-phase)	Recommended value to avoid spurious short-circuit protection, triggered by ripple	Fast loop ³ V _{MOT}			µH
		50µs 48V		133	
		100µs 48V		266	
		50µs 24V		66	
	100µs 24V			133	
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	F _{PWM} = 20 kHz		330	µs
		F _{PWM} = 40 kHz		170	
		F _{PWM} = 60 kHz		140	
		F _{PWM} = 80 kHz		80	
		F _{PWM} = 100 kHz		66	
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink)			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		1.4	1.8	V
	Logic "HIGH"	IN0, IN1, IN4, IN5	3.1	2.5	
	Hysteresis		0.9	1.1	
	Logic "LOW"			1.4	
	Logic "HIGH"	IN2/LSP, IN3/LSN	4	3.5	
	Hysteresis			0.6	
	Floating voltage (not connected)			4.7	
Input current	Absolute maximum, continuous	IN2/LSP, IN3/LSN, IN5	-2	+80	
		IN0, IN1, IN4	-0.5	V _{LOG} +0.5	
Input frequency	Logic "LOW"; Pulled to GND		6.5	8	mA
	Logic "HIGH"; Pulled to +24V		0.2	0.4	
Input frequency		0		500	kHz
Minimum pulse		1			µs
ESD protection - Human body model		±2			kV
Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink) 24V			
Load type		Resistive, Inductive			
Default state	Not supplied (+V _{LOG} floating)	High-Z (floating)			
	Immediately after power-up	Logic "HIGH"			
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4			0.4	V
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
	Absolute maximum, surge (duration ≤ 1s) [†]	-1		V _{LOG} +1	
Output current	Logic "LOW", sink current, short duration, duty cycle ≤ 1%	5s max		0.1	A
		0.5s max	OUT1, OUT4	2	
			OUT1, OUT4	0.15	
	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V		OUT1, OUT4	0.05	
			OUT0	1.5	
			OUT0	1.5	
Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V			5	mA	
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	mA
	V _{LOG} =48V	0.42	0.45		
Minimum pulse width		0.5			µs
ESD protection - Human body model		±25			kV

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings
² Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ Fast loop period of 50µs is not possible with all feedback device types.

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
TECHNO SOFT		Title of document Micro 4804 SX3-CAN-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.103.E403.DSH.10C	Page: 3 of 5



Micro 4804 SX3-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E403

Supply Output (+5V)		Min.	Typ.	Max.	Units	
Output voltage	Current sourced = 400mA ¹	5.05	5.2	5.25	V	
Output current ¹	Output voltage ≥ 4.85V			1,200	mA	
Short-circuit to GND protection		Yes / Drive resets at event				
Over-voltage protection		NOT protected				
ESD protection - Human body model		±1			KV	
Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units	
Mode compliance		TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V				
Default state	Input floating (Wiring disconnected)	4.5	4.8	5.2		
Input voltage	Digital	Logic "LOW"	1.5	1.7	V	
		Logic "HIGH"	3	2.5		
	Hysteresis		0.5			
	Analog	0	0.5...4.5	4.95		
Input current	Logic "LOW"; Pull to GND		2.4		mA	
	Logic "HIGH"; Internal 2.2KΩ pull-up to +5		0			
Minimum pulse width			66		μs	
ESD protection - Human body model			±15		kV	
Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-) ²		Min.	Typ.	Max.	Units	
Single-ended mode compliance		TTL / CMOS / Open-collector (NPN sink)				
Single-ended threshold		A1+, B1+, Z1+, A2+, B2+	1.3	1.4	1.5	V
Single-ended input current		Input pulled to GND against on-board 2.2 KΩ pull-up to +5V		2.4	2.7	mA
Differential mode compliance		For full RS422 compliance, see ¹ TIA/EIA-422-A				
Input voltage	Hysteresis	±0.03	±0.05	±0.2	V	
	Differential mode	-15		+15		
	Common-mode range (A+ to GND, etc.)	-7		+12		
Input impedance, differential	Common-mode (A1+ to GND, etc.)		2.2		kΩ	
	Differential (A1+ to A1-, etc.)		4.4			
Input frequency		Differential mode	0	15	MHz	
Minimum pulse width		Differential mode	33		ns	
ESD protection		Human body model	±30		kV	
RS-232		Min.	Typ.	Max.	Units	
Compliance		TIA/EIA-232-C				
Bit rate		Software selectable	9600	115200	Baud	
Output voltage			±5	±5.7	V	
Short-circuit		232TX to GND	Guaranteed			
Input voltage		Absolute maximum, continuous	-30		+30	V
ESD protection		Human body model	±15		kV	
Absolute encoder interface:						
SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki		Min	Typ.	Max	Units	
Single-ended mode		Not recommended, reduced robustness & speed				
Differential mode compliance		For full RS422 compliance, see ² TIA/EIA-422-A				
Output voltage	Differential; 50Ω differential load	1.5	3.3		V	
	Common-mode, referenced to GND	1	1.7	3		
CLOCK frequency	Nikon, Sanyo Denki	2.5, 4		MHz		
	Panasonic, Tamagawa	2.5				
	All others	1, 2, 3, 4				
Output Short-circuit protection		Common-mode voltage ±15V		Yes, protected		
DATA format	Software selectable	Binary / Gray				
		Single-turn / Multi-turn				
		Counting direction				
		CRC type				
DATA resolution	Including CRC, flags, ...			64	Bits	
	If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution					







Analog Input (REF/ FDBK)		Min	Typ.	Max	Units	
Input voltage	Operational range	0...5, -10...+10				
	Absolute maximum values, continuous	-22		+26	V	
	Absolute maximum, surge (duration ≤ 1s)			±38		
Input impedance	To 1.44V					
Bandwidth (-3dB)	Software selectable	0		5.3	kHz	
Resolution		12				
Integral linearity				±1	bits	
Offset error	Range -10V ... +10V		±3	±10	bits	
	Range 0 ... +5V		±10	±30		
Gain error	Range -10V ... +10V		±0.3	±0.5	%	
	Range 0 ... +5V		±0.5	±0.8		
ESD protection		Human body model	±1.5		kV	
CAN-Bus		Min.	Typ.	Max.	Units	
Compliance		CAN 2.0B, ISO 11898-2				
Software protocols compatibility		CiA301, CiA305, CiA402, TechnoCAN, TMLcan				
Bit rate		Software selectable			125, 250, 500, 1000	KBaud
Node addressing	TMLcan	SW3 selectable		1+123		
	CANopen					
Voltage	Common-mode, operating	-12		+12	V	
	Common-mode, max. continuous	-58		+58	V	
	Differential, max. continuous	-45		+45	V	
Input impedance	Differential	40		90	KΩ	
	Common-mode	20		45	KΩ	
Termination resistor (120Ω)		Included – SW5				
ESD protection		Human body model	±10		kV	
Safe Torque Off (STO) Inputs		Min.	Typ.	Max.	Units	
Safety Integrity Level		SIL 3				
Performance Level		PL e				
Safety Category		Cat 3				
Reaction time				30	ms	
Ignored diagnostic pulses	Duration			5	ms	
	Repetition rate			20	Hz	
MTTFd				377	years	
DC				90	%	
PFH				8E-10	hours	
Lifetime				20	years	
V _{LOS}		External power supply SELV or PELV				
Pollution Degree	Cabinet / Housing	IP54		2	-	
STO wiring	Bundling / Grouping	Separate wiring for STO1, STO2				
	Shielding	Separate shield for STO1, STO2				
Compatibility		Each STO channels has separate + and - terminals PNP (source) or NPN (sink), depending on user connection				
Isolation		Each STO channel is opto-isolated				
Voltage, STOx+ to STOx-	Inactive (torque off)	0		5.6	V	
	Active (motor driven)	18		24	V	
	Abs. maximum, continuous	-70		+70	V	
Voltage	Isolation, STO1 to STO2	±2			KV	
	Isolation, STOx to GND	±2			KV	
Current		STOx+ - STOx- = 24V		3	5	mA
ESD protection		Human body model	±30		kV	

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ Specified currents are intended per drive. Each drive has separate +5V outputs

² To achieve full RS-422 compatibility and enhance noise rejection, it is necessary to connect an 120Ω resistor across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-). This can be done through SW1 and SW2.

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
TECHNO SOFT		Title of document Micro 4804 SX3-CAN-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.103.E403.DSH.10C	
			Page: 4 of 5	

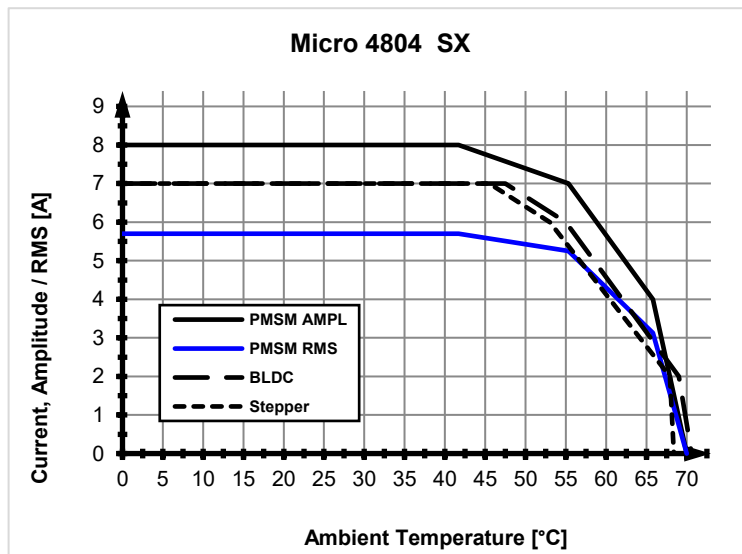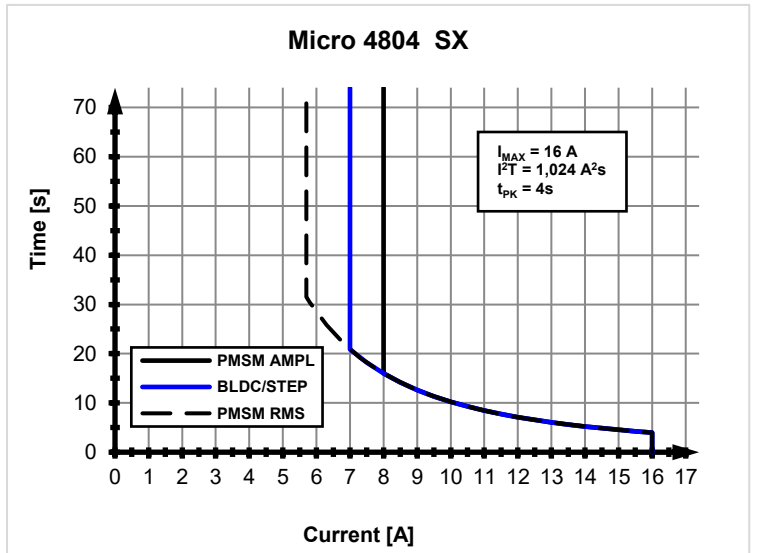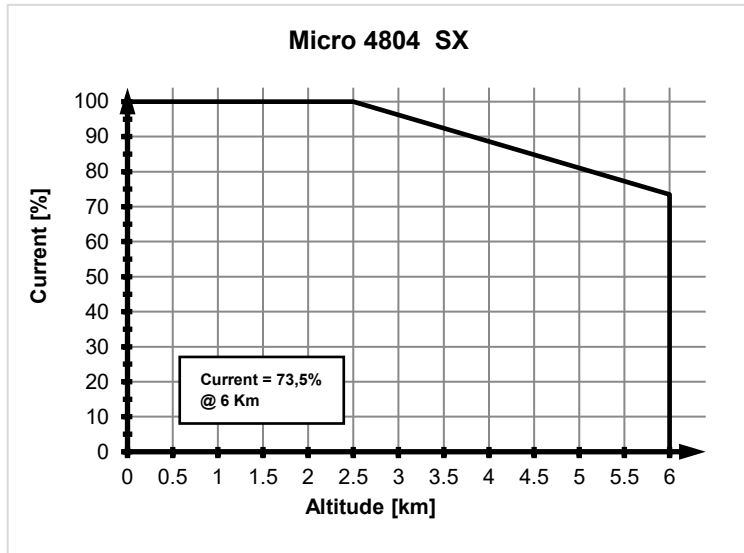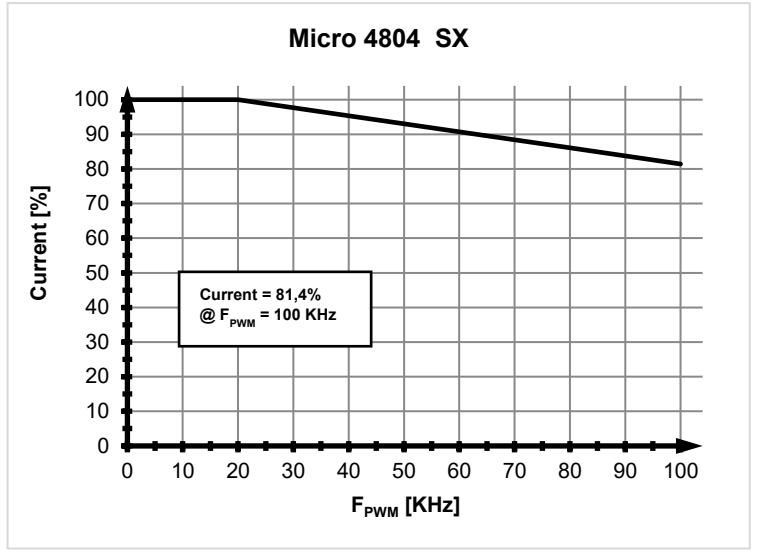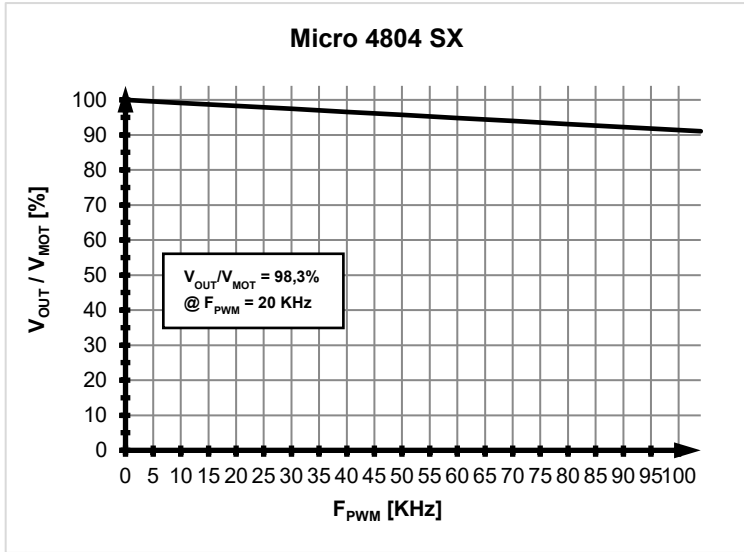

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
		Title of document Micro 4804 SX3-CAN-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.103.E403.DSH.10C	Page: 5 of 5