


# Micro 4804 SX4-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E404

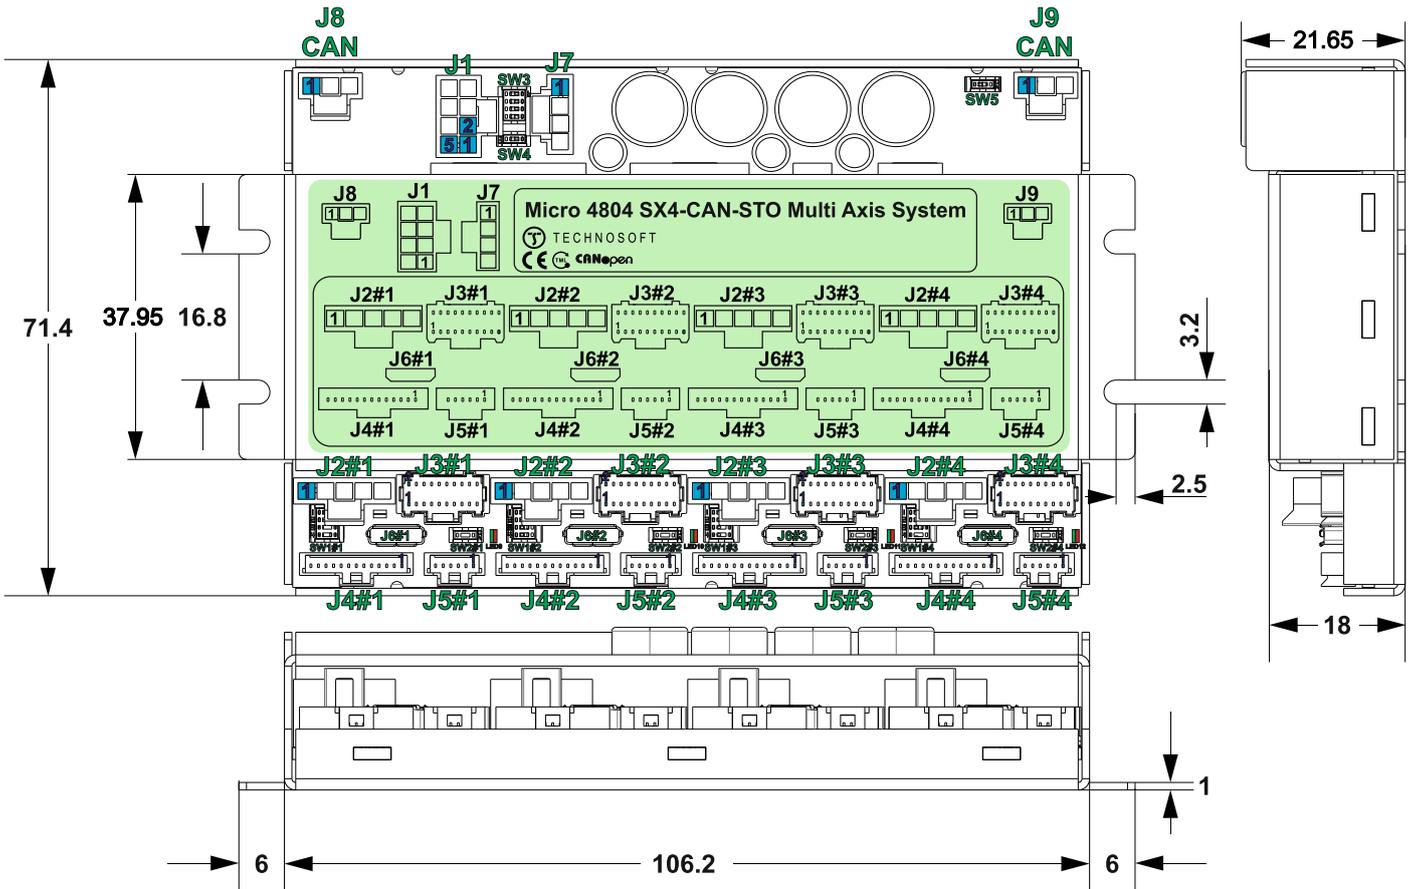

All dimensions are in mm. Drawing not to scale.


| Motor – sensor configurations                                   |      |      |          |             |             |
|---|------|------|----------|-------------|-------------|
| Motor \ Sensor  | PMSM | BLDC | DC BRUSH | STEP (2-ph) | STEP (3-ph) |
| Incr. Encoder   | Ⓢ    |      | Ⓢ        | Ⓢ           |             |
| Incr. Encoder + Dig. Hall                                       | Ⓢ    | Ⓢ    |          |             |             |
| Linear Halls  | Ⓢ    |      |          |             |             |
| Digital Hall control only                                       | Ⓢ    |      |          |             |             |
| BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic | Ⓢ    | Ⓢ    | Ⓢ        | Ⓢ           |             |
| Tacho   |      |      | Ⓢ        |             |             |
| Open-loop (no sensor)   |      |      |          | Ⓢ           | Ⓢ           |

### Features

- Compact 4-axis CAN motion system that integrates a motion controller and drive into a single unit, powered by MotionChip™ technology.
- Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
- Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
- Motor supply: 48V nominal
- Motor output current per axis:
  - Nominal: 4A<sub>RMS</sub> / 5.7A amplitude for PMSM motors
  - 5A for DC / BLDC / Step motors
  - Peak: 11.3A<sub>RMS</sub> / 16A amplitude
- Logic supply: 24V nominal, 48V max

- Feedback Devices per axis:
  - 1 x Hall sensor interface (digital or linear)
  - Feedback#1 and Feedback#2 can be:
    - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
    - Absolute encoder: differential or single-ended. Supported protocols: SSI, BiSS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- Integrated termination resistors for each axis's feedback connectors, selectable via sliding switches
- 1 x analogue input per axis, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs per axis: 2 for limit switches + one general-purpose, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os per axis, each software selectable as:
  - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
  - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 50mA.
- Communication interfaces: RS232; USB; TMLCAN and CANopen (CiA 301 v4.2, CiA 305 v.2.2.13 and CiA 402 v3.0) protocols
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/ EN61508-3; -4/ EN ISO 13849-1.
- 24Kwords E<sup>2</sup>ROM per axis to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory per axis for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I<sup>2</sup>t drive & motor, control error
- >98% voltage efficiency, >98% power efficiency

|             |                                    |   |   |              |
|-------------|------------------------------------|---|---|--------------|
| Name<br>ALN | First edition<br>September 2, 2024 | Document template: P099.TQT.564.0001  | Last edition<br>February 24, 2026           | Visa:<br>AS  |
|             |                                    | Title of document<br><b>Micro 4804 SX4-CAN-STO Multi Axis System PRODUCT DATA SHEET</b> | N° document<br><b>P020.103.E404.DSH.10J</b> | Page: 1 of 5 |



# Micro 4804 SX4-CAN-STO Multi Axis System DATASHEET P/N: P020.103.E404

| Mating Connectors            |            |                       |   |   |
|------------------------------|------------|-----------------------|---|---|
| Producer                     | Part No.   | Connector             | Description   |   |
| Molex                        | 1053071203 | J8, J9                | 1x3 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 3 circuits                                  |   |
| Molex                        | 1053071204 | J7                    | 1x4 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 4 circuits                                  |   |
| Molex                        | 1053071205 | J2#x1                 | 1x5 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 5 circuits                                  |   |
| Molex                        | 5011892010 | J3#x1                 | 2x10 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 20 Circuits                              |   |
| Molex                        | 5013301300 | J4#x1                 | 1x13 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 13 Circuits                              |   |
| Molex                        | 1053081208 | J5#x1                 | 1x6 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 6 Circuits                                |   |
| Molex                        | 5013300600 | J1                    | Nano-Fit Receptacle Housing, TPA Capable, 2.5mm Pitch, Dual Row, 8 Circuits, Black, Glow-Wire Capable |   |
| Tensility International Corp | 1002333    | J1, J7, J8, J9, J2#x1 | USB cable, Cable USB A Male - Micro B Male, 1m, shielded, black, 9.6mm plastic width                  |   |
| Molex                        | 0797582140 | J1, J7, J8, J9, J2#x1 | Pre-Crimped wires for Nano-Fit  | Cable Assembly, Nano-Fit Crimp Terminal Socket to Nano-Fit Crimp Terminal Socket, 300mm     |
| Molex                        | 0797581019 | J3#x1, J4#x1, J5#x1   | Pre-Crimped wires for Pico-Clasp  | Cable Assembly, Pico-Clasp Crimp Terminal Socket to Pico-Clasp Crimp Terminal Socket, 300mm |
| Molex                        | 1053002400 | J1, J7, J8, J9, J2#x1 | Pins for Nano-Fit   | Nano-Fit Crimp Terminal, Female, 0.76µm Gold (Au) Plating, Lubricated, 20-22AWG             |
| Molex                        | 5011937000 | J3#x1, J4#x1, J5#x1   | Pins for Pico-Clasp   | 1.00mm Pitch, Pico-Clasp Female Crimp Terminal, Gold Plating 0.10µm, 28-32 AWG, Reel        |
| Molex                        | 638275600  | J1, J7, J8, J9, J2#x1 | Crimp tool Nano Fit   | Crimp Tool, Ratchet, Molex Nano-Fit 105300 Series 20-22AWG Socket Contacts, 207129 Series   |
| Molex                        | 638191500  | J3#x1, J4#x1, J5#x1   | Crimp tool Pico-Clasp   | Crimp Tool, Ratchet, Molex Pico-Clasp 501193 & 501334 Series 32-28AWG Contacts              |

| Pin         | Name  | Type | Description   |
|-------------|-------|------|---|
| J1<br>1,2,3 | +Vmot | I    | Positive terminal of the motor supply: 7 to 48 V <sub>DC</sub> . Internally connected to all 4 drives +V <sub>mot</sub> pins. |
| 4           | PE    | -    | Earth connection.   |
| 5,6,7       | GND   | -    | Ground return. Internally connected to other GND pins.  |
| 8           | PE    | -    | Earth connection  |

| Pin        | Name  | Type | Description   |
|------------|-------|------|---|
| J2#x1<br>1 | A/A+  | O    | Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors |
| 2          | B/A-  | O    | Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors |
| 3          | C/B+  | O    | Phase C for 3-ph motors, B+ for 2-ph steppers                             |
| 4          | Cr/B- | O    | Chopping resistor / Phase B- for 2-ph steppers                            |
| 5          | PE    | -    | Earth connection for motor cable shielding                                |

| Pin        | Name     | Type | Description  |
|------------|----------|------|--|
| J4#x1<br>1 | 232TX    | O    | RS-232 Data Transmission.  |
| 2          | 232RX    | I    | RS-232 Data Reception.   |
| 3          | GND      | -    | Ground return.   |
| 4          | +Vlog    | I    | Positive terminal of the logic supply input: 6 to 48 V <sub>DC</sub> . Internally connected to other +V <sub>log</sub> pins. |
| 5          | IN2/LSP  | I    | 5-48V digital NPN input. Positive limit switch input.  |
| 6          | IN3/LSN  | I    | 5-48V digital NPN input. Negative limit switch input.  |
| 7          | I/O0     | I/O  | 5-48V 1.5A NPN (sink) general-purpose digital programmable output OUT0 or input IN0  |
| 8          | I/O1     | I/O  | 5-48V 50mA NPN (sink) general-purpose digital programmable output OUT1 or input IN1  |
| 9          | I/O4     | I/O  | 5-48V 50mA NPN (sink) general-purpose digital programmable output OUT4 or input IN4  |
| 10         | IN5      | I    | 5-48V digital general-purpose NPN input  |
| 11         | GND      | -    | Ground return. Internally connected to other GND pins.   |
| 12         | AnalogIn | I    | Analog input (range software selectable 0-5V or ±10V)  |
| 13         | +5V      | O    | Supply for all feedback sensors.   |

| Pin | Name                    | Type | Description  |
|-----|-------------------------|------|--|
| 1   | GND                     | -    | Ground return. Internally connected to other GND pins.   |
| 2   | Hall1                   | I    | Digital Hall, or Linear Hall sensor 1.   |
| 3   | +5V                     | O    | 5V supply for all feedback sensors.  |
| 4   | Hall2                   | I    | Digital Hall, or Linear Hall sensor 2.   |
| 5   | +5V                     | O    | 5V supply for all feedback sensors.  |
| 6   | Hall3                   | I    | Digital Hall, or Linear Hall sensor 3.   |
| 7   | EncA1+/EncA1 Dt1+/Dt1   | I    | Encoder 1 A+ / Data+ diff. input or single-ended input. Set SW1 pin 1 for differential.                                      |
| 8   | GND                     | -    | Ground return.   |
| 9   | EncA1-/Dt1-             | I    | Encoder 1 A-/Data- diff. input. Set SW1 pin 1 for differential.  |
| 10  | +5V                     | O    | 5V supply for all feedback sensors.  |
| 11  | EncB1+/EncB1 Clk1+/Clk1 | I    | Encoder 1 B+ / Clock+ diff. input or single-ended input. Set SW1 pin 2 for differential.                                     |
| 12  | EncA2+/EncA2 Dt2+/Dt2   | I    | Incr. encoder 2 A / Data+ diff. input or single-ended input. Set SW1 pin 4 for differential.                                 |
| 13  | EncB1-/Clk1-            | I    | Encoder 1 B- / Clock- diff. input. Set SW1 pin 2 for differential.   |
| 14  | EncA2-/Dt2-             | I    | Incr. encoder 2 A- / Data - diff. input. Set SW1 pin 4 for differential.   |
| 15  | Z / Z1+                 | I    | Incr. encoder 1 Z / Z+ diff. input or single-ended input. Set SW1 pin 3 for differential.                                    |
| 16  | EncB2+/EncB2 Clk2+/Clk2 | I/O  | Encoder 2 B+ / Clock+ diff. input or single-ended input. Set SW2 pin1 for differential.                                      |
| 17  | Z-                      | I    | Incr. encoder 1 Z- diff. input. Set SW1 pin 3 for differential.  |
| 18  | EncB2-/Clk2-            | I    | Encoder 2 B- / Clock- diff. input. Set SW2 pin1 for differential.  |
| 19  | GND                     | -    | Ground return.   |
| 20  | +Vlog                   | I    | Positive terminal of the logic supply input: 6 to 48 V <sub>DC</sub> . Internally connected to other +V <sub>log</sub> pins. |

| Pin         | Name   | Type | Description                           |
|-------------|--------|------|---------------------------------------|
| J8, J9<br>1 | GND    | -    | Ground return.                        |
| 2           | Can Lo | I/O  | CAN-Bus negative line (dominant low)  |
| 3           | Can Hi | I/O  | CAN-Bus positive line (dominant high) |

| Port  | Name | Type | Description                             |
|-------|------|------|---|
| J6#x1 | USB  | I/O  | Standard Micro USB for PC data transfer |

| Pin        | Name  | Type | Description   |
|------------|-------|------|---|
| J5#x1<br>1 | STO2- | I    | Safe Torque Off input 2, negative return (opto-isolated, 0V)    |
| 2          | STO2+ | I    | Safe Torque Off input 2, positive input (opto-isolated, 18÷40V) |
| 3          | PE    | -    | Earth connection  |
| 4          | PE    | -    | Earth connection  |
| 5          | STO1+ | I    | Safe Torque Off input 1, positive input (opto-isolated, 18÷40V) |
| 6          | STO1- | I    | Safe Torque Off input 1, negative return (opto-isolated, 0V)    |


| Pin     | Name  | Type | Description   |
|---------|-------|------|---|
| J7<br>1 | Rsvd  | -    | Reserved. Do not connect.   |
| 2       | GND   | -    | Ground return. Internally connected to other GND pins.  |
| 3       | +Vlog | I    | Positive terminal of the logic supply input: 6 to 48 V <sub>DC</sub> . Internally connected to all 4 drives +V <sub>log</sub> pins. |
| 4       | PE    | -    | Earth connection  |

| SW2#x1 – Feedback Resistors selection |   |
|---------------------------------------|---|
| 1                                     | ON = Connect a 120Ω resistor between EncB2/Clk2- and EncB2+/EncB2/Clk2+/Clk2 feedback pins. |

| SW1#x1 – Feedback Resistors selection |   |
|---------------------------------------|---|
| Position                              | Description   |
| 1                                     | ON = Connect a 120Ω resistor between EncA1-/Dt1- and EncA1+/EncA1/Dt1+/Dt1 feedback pins.   |
| 2                                     | ON = Connect a 120Ω resistor between EncB1/Clk1- and EncB1+/EncB1/Clk1+/Clk1 feedback pins. |
| 3                                     | ON = Connect a 120Ω resistor between Z1- and Z1+ feedback pins.                             |
| 4                                     | ON = Connect a 120Ω resistor between EncA2-/Dt2- and EncA2+/EncA2/Dt2+/Dt2 feedback pins.   |

1 "x" can be drive 1, 2, 3 or 4

|             |                                    |   |   |              |
|-------------|------------------------------------|---|---|--------------|
| Name<br>ALN | First edition<br>September 2, 2024 | Document template: P099.TQT.564.0001  | Last edition<br>February 24, 2026           | Visa:<br>AS  |
|             |                                    | Title of document<br><b>Micro 4804 SX4-CAN-STO<br/>Multi Axis System<br/>PRODUCT DATA SHEET</b> | N° document<br><b>P020.103.E404.DSH.10J</b> | Page: 2 of 5 |



# Micro 4804 SX4-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E404

## SW5 – CAN Resistors selection

- 1 ON = Connect an 120Ω resistor between CAN Hi and CAN Lo signals. Physically located near J9 connector.

## SW4 – Protocol selection

- 1 OFF – CANOpen mode  
ON – TMLCAN mode

## SW3 - AxisID selection

| SW3   |       |       |       | Drive AxisID |          |          |          |
|-------|-------|-------|-------|--------------|----------|----------|----------|
| Pin 1 | Pin 2 | Pin 3 | Pin 4 | Drive #1     | Drive #2 | Drive #3 | Drive #4 |
| off   | off   | off   | off   | 1            | 2        | 3        | 4        |
| off   | off   | off   | on    | 9            | 10       | 11       | 12       |
| off   | off   | on    | off   | 17           | 18       | 19       | 20       |
| off   | off   | on    | on    | 25           | 26       | 27       | 28       |
| off   | on    | off   | off   | 33           | 34       | 35       | 36       |
| off   | on    | off   | on    | 41           | 42       | 43       | 44       |
| off   | on    | on    | off   | 49           | 50       | 51       | 52       |
| off   | on    | on    | on    | 57           | 58       | 59       | 60       |
| on    | off   | off   | off   | 65           | 66       | 67       | 68       |
| on    | off   | off   | on    | 73           | 74       | 75       | 76       |
| on    | off   | on    | off   | 81           | 82       | 83       | 84       |
| on    | off   | on    | on    | 89           | 90       | 91       | 92       |
| on    | on    | off   | off   | 97           | 98       | 99       | 100      |
| on    | on    | off   | on    | 105          | 106      | 107      | 108      |
| on    | on    | on    | off   | 113          | 114      | 115      | 116      |
| on    | on    | on    | on    | 121          | 122      | 123      | 124      |

## LEDs

|                             |   |                                      |
|-----------------------------|---|--------------------------------------|
| <b>TML ERR</b> <b>RED</b>   | Turned on when the drive detects an error condition.                                    | LED9 → drive #1<br>LED10 → drive #2  |
| <b>TML RDY</b> <b>GREEN</b> | Lit after power-on when the drive initialization ends. Turned off when an error occurs. | LED11 → drive #3<br>LED12 → drive #4 |

## Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24$  VDC;  $V_{MOT} = 48$  VDC;  $F_{PWM} = 20$  kHz
- Ambient temperature = 25°C (typical values) / 0°C...40°C (min/max values)
- Supplies start-up / shutdown sequence: -any-
- Load current = nominal
- Data is provided for each axis of the system


| Operating Conditions                      |  | Min.   | Typ.     | Max.            | Units           |
|---|--|--|----------|-----------------|-----------------|
| Ambient temperature                       |  | 0  |          | 40 <sup>1</sup> | °C              |
| Ambient humidity                          |  | 0  |          | 90              | %Rh             |
| Altitude / pressure <sup>2</sup>          |  | -0.1   | 0 ± 2.5  | 2               | Km              |
| Ambient Pressure                          |  | 0  | 0.75 ± 1 | 10.0            | atm             |
| Storage Conditions                        |  | Min  | Typ      | Max             | Units           |
| Ambient temperature                       |  | -40  |          | 100             | °C              |
| Ambient humidity                          |  | 0  |          | 100             | %Rh             |
| Ambient Pressure                          |  | 0  |          | 10.0            | atm             |
| ESD capability (Human body model)         |  |  |          | ±5              | kV              |
| Original packaging                        |  |  |          | ±15             | kV              |
| Mechanical Mounting                       |  | Min  | Typ      | Max             | Units           |
| Airflow                                   |  | natural convection, closed box, vertical                                   |          |                 |                 |
| Spacing required between adjacent drives  |  | 10   |          |                 | mm              |
| Spacing required above drive              |  | 30   | 80       |                 |                 |
| Environmental Characteristics             |  | Min.   | Typ.     | Max.            | Units           |
| Size (Length x Width x Height)            |  | 118.2 x 71.4 x 21.7  |          |                 | mm              |
| Global size                               |  | ~4.65 x 2.81 x 0.85  |          |                 | inch            |
| Weight                                    |  | 165  |          |                 | g               |
| Cleaning agents                           |  | Dry cleaning is recommended  |          |                 |                 |
| Protection degree                         |  | According to IEC60529 IP20   |          |                 |                 |
| Power dissipation                         |  | Idle ( $I_{MOT} = 0A$ )  | 1        | 1.2             | W               |
| Full power ( $I_{MOT} = \text{nominal}$ ) |  |  | 2.0      | 2.4             |                 |
| Power efficiency                          |  | Full power ( $I_{MOT} = \text{nominal}$ )                                  | 98.7     |                 | %               |
| Voltage efficiency                        |  | $f_{PWM} = 20KHz$  | 98.3     |                 |                 |
| $f_{PWM} = 100KHz$                        |  |  | 91.4     |                 |                 |
| Surface temperature of metallic baseplate |  | 40   |          |                 | °C              |
| Logic Supply Input (+V <sub>LOG</sub> )   |  | Min  | Typ.     | Max.            | Units           |
| Nominal values                            |  | 6  | 24       | 48              | V <sub>DC</sub> |
| Supply voltage                            |  | Absolute maximum values, drive operating but outside guaranteed parameters | 4.9      | 50              | V <sub>DC</sub> |
| Absolute maximum values, continuous       |  | -0.5   |          | 52              | V <sub>DC</sub> |
| Supply current                            |  | +V <sub>LOG</sub> = 12V  | 90       | 150             | mA              |
| +V <sub>LOG</sub> = 24V                   |  |  | 60       | 90              |                 |
| +V <sub>LOG</sub> = 48V                   |  |  | 45       | 60              |                 |
| Utilization category                      |  | Acc. to 60947-4-1 ( $I_{PEAK} \leq 1.05 \cdot I_{NOM}$ )                   |          |                 | DC-1            |

| Motor Supply Input (+V <sub>MOT</sub> )   |  | Min   | Typ. | Max.              | Units                 |       |    |
|---|--|---|------|-------------------|-----------------------|-------|----|
| Nominal values  |  | 7   |      | 48                | V <sub>DC</sub>       |       |    |
| Supply voltage  |  | Absolute maximum values, drive operating but outside guaranteed parameters        | 6    | 50                | V <sub>DC</sub>       |       |    |
| Absolute maximum values, continuous   |  | -0.5  |      | 52                | V <sub>DC</sub>       |       |    |
| Supply current  |  | Idle  | 0.3  |                   | mA                    |       |    |
| Operating   |  | -16   | ±7   | +16               | A                     |       |    |
| Voltage measurement error   |  |   |      |                   | ±0.15 ±0.25 V         |       |    |
| Utilization category  |  | Acc. to 60947-4-1 ( $I_{PEAK} \leq 4.0 \cdot I_{NOM}$ )                           |      |                   | DC-3                  |       |    |
| Motor Outputs (A/A+, B/A-, C/B+, CR/B-)   |  | Min.  | Typ. | Max.              | Units                 |       |    |
| Nominal current   |  | PMSM motors sinusoidal amplitude  |      | ±5.7              | A                     |       |    |
| PMSM motors sinusoidal RMS  |  |   |      | 4                 | A <sub>RMS</sub>      |       |    |
| DC/BLDC/STEP motors continuous  |  |   |      | 5                 | A                     |       |    |
| Peak current  |  | maximum 4 seconds   |      | -16               | +16                   | A     |    |
| Short-circuit protection threshold  |  |   |      | ±25               | A                     |       |    |
| Short-circuit protection delay  |  |   |      | 2.6               | 3.5                   | µs    |    |
| On-state voltage drop   |  | Nominal output current; including typical mating connector contact resistance     |      | 50                | 70                    | mV    |    |
| Off-state leakage current   |  |   |      | 0.3               | 1                     | mA    |    |
| Current measurement   |  | Accuracy (FS = Full Scale)  |      | ±1                | ±1.5                  | %FS   |    |
| Noise (current ≤ 2A)  |  |   |      | ±4                | ±6                    | mA    |    |
| Noise (current ≥ 2A)  |  |   |      | ±30               | ±50                   | mA    |    |
| Offset drift (compensated @ AxisOn)   |  |   |      | ±0.16             |                       | mA/°C |    |
| Motor inductance (phase-to-phase)   |  | Recommended value to avoid spurious short-circuit protection, triggered by ripple |      |                   |                       | µH    |    |
| Fast loop <sup>3</sup> V <sub>MOT</sub>   |  | 50µs  | 48V  | 133               |                       |       |    |
| 100µs   |  | 48V   | 266  |                   |                       |       |    |
| 50µs  |  | 24V   | 66   |                   |                       |       |    |
| 100µs   |  | 24V   | 133  |                   |                       |       |    |
| Motor electrical time-constant (L/R)  |  | Recommended value for ±5% current measurement error                               |      | 330               |                       | µs    |    |
| F <sub>PWM</sub> = 20 kHz   |  |   |      | 170               |                       |       |    |
| F <sub>PWM</sub> = 40 kHz   |  |   |      | 140               |                       |       |    |
| F <sub>PWM</sub> = 60 kHz   |  |   |      | 80                |                       |       |    |
| F <sub>PWM</sub> = 80 kHz   |  |   |      | 66                |                       |       |    |
| F <sub>PWM</sub> = 100 kHz  |  |   |      |                   |                       |       |    |
| Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5)   |  | Min.  | Typ. | Max.              | Units                 |       |    |
| Mode compliance   |  | NPN (sink)  |      |                   |                       |       |    |
| Default state   |  | Input floating (wiring disconnected)  |      | Logic HIGH        |                       |       |    |
| Input voltage   |  | Logic "LOW"   |      | 1.4               | 1.8                   | V     |    |
| Logic "HIGH"  |  | IN0, IN1, IN4, IN5  |      | 3.1               | 2.5                   |       |    |
| Hysteresis  |  |   |      | 0.9               | 1.1                   | 1.4   |    |
| Logic "LOW"   |  | IN2/LSP, IN3/LSN  |      | 4                 | 3.5                   | 1.6   |    |
| Logic "HIGH"  |  |   |      |                   |                       |       |    |
| Hysteresis  |  |   |      |                   | 0.6                   |       |    |
| Floating voltage (not connected)  |  |   |      |                   | 4.7                   |       |    |
| Absolute maximum, continuous  |  | IN2/LSP, IN3/LSN, IN5   |      | -2                | +80                   |       |    |
| IN0, IN1, IN4   |  |   |      | -0.5              | V <sub>LOG</sub> +0.5 |       |    |
| Input current   |  | Logic "LOW"; Pulled to GND  |      | 6.5               | 8                     | mA    |    |
| Logic "HIGH"; Pulled to +24V  |  |   |      | 0.2               | 0.4                   |       |    |
| Input frequency   |  |   |      | 0                 | 500                   | kHz   |    |
| Minimum pulse   |  |   |      | 1                 |                       | µs    |    |
| ESD protection - Human body model   |  |   |      | ±2                |                       | kV    |    |
| Digital Outputs (OUT0, OUT1, OUT4)  |  | Min.  | Typ. | Max.              | Units                 |       |    |
| Mode compliance   |  | NPN (sink) 24V  |      |                   |                       |       |    |
| Load type   |  | Resistive, Inductive  |      |                   |                       |       |    |
| Default state   |  | Not supplied (+V <sub>LOG</sub> floating)   |      | High-Z (floating) |                       |       |    |
| Immediately after power-up  |  |   |      | Logic "HIGH"      |                       |       |    |
| Output voltage  |  | Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4                 |      |                   | 0.4                   | V     |    |
| Logic "HIGH"; output current = 0, no load   |  |   |      | 4                 | 4.7                   | 5.2   |    |
| Logic "HIGH", external load to +V <sub>LOG</sub>  |  |   |      |                   | V <sub>LOG</sub>      |       |    |
| Absolute maximum, continuous (free-wheeling diodes to +V <sub>LOG</sub> to GND)                                   |  |   |      | -0.5              | V <sub>LOG</sub> +0.5 |       |    |
| Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>  |  |   |      | -1                | V <sub>LOG</sub> +1   |       |    |
| Output current  |  | Logic "LOW", sink current, short duration, duty cycle ≤ 1%                        |      | 5s max            | OUT1, OUT4            | 0.1   |    |
| 5s max  |  | OUT0  |      |                   |                       | 2     |    |
| 0.5s max  |  | OUT1, OUT4  |      |                   |                       | 0.15  |    |
| 0.5s max  |  | OUT0  |      |                   |                       | 2.5   |    |
| Logic "LOW", sink current, continuous; V <sub>OUT</sub> ≤ 0.4V  |  | OUT1, OUT4  |      |                   |                       | 0.05  |    |
| OUT0  |  |   |      |                   |                       | 1.5   |    |
| Logic "HIGH", source current; external load to GND; V <sub>OUT</sub> ≥ 2.0V                                       |  |   |      |                   |                       | 5     | mA |
| Logic "HIGH", leakage current; external load to +V <sub>LOG</sub> ; V <sub>OUT</sub> = V <sub>LOG</sub> max = 40V |  | V <sub>LOG</sub> =24V   |      | 0.18              | 0.2                   | mA    |    |
| V <sub>LOG</sub> =48V   |  |   |      | 0.42              | 0.45                  |       |    |
| Minimum pulse width   |  |   |      | 0.5               |                       | µs    |    |
| ESD protection - Human body model   |  |   |      | ±25               |                       | kV    |    |

<sup>1</sup> Operating temperature at higher temperatures is possible with reduced current and power ratings  
<sup>2</sup> Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

<sup>3</sup> Fast loop period of 50µs is not possible with all feedback device types.

|                    |                                    |   |   |              |
|--------------------|------------------------------------|---|---|--------------|
| Name<br>ALN        | First edition<br>September 2, 2024 | Document template: P099.TQT.564.0001  | Last edition<br>February 24, 2026           | Visa:<br>AS  |
| <b>TECHNO</b> SOFT |                                    | Title of document<br><b>Micro 4804 SX4-CAN-STO Multi Axis System PRODUCT DATA SHEET</b> | N° document<br><b>P020.103.E404.DSH.10J</b> | Page: 3 of 5 |



# Micro 4804 SX4-CAN-STO Multi Axis System DATASHEET

P/N: P020.103.E404

| Supply Output (+5V)  |  | Min.  | Typ.      | Max.   | Units |
|--|--|---|-----------|--------|-------|
| Output voltage   | Current sourced = 400mA <sup>1</sup>                       | 5.05  | 5.2       | 5.25   | V     |
| Output current <sup>1</sup>  | Output voltage ≥ 4.85V                                     |   |           | 1,200  | mA    |
| Short-circuit to GND protection  |  | Yes / Drive resets at event                                       |           |        |       |
| Over-voltage protection  |  | NOT protected   |           |        |       |
| ESD protection   | Human body model   | ±1  |           |        | KV    |
| Hall Inputs (Hall1, Hall2, Hall3)  |  | Min.  | Typ.      | Max.   | Units |
| Mode compliance  |  | TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V |           |        |       |
| Default state  | Input floating (Wiring disconnected)                       | 4.5   | 4.8       | 5.2    |       |
| Input voltage  | Digital  | Logic "LOW"   | 1.5       | 1.7    | V     |
|  |  | Logic "HIGH"  | 3         | 2.5    |       |
|  | Hysteresis   |   | 0.5       |        |       |
|  | Analog   | 0   | 0.5...4.5 | 4.95   |       |
| Input current  | Logic "LOW"; Pull to GND                                   |   | 2.4       |        | mA    |
|  | Logic "HIGH"; Internal 2.2KΩ pull-up to +5                 |   | 0         |        |       |
| Minimum pulse width  |  |   | 66        |        | μs    |
| ESD protection - Human body model  |  |   | ±15       |        | kV    |
| Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-) <sup>2</sup>                                   |  | Min.  | Typ.      | Max.   | Units |
| Single-ended mode compliance   | Leave A1-, B1-, Z1-, A2-, B2- floating                     | TTL / CMOS / Open-collector (NPN sink)                            |           |        |       |
| Single-ended threshold   | A1+, B1+, Z1+, A2+, B2+                                    | 1.3   | 1.4       | 1.5    | V     |
| Single-ended input current   | Input pulled to GND against on-board 2.2 KΩ pull-up to +5V |   | 2.4       | 2.7    | mA    |
| Differential mode compliance   | For full RS422 compliance, see <sup>1</sup>                | TIA/EIA-422-A   |           |        |       |
| Input voltage  | Hysteresis   | ±0.03   | ±0.05     | ±0.2   | V     |
|  | Differential mode  | -15   |           | +15    |       |
|  | Common-mode range (A+ to GND, etc.)                        | -7  |           | +12    |       |
| Input impedance, differential  | Common-mode (A1+ to GND, etc.)                             |   | 2.2       |        | kΩ    |
|  | Differential (A1+ to A1-, etc.)                            |   | 4.4       |        |       |
| Input frequency  | Differential mode  | 0   |           | 15     | MHz   |
| Minimum pulse width  | Differential mode  | 33  |           |        | ns    |
| ESD protection   | Human body model   | ±30   |           |        | kV    |
| RS-232   |  | Min.  | Typ.      | Max.   | Units |
| Compliance   |  | TIA/EIA-232-C   |           |        |       |
| Bit rate   | Default  | 9600  |           |        |       |
|  | Software selectable  | 9600  |           | 115200 | Baud  |
| Output voltage   |  | ±5  | ±5.7      |        | V     |
| Short-circuit  | 232TX to GND   | Guaranteed  |           |        |       |
| Input voltage  | Absolute maximum, continuous                               | -30   |           | +30    | V     |
| ESD protection   | Human body model   | ±15   |           |        | kV    |
| Absolute encoder interface:<br>SSI, BiSS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki                                  |  |   |           |        |       |
| Single-ended mode  | Not recommended, reduced robustness & speed                |   |           |        |       |
| Differential mode compliance   | For full RS422 compliance, see <sup>2</sup>                | TIA/EIA-422-A   |           |        |       |
| Output voltage   | Differential; 50Ω differential load                        | 1.5   | 3.3       |        | V     |
|  | Common-mode, referenced to GND                             | 1   | 1.7       | 3      |       |
| CLOCK frequency  | Nikon, Sanyo Denki   | 2.5, 4  |           |        |       |
|  | Panasonic, Tamagawa  | 2.5   |           |        |       |
|  | All others   | 1, 2, 3, 4  |           |        |       |
| Output Short-circuit protection  | Common-mode voltage ±15V                                   | Yes, protected  |           |        |       |
| DATA format  | Software selectable  | Binary / Gray   |           |        |       |
|  |  | Single-turn / Multi-turn  |           |        |       |
|  |  | Counting direction  |           |        |       |
|  |  | CRC type  |           |        |       |
| DATA resolution  | Including CRC, flags, ...                                  |   | 64        |        | Bits  |
| If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution |  |   |           |        |       |


| Analog Input (REF/ FDBK)         |  | Min.   | Typ.  | Max. | Units |
|----------------------------------|--|--|-------|------|-------|
| Input voltage                    | Operational range                                | 0...5, -10...+10   |       |      |       |
|                                  | Absolute maximum values, continuous              | -22  |       | +26  | V     |
|                                  | Absolute maximum, surge (duration ≤ 1s)          |  |       | ±38  |       |
| Input impedance                  | To 1.44V   |  |       |      |       |
| Bandwidth (-3dB)                 | Software selectable                              | 0  |       | 5.3  | kHz   |
| Resolution                       |  | 12   |       |      |       |
| Integral linearity               |  |  |       | ±1   | bits  |
| Offset error                     | Range -10V ... +10V                              |  | ±10   | ±30  | mV    |
|                                  | Range 0 ... +5V                                  |  | ±15   | ±40  |       |
| Gain error                       | Range -10V ... +10V                              |  | ±30   | ±50  | mV    |
|                                  | Range 0 ... +5V                                  |  | ±25   | ±40  |       |
| ESD protection                   | Human body model                                 | ±1.5   |       |      | kV    |
| CAN-Bus                          |  | Min.   | Typ.  | Max. | Units |
| Compliance                       |  | CAN 2.0B, ISO 11898-2                                    |       |      |       |
| Software protocols compatibility |  | CiA301, CiA305, CiA402, TechnoCAN, TMLcan                |       |      |       |
| Bit rate                         | Software selectable                              | 125, 250, 500, 1000                                      |       |      | KBaud |
| Node addressing                  | TMlcan   |  |       |      |       |
|                                  | CANopen  | SW3 selectable   |       |      |       |
|                                  |  | 1+123  |       |      |       |
| Voltage                          | Common-mode, operating                           | -12  |       | +12  | V     |
|                                  | Common-mode, max. continuous                     | -58  |       | +58  | V     |
|                                  | Differential, max. continuous                    | -45  |       | +45  | V     |
| Input impedance                  | Differential                                     | 40   |       | 90   | kΩ    |
|                                  | Common-mode                                      | 20   |       | 45   | kΩ    |
| Termination resistor (120Ω)      |  | Included – SW5   |       |      |       |
| ESD protection                   | Human body model                                 | ±10  |       |      | kV    |
| Safe Torque Off (STO) Inputs     |  | Min.   | Typ.  | Max. | Units |
| Safety Integrity Level           |  | SIL 3  |       |      |       |
| Performance Level                |  | PL e   |       |      |       |
| Safety Category                  |  | Cat 3  |       |      |       |
| Reaction time                    |  |  |       | 30   | ms    |
| Ignored diagnostic pulses        | Duration   |  |       | 5    | ms    |
|                                  | Repetition rate                                  |  |       | 20   | Hz    |
| MTTFd                            |  |  | 377   |      | years |
| DC                               |  |  | 90    |      | %     |
| PFH                              |  |  | 8E-10 |      | hours |
| Lifetime                         |  |  | 20    |      | years |
| V <sub>LoS</sub>                 | External power supply                            | SELV or PELV   |       |      |       |
| Pollution Degree                 |  |  |       | 2    | -     |
|                                  | Cabinet / Housing                                | IP54   |       |      |       |
| STO wiring                       | Bundling / Grouping                              | Separate wiring for STO1, STO2                           |       |      |       |
|                                  | Shielding  | Separate shield for STO1, STO2                           |       |      |       |
| Compatibility                    | Each STO channels has separate + and - terminals | PNP (source) or NPN (sink), depending on user connection |       |      |       |
| Isolation                        | Each STO channel is opto-isolated                |  |       |      |       |
| Voltage, STOx+ to STOx-          | Inactive (torque off)                            |  | 0     | 5.6  | V     |
|                                  | Active (motor driven)                            | 18   | 24    |      | V     |
| Voltage                          | Abs. maximum, continuous                         | -70  |       | +70  | V     |
|                                  | Isolation, STO1 to STO2                          | ±2   |       |      | KV    |
| Current                          | Isolation, STOx to GND                           | ±2   |       |      | KV    |
|                                  | STOx+ - STOx- = 24V                              |  | 3     | 5    | mA    |
| ESD protection                   | Human body model                                 | ±30  |       |      | kV    |

<sup>†</sup> Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.


<sup>1</sup> Specified currents are intended per drive. Each drive has separate +5V outputs

<sup>2</sup> To achieve full RS-422 compatibility and enhance noise rejection, it is necessary to connect an 120Ω resistor across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-). This can be done through SW1 and SW2.


|                    |                                    |   |   |             |
|--------------------|------------------------------------|---|---|-------------|
| Name<br>ALN        | First edition<br>September 2, 2024 | Document template: P099.TQT.564.0001  | Last edition<br>February 24, 2026           | Visa:<br>AS |
| <b>TECHNO</b> SOFT |                                    | Title of document<br><b>Micro 4804 SX4-CAN-STO<br/>Multi Axis System<br/>PRODUCT DATA SHEET</b> | N° document<br><b>P020.103.E404.DSH.10J</b> |             |
| Page: 4 of 5       |                                    |   |   |             |




**Micro 4804 SX**

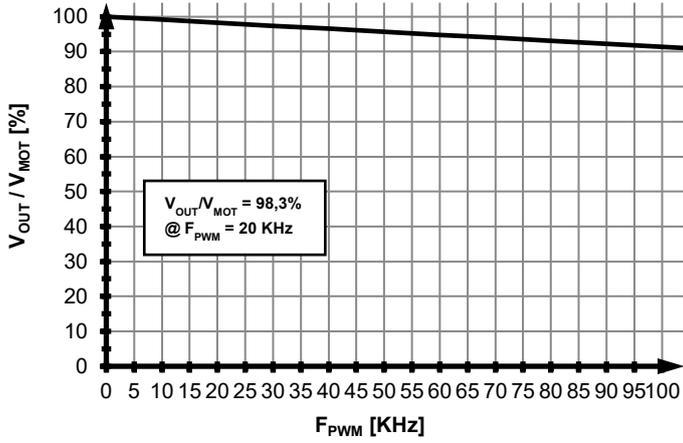


**Micro 4804 SX**

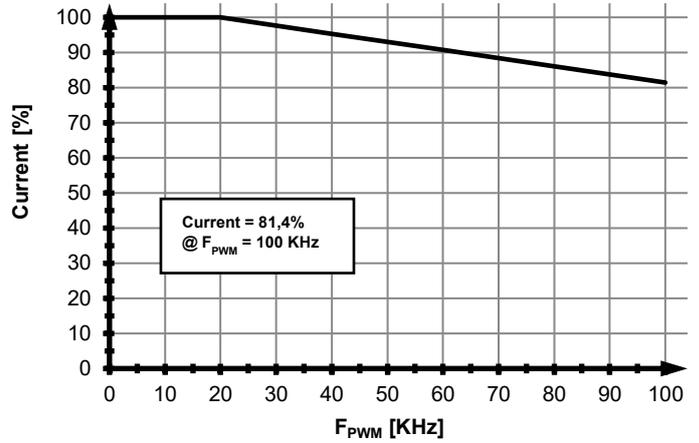


**Micro 4804 SX**

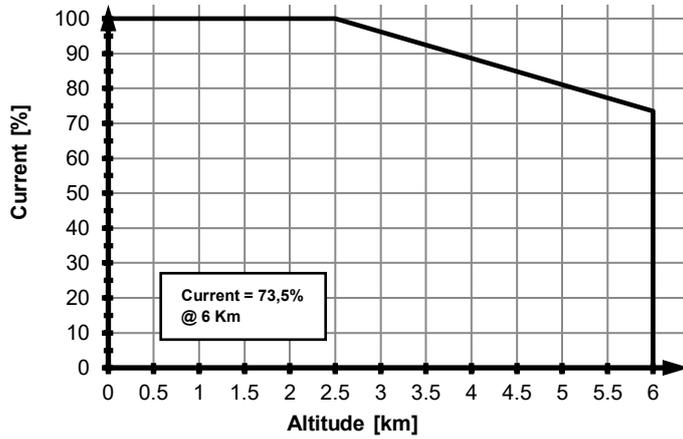

**Micro 4804 SX**

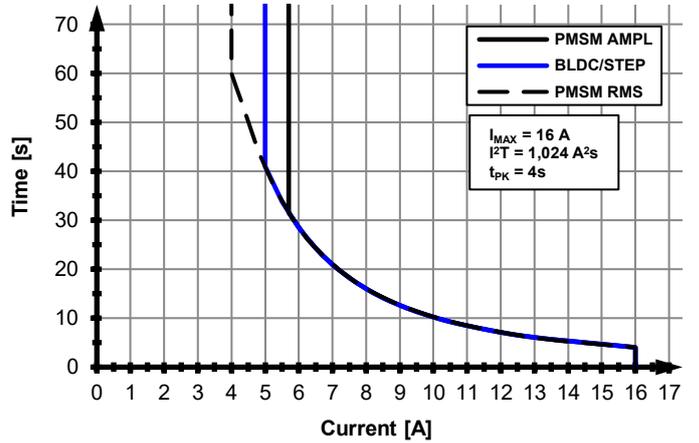

**Micro 4804 SX**

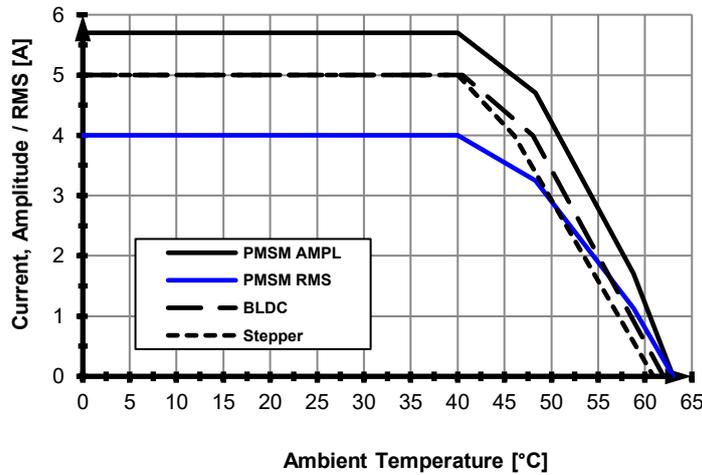

|                   |                                    |  |                                   |   |
|-------------------|------------------------------------|--|-----------------------------------|---|
| Name<br>ALN       | First edition<br>September 2, 2024 | Document template: P099.TQT.564.0001   | Last edition<br>February 24, 2026 | Visa:<br>AS                                 |
| <b>TECHNOSOFT</b> |                                    | <b>Micro 4804 SX4-CAN-STO</b><br><b>Multi Axis System</b><br><b>PRODUCT DATA SHEET</b> |                                   | N° document<br><b>P020.103.E404.DSH.10J</b> |
|                   |                                    |  |                                   |   |