




Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET

P/N: P020.203.E403

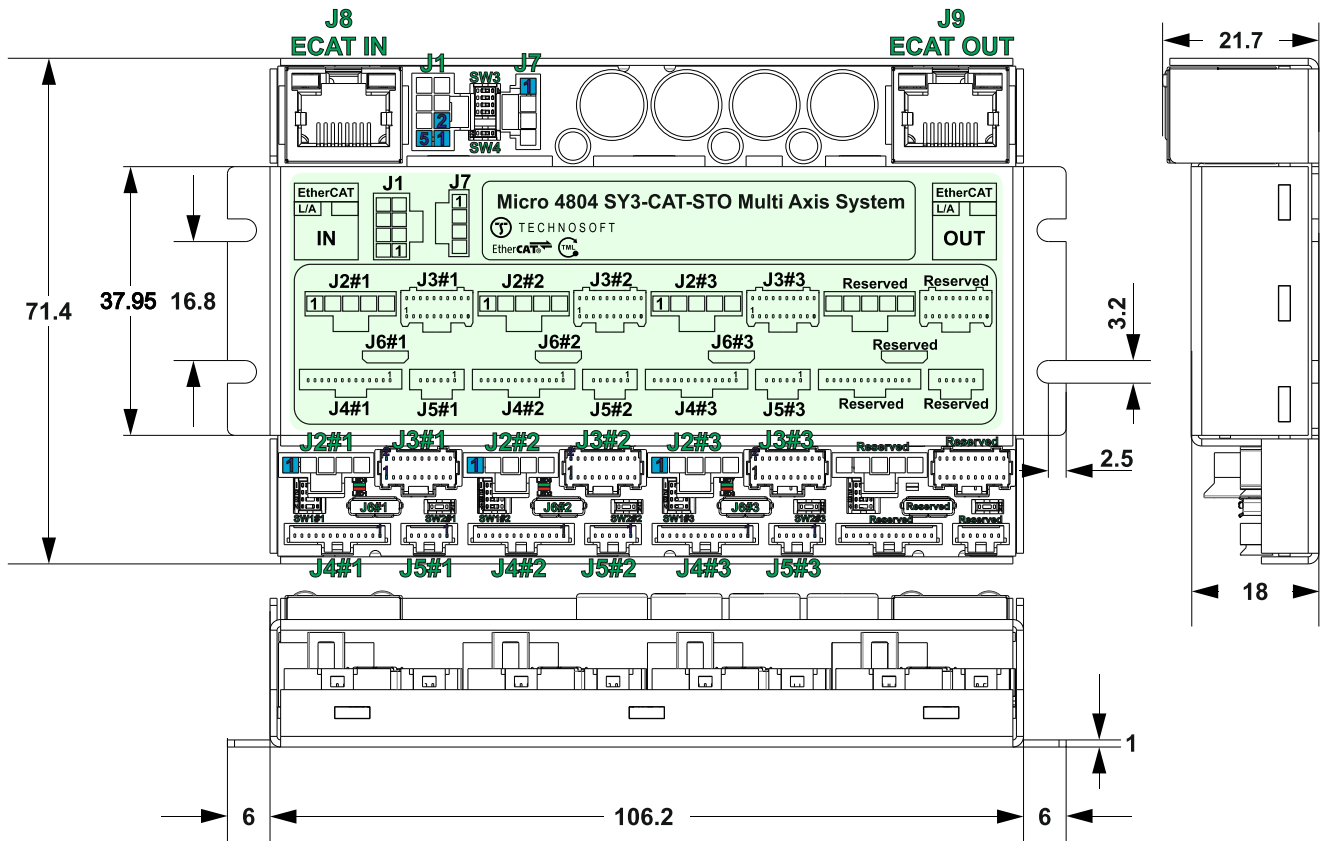

All dimensions are in mm. Drawing not to scale.

Motor – sensor configurations						
Sensor	Motor					
	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)	
Incr. Encoder	Ⓢ		Ⓢ	Ⓢ		
Incr. Encoder + Dig. Hall	Ⓢ	Ⓢ				
Linear Halls	Ⓢ					
Digital Hall control only	Ⓢ					
BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic	Ⓢ	Ⓢ	Ⓢ	Ⓢ		
Tacho			Ⓢ			
Open-loop (no sensor)				Ⓢ	Ⓢ	

Features	
<ul style="list-style-type: none"> Compact 3-axis EtherCAT motion system that integrates a motion controller and drive into a single unit, powered by MotionChip™ technology. 	
<ul style="list-style-type: none"> Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors 	
<ul style="list-style-type: none"> Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more. 	
<ul style="list-style-type: none"> Motor supply: 48V nominal 	
<ul style="list-style-type: none"> Motor output current per axis: <ul style="list-style-type: none"> Nominal: 5.7A_{RMS} / 8A amplitude for PMSM motors 7A for DC / BLDC / Step motors Peak: 11.3A_{RMS} / 16A amplitude 	
<ul style="list-style-type: none"> Logic supply: 24V nominal, 48V max 	

- Feedback Devices per axis:
 - 1 x Hall sensor interface (digital or linear)
- Feedback#1 and Feedback#2 can be:
 - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
 - Absolute encoder: differential or single-ended. Supported protocols: SSI, BiSS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- Integrated termination resistors for each axis's feedback connectors, selectable via sliding switches
- 1 x analogue input per axis, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs per axis: 2 for limit switches + one general-purpose, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os per axis, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 0.1A.
- EtherCAT connection: standard RJ45 ports
- Commissioning (set-up) possible through RS232, USB, FoE (File-over-EtherCAT) or EoE (Ethernet-over-EtherCAT)
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/ EN61508-3; -4/ EN ISO 13849-1.
- 24Kwords E²ROM per axis to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory per axis for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I_t drive & motor, control error
- >98% voltage efficiency, >98% power efficiency

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10D	Page: 1 of 5



Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET P/N: P020.203.E403

Mating Connectors			
Producer	Part No.	Connector	Description
Molex	1053071204	J7	1x4 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 4 circuits
Molex	1053071205	J2#x ¹	1x5 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 5 circuits
Molex	5011892010	J3#x ¹	2x10 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 20 Circuits
Molex	5013301300	J4#x ¹	1x13 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 13 Circuits
Molex	5013300600	J5#x ¹	1x6 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 6 Circuits
Molex	1053081208	J1	Nano-Fit Receptacle Housing, TPA Capable, 2.5mm Pitch, Dual Row, 8 Circuits, Black, Glow-Wire Capable
Tensility International Corp	1002333	J6#x	USB cable, Cable USB A Male - Micro B Male, 1m, shielded, black, 9.6mm plastic width
Molex	0797582140	J1, J7, J2#x ¹	Pre-Crimped wires for Nano-Fit Cable Assembly, Nano-Fit Crimp Terminal Socket to Nano-Fit Crimp Terminal Socket, 300mm
Molex	0797581019	J3#x ¹ , J4#x ¹ , J5#x ¹	Pre-Crimped wires for Pico-Clasp Cable Assembly, Pico-Clasp Crimp Terminal Socket to Pico-Clasp Crimp Terminal Socket, 300mm
Molex	1053001400	J1, J7, J2#x ¹	Nano-Fit Crimp Terminal, Female, 0.76µm Gold (Au) Plating, Lubricated, 24-26 AWG
Molex	5011937000	J3#x ¹ , J4#x ¹ , J5#x ¹	1.00mm Pitch, Pico-Clasp Female Crimp Terminal, Gold Plating 0.1µm, 28-32 AWG, Reel
Molex	638276000	J1, J7, J2#x ¹	Crimp Tool, Ratchet, Molex Nano-Fit 105300 Series 26-24AWG Socket Contacts, 207129 Series
Molex	638191500	J3#x ¹ , J4#x ¹ , J5#x ¹	Crimp Tool, Ratchet, Molex Pico-Clasp 501193 & 501334 Series 32-28AWG Contacts

Pin	Name	Type	Description
1,2,3	+Vmot	I	Positive terminal of the motor supply: 7 to 48 V _{DC} . Internally connected to all 3 drives +V _{mot} pins.
4	PE	-	Earth connection.
5,6,7	GND	-	Ground return. Internally connected to other GND pins.
8	PE	-	Earth connection

Pin	Name	Type	Description
1	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
2	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
3	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
4	Cr/B-	O	Chopping resistor / Phase B- for 2-ph steppers
5	PE	-	Earth connection for motor cable shielding

Pin	Name	Type	Description
1	232TX	O	RS-232 Data Transmission.
2	232RX	I	RS-232 Data Reception.
3	GND	-	Ground return.
4	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.
5	IN2/LSP	I	5-48V digital NPN input. Positive limit switch input.
6	IN3/LSN	I	5-48V digital NPN input. Negative limit switch input.
7	I/O0	I/O	5-48V 1.5A NPN (sink) general-purpose digital programmable input IN0 or output OUT0
8	I/O1	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN1 or output OUT1
9	I/O4	I/O	5-48V 0.1A NPN (sink) general-purpose digital programmable input IN4 or output OUT4
10	IN5	I	5-48V digital NPN general-purpose input
11	GND	-	Ground return. Internally connected to other GND pins.
12	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)
13	+5V	O	Supply for all feedback sensors.

Pin	Name	Type	Description
1	GND	-	Ground return. Internally connected to other GND pins.
2	Hall1	I	Digital Hall, or Linear Hall sensor 1.
3	+5V	O	5V supply for all feedback sensors.
4	Hall2	I	Digital Hall, or Linear Hall sensor 2.
5	+5V	O	5V supply for all feedback sensors.
6	Hall3	I	Digital Hall, or Linear Hall sensor 3.
7	EncA1+/EncA1 Dt1+/Dt1	I	Encoder 1 A+ / Data+ diff. input or single-ended input. Set SW1 pin 1 for differential.
8	GND	-	Ground return.
9	EncA1-/Dt1-	I	Encoder 1 A-/Data- diff. input. Set SW1 pin 1 for differential.
10	+5V	O	5V supply for all feedback sensors.
11	EncB1+/EncB1 Clk1+/Clk1	I	Encoder 1 B+ / Clock+ diff. input or single-ended input. Set SW1 pin 2 for differential.
12	EncA2+/EncA2 Dt2+/Dt2	I	Incr. encoder 2 A / Data+ diff. input or single-ended input. Set SW1 pin 4 for differential.
13	EncB1-/Clk1-	I	Encoder 1 B- / Clock- diff. input. Set SW1 pin 2 for differential.
14	EncA2-/Dt2-	I	Incr. encoder 2 A- / Data - diff. input. Set SW1 pin 4 for differential.
15	Z1+	I	Incr. encoder 1 Z / Z+ diff. input or single-ended input. Set SW1 pin 3 for differential.
16	EncB2+/EncB2 Clk2+/Clk2	I/O	Encoder 2 B+ / Clock+ diff. input or single-ended input. Set SW2 pin1 for differential.
17	Z1-	I	Incr. encoder 1 Z- diff. input. Set SW1 pin 3 for differential.
18	EncB2-/Clk2-	I	Encoder 2 B- / Clock- diff. input. Set SW2 pin1 for differential.
19	GND	-	Ground return.
20	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.

Port	Name	Type	Description
J8	ECAT IN	I	EtherCAT standard RJ45 Ethernet IN port.
J9	ECAT OUT	O	EtherCAT standard RJ45 Ethernet OUT port.
J6#x ¹	USB	I/O	Standard Micro USB for PC data transfer

Pin	Name	Type	Description
1	STO2-	I	Safe Torque Off input 2, negative return (opto-isolated, 0V)
2	STO2+	I	Safe Torque Off input 2, positive input (opto-isolated, 18÷40V)
3	PE	-	Earth connection
4			
5	STO1+	I	Safe Torque Off input 1, positive input (opto-isolated, 18÷40V)
6	STO1-	I	Safe Torque Off input 1, negative return (opto-isolated, 0V)

Pin	Name	Type	Description
1	Rsvd	-	Reserved. Do not connect.
2	GND	-	Ground return. Internally connected to other GND pins.
3	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to all 3 drives +V _{log} pins.
4	PE	-	Earth connection

SW1#x ¹ – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncA1-/Dt1- and EncA1+/EncA1/Dt1+/Dt1 feedback pins.
2	ON = Connect an 120Ω resistor between EncB1/Clk1- and EncB1+/EncB1/Clk1+/Clk1 feedback pins.
3	ON = Connect an 120Ω resistor between Z1- and Z1+ feedback pins.
4	ON = Connect an 120Ω resistor between EncA2-/Dt2- and EncA2+/EncA2/Dt2+/Dt2 feedback pins.

SW2#x ¹ – Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncB2/Clk2- and EncB2+/EncB2/Clk2+/Clk2 feedback pins.

LEDs	
LED1, LED2, LED3	Red EtherCAT® ERROR indicator.
LED5, LED6, LED7	Green EtherCAT® RUN indicator.

¹ "x" can be drive 1, 2 or 3

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
TECHNO SOFT		Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET		N° document P020.203.E403.DSH.10D
				Page: 2 of 5



Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET

P/N: P020.203.E403

SW3 & SW4 - AxisID Selection							
SW4	SW3				Drive AxisID		
	Pin 1	Pin 2	Pin 3	Pin 4	Drive #1	Drive #2	Drive #3
off	off	off	off	off	1	2	3
off	off	off	off	on	9	10	11
off	off	off	on	off	17	18	19
off	off	off	on	on	25	26	27
off	off	on	off	off	33	34	35
off	off	on	off	on	41	42	43
off	off	on	on	off	49	50	51
off	off	on	on	on	57	58	59
off	on	off	off	off	65	66	67
off	on	off	off	on	73	74	75
off	on	off	on	off	81	82	83
off	on	off	on	on	89	90	91
off	on	on	off	off	97	98	99
off	on	on	off	on	105	106	107
off	on	on	on	off	113	114	115
off	on	on	on	on	121	122	123
on	off	off	off	off	129	130	131
on	off	off	off	on	137	138	139
on	off	off	on	off	145	146	147
on	off	off	on	on	153	154	155
on	off	on	off	off	161	162	163
on	off	on	off	on	169	170	171
on	off	on	on	off	177	178	179
on	off	on	on	on	185	186	187
on	on	off	off	off	193	194	195
on	on	off	off	on	201	202	203
on	on	off	on	off	209	210	211
on	on	off	on	on	217	218	219
on	on	on	off	off	225	226	227
on	on	on	off	on	233	234	235
on	on	on	on	off	241	242	243
on	on	on	on	on	249	250	251

Electrical characteristics

- All parameters measured under the following conditions (unless otherwise specified):
 - $V_{LOG} = 24$ VDC; $V_{MOT} = 48$ VDC; $F_{PWM} = 20$ kHz
 - Ambient temperature = 25°C (typical values) / 0°C...40°C (min/max values)
 - Supplies start-up / shutdown sequence: -any-
 - Load current = nominal
 - Data is provided for each axis of the system

Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature		0		40 ¹	°C
Ambient humidity				90	%Rh
Altitude / pressure ²					
Altitude (vs. sea level)		-0.1	0 + 2.5	2	Km
Ambient Pressure		0	0.75 ± 1	10.0	atm
Storage Conditions		Min	Typ	Max	Units
Ambient temperature		-40		100	°C
Ambient humidity				100	%Rh
Ambient Pressure		0		10.0	atm
ESD capability (Human body model)				±5	kV
Original packaging				±15	kV
Mechanical Mounting		Min	Typ	Max	Units
Airflow		natural convection, closed box			
Spacing required between adjacent drives		10			mm
Spacing required above drive		30	80		
For counter-connectors & cable bending					
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)		118.2 x 71.4 x 21.7			mm
Global size		~4.65 x 2.81 x 0.85			inch
Weight		161			g
Cleaning agents		Dry cleaning is recommended			
Protection degree		According to IEC60529 IP20			
Power dissipation		Idle ($I_{MOT} = 0A$)		1	1.2
Full power ($I_{MOT} = \text{nominal}$)				2.0	2.4
Power efficiency		Full power ($I_{MOT} = \text{nominal}$)		98.7	
Voltage efficiency		$f_{PWM} = 20KHz$		98.3	
$f_{PWM} = 100KHz$				91.4	
Surface temperature of metallic baseplate				40	°C

Logic Supply Input (+V _{LOG})		Min	Typ.	Max.	Units
Nominal values		6	24	48	V _{DC}
Supply voltage		Absolute maximum values, drive operating but outside guaranteed parameters		4.9	50
Absolute maximum values, continuous		-0.5		53	V _{DC}
Supply current		+V _{LOG} = 12V		90	150
+V _{LOG} = 24V				60	90
+V _{LOG} = 48V				45	60
Utilization category		Acc. to 60947-4-1 ($I_{PEAK} \leq 1.05 \cdot I_{NOM}$) DC-1			
Motor Supply Input (+V _{MOT})		Min	Typ.	Max.	Units
Nominal values		7		48	V _{DC}
Supply voltage		Absolute maximum values, drive operating but outside guaranteed parameters		6	50
Absolute maximum values, continuous		-0.5		53	V _{DC}
Supply current		Idle		0.3	mA
Operating				±7	±16
Voltage measurement error				±0.15	±0.25
Utilization category		Acc. to 60947-4-1 ($I_{PEAK} \leq 4.0 \cdot I_{NOM}$) DC-3			
Motor Outputs (A/A+, B/A-, C/B+, CR/B-)		Min.	Typ.	Max.	Units
Nominal current		PMSM motors sinusoidal amplitude		±8	A
PMSM motors sinusoidal RMS				5.7	A _{RMS}
DC/BLDC/STEP motors continuous				7	A
Peak current		maximum 4 seconds		-16	+16
Short-circuit protection threshold				±25	±28
Short-circuit protection delay				2.6	3.5
On-state voltage drop		Nominal output current; including typical mating connector contact resistance			50
Off-state leakage current				0.3	1
Current measurement		Accuracy (FS = Full Scale)		±1	±1.5
Noise (current ≤ 2A)				±4	±6
Noise (current ≥ 2A)				±30	±50
Offset drift (compensated @ AxisOn)				±0.16	mA/°C
Motor inductance (phase-to-phase)		Recommended value to avoid spurious short-circuit protection, triggered by ripple			
Fast loop ³ V _{MOT}		50µs 48V			
100µs 48V					133
50µs 24V					66
100µs 24V					133
Motor electrical time-constant (L/R)		Recommended value for ±5% current measurement error			
F _{PWM} = 20 kHz					330
F _{PWM} = 40 kHz					170
F _{PWM} = 60 kHz					140
F _{PWM} = 80 kHz					80
F _{PWM} = 100 kHz					66
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink)			
Default state		Input floating (wiring disconnected) Logic HIGH			
Input voltage		Logic "LOW"		1.4	1.8
Logic "HIGH"		IN0, IN1, IN4, IN5		3.1	2.5
Hysteresis				0.9	1.1
Logic "LOW"		IN2/LSP, IN3/LSN		4	3.5
Logic "HIGH"				4	3.5
Hysteresis				0.6	
Floating voltage (not connected)				4.7	
Absolute maximum, continuous		IN2/LSP, IN3/LSN, IN5		-2	+80
IN0, IN1, IN4				-0.5	V _{LOG} +0.5
Input current		Logic "LOW"; Pulled to GND		6.5	8
Logic "HIGH"; Pulled to +24V				0.2	0.4
Input frequency				0	500
Minimum pulse				1	µs
ESD protection - Human body model				±2	kV
Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V			
Default state		Input floating (Wiring disconnected)			
Input voltage		Digital		1.5	1.7
Logic "LOW"				3	2.5
Logic "HIGH"				0.5	
Hysteresis				0	0.5...4.5
Analog				4.95	
Input current		Logic "LOW"; Pull to GND		2.4	
Logic "HIGH"; Internal 2.2KΩ pull-up to +5				0	
Minimum pulse width				66	µs
ESD protection - Human body model				±15	kV

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings
² Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ Fast loop period of 50µs is not possible with all feedback device types.

Name	First edition	Document template: P099.TQT.564.0001	Last edition	Visa:
ALN	September 2, 2024		January 14, 2025	
Title of document		N° document		
TECHNO SOFT		Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET		P020.203.E403.DSH.10D Page: 3 of 5



Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET

P/N: P020.203.E403

Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance		NPN (sink) 24V			
Load type		Resistive, Inductive			
Default state	Not supplied (+V _{LOG} floating)	High-Z (floating)			
	Immediately after power-up	Logic "HIGH"			
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4			0.4	V
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
Output current	Absolute maximum, surge (duration ≤ 1s) [†]	-1		V _{LOG} +1	mA
	Logic "LOW", sink current, short duration, duty cycle ≤ 1%	5s max	OUT1, OUT4	0.1	
		0.5s max	OUT0	2	
			OUT1, OUT4	0.15	
			OUT0	2.5	
			OUT0	1.5	
Minimum pulse width	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V			0.05	mA
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V			5	
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	
		V _{LOG} =48V	0.42	0.45	
ESD protection - Human body model		±25			kV
Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 400mA ¹	5.05	5.2	5.25	V
Output current ¹	Output voltage ≥ 4.85V			1,200	mA
Short-circuit to GND protection		Yes / Drive resets at event			
Over-voltage protection		NOT protected			
ESD protection - Human body model		±1			kV
Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-)²		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave A1-, B1-, Z1-, A2-, B2- floating	TTL / CMOS / Open-collector (NPN sink)			
Single-ended threshold	A1+, B1+, Z1+, A2+, B2+	1.3	1.4	1.5	V
Single-ended input current	Input pulled to GND against on-board 2.2 KΩ pull-up to +5V		2.4	2.7	mA
Differential mode compliance	For full RS422 compliance, see ²	TIA/EIA-422-A			
Input voltage	Hysteresis	±0.03	±0.05	±0.2	V
	Differential mode	-15		+15	
	Common-mode range (A+ to GND, etc.)	-7		+12	
Input impedance, differential	Common-mode (A1+ to GND, etc.)		2.2		kΩ
	Differential (A1+ to A1-, etc.)		4.4		
Input frequency	Differential mode	0		15	MHz
Minimum pulse width	Differential mode	33			ns
ESD protection - Human body model		±30			kV
RS-232		Min.	Typ.	Max.	Units
Compliance		TIA/EIA-232-C			
Bit rate	Software selectable	9600		115200	Baud
Output voltage		±5	±5.7		V
Short-circuit	232TX to GND	Guaranteed			
Input voltage	Absolute maximum, continuous	-30		+30	V
ESD protection - Human body model		±15			kV
Absolute encoder interface:					
SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki		Min	Typ.	Max	Units
Single-ended mode	Not recommended, reduced robustness & speed				
Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Output voltage	Differential; 50Ω differential load	1.5	3.3		V
	Common-mode, referenced to GND	1	1.7	3	
CLOCK frequency	Nikon, Sanyo Denki	2.5, 4			MHz
	Panasonic, Tamagawa	2.5			
	All others	1, 2, 3, 4			
Output Short-circuit protection	Common-mode voltage ±15V	Yes, protected			
DATA format	Software selectable	Binary / Gray			
		Single-turn / Multi-turn			
		Counting direction			
		CRC type			
DATA resolution	Including CRC, flags, ...		64		Bits
If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution					

Analog Input (REF/ FDBK)		Min	Typ.	Max	Units
Input voltage	Operational range	0...5, -10...+10			
	Absolute maximum values, continuous	-22		+26	V
	Absolute maximum, surge (duration ≤ 1s)			±38	
Input impedance	To 1.44V		20	kΩ	
Bandwidth (-3dB)	Software selectable	0		5.3	kHz
Resolution			12		bits
Integral linearity				±1	bits
Offset error	Range -10V ... +10V		±3	±10	bits
	Range 0 ... +5V		±10	±30	
Gain error	Range -10V ... +10V		±0.3	±0.5	%
	Range 0 ... +5V		±0.5	±0.8	
ESD protection - Human body model		±1.5			kV
EtherCAT®		Min.	Typ.	Max.	Units
Compliance		IEEE802.3, IEC61158			
Software protocols compatibility		CoE, FoE, EoE, IEC61800-7-301			
Transmission line	According to TIA/EIA-568-5-A	5	5e	6	Category
		UTP	FTP	STP	Shield
Auto	swap + / - inside a pair	Yes (MLT3 encoding)			
	swap Rx / Tx pairs	Yes (auto-MDI/MDIX)			
Swap port0(IN) / port1(OUT)		NO (EtherCAT requirement)			
Configured Station Alias (using AxisID)		1 + 251			
ESD protection - Human body model		±5			kV
Safe Torque Off (STO) inputs		Min.	Typ.	Max.	Units
Safety Integrity Level		SIL 3			
Performance Level		PL e			
Safety Category		Cat 3			
Reaction time				30	ms
Ignored diagnostic pulses	Duration			5	ms
	Repetition rate			20	Hz
MTTFd			377		years
DC			90		%
PfH			8E-10		hours
Lifetime			20		years
V _{LOG}		External power supply SELV or PELV			
Pollution Degree				2	-
STO wiring	Cabinet / Housing	IP54			
	Bundling / Grouping	Separate wiring for STO1, STO2			
Compatibility	Shielding	Separate shield for STO1, STO2			
	Each STO channels has separate + and - terminals	PNP (source) or NPN (sink), depending on user connection			
Isolation		Each STO channel is opto-isolated			
Voltage, STOx+ to STOx-	Inactive (torque off)		0	5.6	V
	Active (motor driven)	18	24		V
	Abs. maximum, continuous	-70		+70	V
Voltage	Isolation, STO1 to STO2	±2			kV
	Isolation, STOx to GND	±2			kV
Current	STOx+ - STOx- = 24V		3	5	mA
ESD protection - Human body model		±30			kV

[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.


¹ Specified currents are intended per drive. Each drive has separate +5V outputs

² To achieve full RS-422 compatibility and enhance noise rejection, it is necessary to connect an 120Ω resistor across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-). This can be done through SW1 and SW2.


Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
TECHNO SOFT		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10D	Page: 4 of 5




Micro 4804 SY

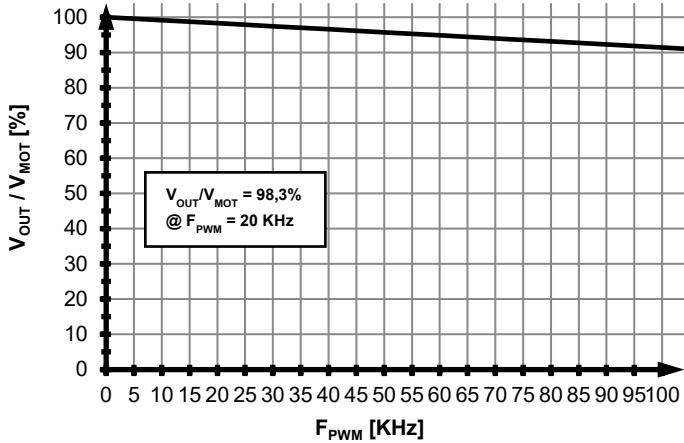


Micro 4804 SY

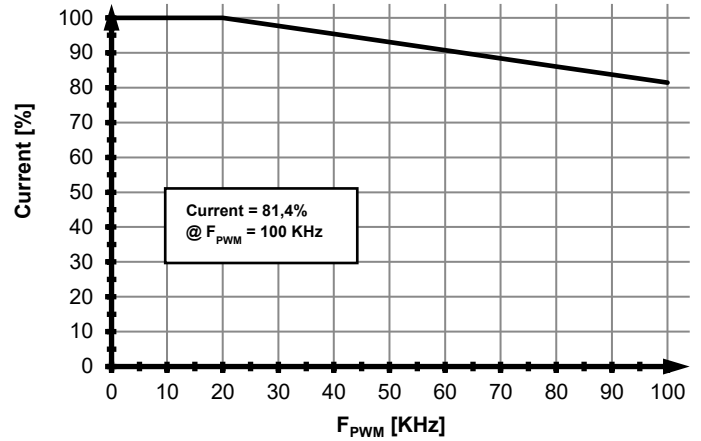


Micro 4804 SY

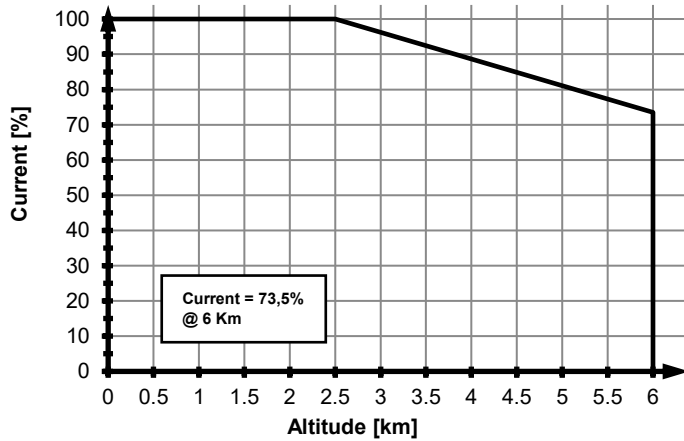

Micro 4804 SY

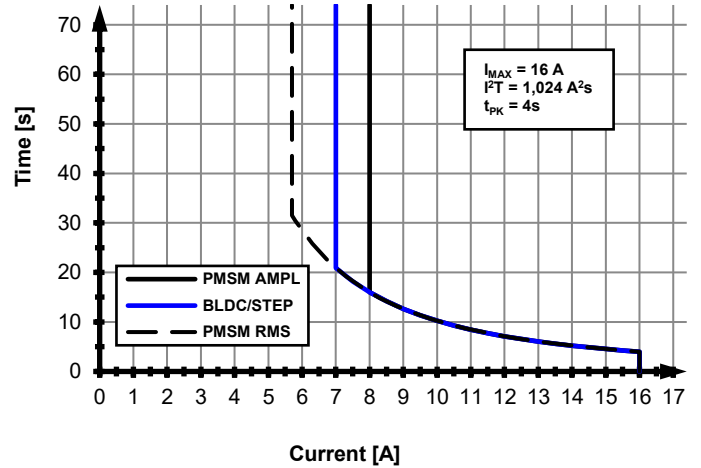

Micro 4804 SY

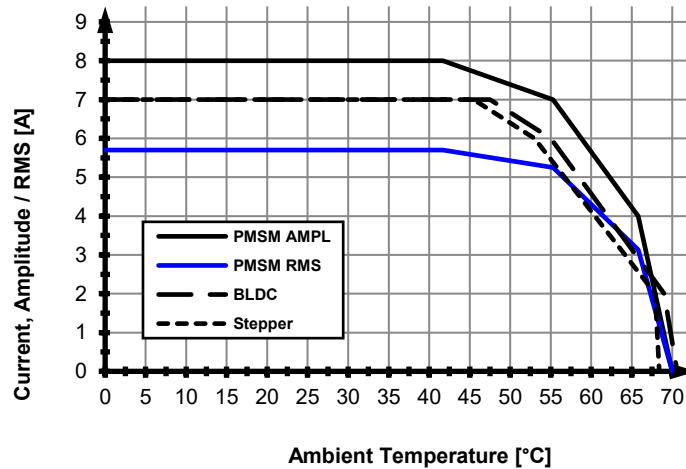

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition January 14, 2025	Visa:
TECHNOSOFT		Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET		N° document P020.203.E403.DSH.10D Page: 5 of 5