




Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET

P/N: P020.203.E403

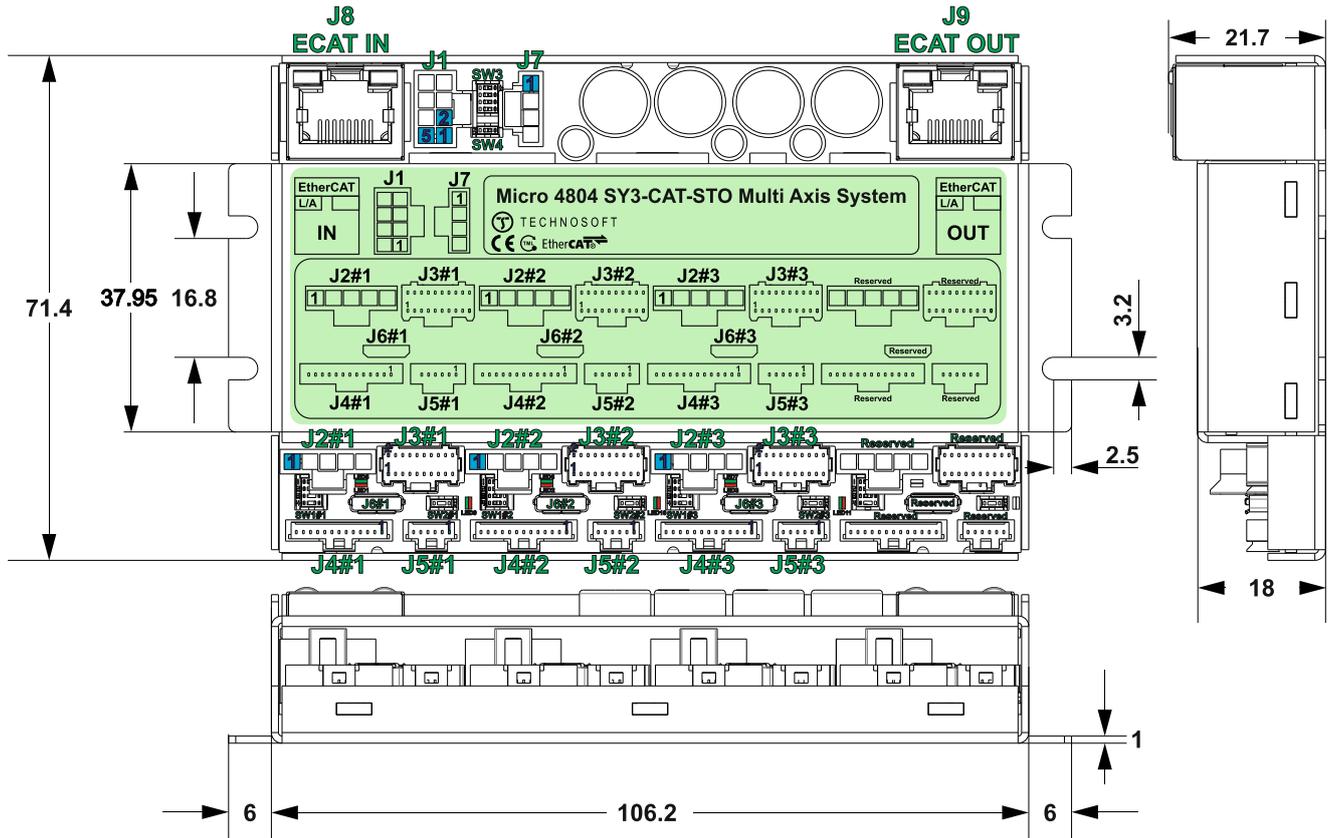

All dimensions are in mm. Drawing not to scale.

Motor – sensor configurations					
Sensor \ Motor	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	Ⓢ		Ⓢ	Ⓢ	
Incr. Encoder + Dig. Hall	Ⓢ	Ⓢ			
Linear Halls	Ⓢ				
Digital Hall control only	Ⓢ				
BISS / SSI / EnDAT / TAMAGAWA / Nikon / Sanyo Denki / Panasonic	Ⓢ	Ⓢ	Ⓢ	Ⓢ	
Tacho			Ⓢ		
Open-loop (no sensor)				Ⓢ	Ⓢ

Features

- Compact 3-axis EtherCAT motion system that integrates a motion controller and drive into a single unit, powered by MotionChip™ technology.
- Universal solution for control of rotary and linear brushless, brushed and 2 or 3-phase step motors
- Advanced motion control features, including CSP, CSV, CST, PVT, S-curve, electronic gearing, camming, and more.
- Motor supply: 48V nominal
- Motor output current per axis:
 - Nominal: 4A_{RMS} / 5.7A amplitude for PMSM motors
 - 5A for DC / BLDC / Step motors
 - Peak: 11.3A_{RMS} / 16A amplitude
- Logic supply: 24V nominal, 48V max

- Feedback Devices per axis:
 - 1 x Hall sensor interface (digital or linear)
- Feedback#1 and Feedback#2 can be:
 - Incremental encoder A / B (index Z only for Feedback #1): differential or single-ended;
 - Absolute encoder: differential or single-ended. Supported protocols: SSI, BISS, EnDAT, Tamagawa, Panasonic, Nikon, Sanyo Denki.
- Integrated termination resistors for each axis's feedback connectors, selectable via sliding switches
- 1 x analogue input per axis, 12-bit, software selectable: 0-5V or ±10V; Reference, Feedback or General purpose
- 3 x digital inputs per axis: 2 for limit switches + one general-purpose, NPN, pull-up on-board to +5V. Pull to GND to activate.
- 3 x configurable I/Os per axis, each software selectable as:
 - Digital input, NPN, with pull-up on-board to +5V. Pull to GND to activate;
 - Digital output, NPN (open-collector), with pull-up on-board to +5V. Sink current: 1 x 1.5A to drive inductive loads (such as mechanical brake), 2 x 50mA.
- EtherCAT connection: standard RJ45 ports
- Commissioning (set-up) possible through RS232, USB, FoE (File-over-EtherCAT) or EoE (Ethernet-over-EtherCAT)
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/ EN61508-3; -4/ EN ISO 13849-1.
- 24Kwords E²ROM per axis to store setup data, TML motion programs, cam tables and other user data
- 16Kwords SRAM memory per axis for data acquisition
- Operating ambient temperature: 0-40°C (over 40°C with de-rating)
- Programmable protections: any short-circuit between motor phases, GND and/or supply, over/under-voltage, over-current, I²t drive & motor, control error
- >98% voltage efficiency, >98% power efficiency

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10K	Page: 1 of 5



Micro 4804 SY3-CAT-STO Multi Axis System

DATASHEET

P/N: P020.203.E403

Mating Connectors			
Producer	Part No.	Connector	Description
Molex	1053071204	J7	1x4 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 4 circuits
Molex	1053071205	J2#x ¹	1x5 Nano-Fit, 2.5mm Pitch Nano-Fit Wire-to-Board Housing, 5 circuits
Molex	5011892010	J3#x ¹	2x10 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 20 Circuits
Molex	5013301300	J4#x ¹	1x13 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 13 Circuits
Molex	5013300600	J5#x ¹	1x6 Pico-Clasp, 1mm Pitch Pico-Clasp Wire-to-Board Housing, 6 Circuits
Molex	1053081208	J1	Nano-Fit Receptacle Housing, TPA Capable, 2.5mm Pitch, Dual Row, 8 Circuits, Black, Glow-Wire Capable
Tensility International Corp	1002333	J6#x	USB cable, Cable USB A Male - Micro B Male, 1m, shielded, black, 9.6mm plastic width
Molex	0797582140	J1, J7, J2#x ¹	Pre-Crimped wires for Nano-Fit Cable Assembly, Nano-Fit Crimp Terminal Socket to Nano-Fit Crimp Terminal Socket, 300mm
Molex	0797581019	J3#x ¹ , J4#x ¹ , J5#x ¹	Pre-Crimped wires for Pico-Clasp Cable Assembly, Pico-Clasp Crimp Terminal Socket to Pico-Clasp Crimp Terminal Socket, 300mm
Molex	1053002400	J1, J7, J2#x ¹	Pins for Nano-Fit Nano-Fit Crimp Terminal, Female, 0.76µm Gold (Au) Plating, Lubricated, 20-22AWG
Molex	5011937000	J3#x ¹ , J4#x ¹ , J5#x ¹	Pins for Pico-Clasp 1.00mm Pitch, Pico-Clasp Female Crimp Terminal, Gold Plating 0.1µm, 28-32 AWG, Reel
Molex	638275600	J1, J7, J2#x ¹	Crimp tool Nano Fit Crimp Tool, Ratchet, Molex Nano-Fit 105300 Series 20-22AWG Socket Contacts, 207129 Series
Molex	638191500	J3#x ¹ , J4#x ¹ , J5#x ¹	Crimp tool Pico-Clasp Crimp Tool, Ratchet, Molex Pico-Clasp 501193 & 501334 Series 32-28AWG Contacts

Pin	Name	Type	Description
1,2,3	+Vmot	I	Positive terminal of the motor supply: 7 to 48 V _{DC} . Internally connected to all 3 drives +V _{mot} pins.
4	PE	-	Earth connection.
5,6,7	GND	-	Ground return. Internally connected to other GND pins.
8	PE	-	Earth connection

Pin	Name	Type	Description
1	A/A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
2	B/A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
3	C/B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
4	Cr/B-	O	Chopping resistor / Phase B- for 2-ph steppers
5	PE	-	Earth connection for motor cable shielding

Pin	Name	Type	Description
1	232TX	O	RS-232 Data Transmission.
2	232RX	I	RS-232 Data Reception.
3	GND	-	Ground return.
4	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.
5	IN2/LSP	I	5-48V digital NPN input. Positive limit switch input.
6	IN3/LSN	I	5-48V digital NPN input. Negative limit switch input.
7	I/O0	I/O	5-48V 1.5A NPN (sink) general-purpose digital programmable output OUT0 or input IN0
8	I/O1	I/O	5-48V 50mA NPN (sink) general-purpose digital programmable output OUT1 or input IN1
9	I/O4	I/O	5-48V 50mA NPN (sink) general-purpose digital programmable output OUT4 or input IN4
10	IN5	I	5-48V digital NPN general-purpose input
11	GND	-	Ground return. Internally connected to other GND pins.
12	AnalogIn	I	Analog input (range software selectable 0-5V or ±10V)
13	+5V	O	Supply for all feedback sensors.

Pin	Name	Type	Description
1	GND	-	Ground return. Internally connected to other GND pins.
2	Hall1	I	Digital Hall, or Linear Hall sensor 1.
3	+5V	O	5V supply for all feedback sensors.
4	Hall2	I	Digital Hall, or Linear Hall sensor 2.
5	+5V	O	5V supply for all feedback sensors.
6	Hall3	I	Digital Hall, or Linear Hall sensor 3.
7	EncA1+/EncA1 Dt1+/Dt1	I	Encoder 1 A+ / Data+ diff. input or single-ended input. Set SW1 pin 1 for differential.
8	GND	-	Ground return.
9	EncA1-/Dt1-	I	Encoder 1 A-/Data- diff. input. Set SW1 pin 1 for differential.
10	+5V	O	5V supply for all feedback sensors.
11	EncB1+/EncB1 Clk1+/Clk1	I	Encoder 1 B+ / Clock+ diff. input or single-ended input. Set SW1 pin 2 for differential.
12	EncA2+/EncA2 Dt2+/Dt2	I	Incr. encoder 2 A / Data+ diff. input or single-ended input. Set SW1 pin 4 for differential.
13	EncB1-/Clk1-	I	Encoder 1 B- / Clock- diff. input. Set SW1 pin 2 for differential.
14	EncA2-/Dt2-	I	Incr. encoder 2 A- / Data - diff. input. Set SW1 pin 4 for differential.
15	Z1+	I	Incr. encoder 1 Z / Z+ diff. input or single-ended input. Set SW1 pin 3 for differential.
16	EncB2+/EncB2 Clk2+/Clk2	I/O	Encoder 2 B+ / Clock+ diff. input or single-ended input. Set SW2 pin1 for differential.
17	Z1-	I	Incr. encoder 1 Z- diff. input. Set SW1 pin 3 for differential.
18	EncB2-/Clk2-	I	Encoder 2 B- / Clock- diff. input. Set SW2 pin1 for differential.
19	GND	-	Ground return.
20	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to other +V _{log} pins.

Port	Name	Type	Description
J8	ECAT IN	I	EtherCAT standard RJ45 Ethernet IN port.
J9	ECAT OUT	O	EtherCAT standard RJ45 Ethernet OUT port.
J6#x ¹	USB	I/O	Standard Micro USB for PC data transfer

Pin	Name	Type	Description
1	STO2-	I	Safe Torque Off input 2, negative return (opto-isolated, 0V)
2	STO2+	I	Safe Torque Off input 2, positive input (opto-isolated, 18+40V)
3	PE	-	Earth connection
4	PE	-	Earth connection
5	STO1+	I	Safe Torque Off input 1, positive input (opto-isolated, 18+40V)
6	STO1-	I	Safe Torque Off input 1, negative return (opto-isolated, 0V)

Pin	Name	Type	Description
1	Rsvd	-	Reserved. Do not connect.
2	GND	-	Ground return. Internally connected to other GND pins.
3	+Vlog	I	Positive terminal of the logic supply input: 6 to 48 V _{DC} . Internally connected to all 3 drives +V _{log} pins.
4	PE	-	Earth connection

SW1#x ¹ - Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncA1-/Dt1- and EncA1+/EncA1/Dt1+/Dt1 feedback pins.
2	ON = Connect an 120Ω resistor between EncB1/Clk1- and EncB1+/EncB1/Clk1+/Clk1 feedback pins.
3	ON = Connect an 120Ω resistor between Z1- and Z1+ feedback pins.
4	ON = Connect an 120Ω resistor between EncA2-/Dt2- and EncA2+/EncA2/Dt2+/Dt2 feedback pins.

SW2#x ¹ - Feedback Resistors selection	
Position	Description
1	ON = Connect an 120Ω resistor between EncB2/Clk2- and EncB2+/EncB2/Clk2+/Clk2 feedback pins.

¹ "x" can be drive 1, 2 or 3

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10K	Page: 2 of 5



Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET

P/N: P020.203.E403

SW3 & SW4 - AxisID Selection							
SW4	SW3			Drive AxisID			Drive #3
	Pin 1	Pin 2	Pin 3	Pin 4	Drive #1	Drive #2	
off	off	off	off	off	1	2	3
off	off	off	off	on	9	10	11
off	off	off	on	off	17	18	19
off	off	off	on	on	25	26	27
off	off	on	off	off	33	34	35
off	off	on	off	on	41	42	43
off	off	on	on	off	49	50	51
off	off	on	on	on	57	58	59
off	on	off	off	off	65	66	67
off	on	off	off	on	73	74	75
off	on	off	on	off	81	82	83
off	on	off	on	on	89	90	91
off	on	on	off	off	97	98	99
off	on	on	off	on	105	106	107
off	on	on	on	off	113	114	115
off	on	on	on	on	121	122	123
on	off	off	off	off	129	130	131
on	off	off	off	on	137	138	139
on	off	off	on	off	145	146	147
on	off	off	on	on	153	154	155
on	off	on	off	off	161	162	163
on	off	on	off	on	169	170	171
on	off	on	on	off	177	178	179
on	off	on	on	on	185	186	187
on	on	off	off	off	193	194	195
on	on	off	off	on	201	202	203
on	on	off	on	off	209	210	211
on	on	off	on	on	217	218	219
on	on	on	off	off	225	226	227
on	on	on	off	on	233	234	235
on	on	on	on	off	241	242	243
on	on	on	on	on	249	250	251

LEDs			
LED1, LED2, LED3	RED	EtherCAT® ERROR indicator.	
LED5, LED6, LED7	GREEN	EtherCAT® RUN indicator.	
LED9 → drive #1	RED	TML ERR	Turned on when the drive detects an error condition.
LED10 → drive #2		TML RDY	Lit after power-on when the drive initialization ends. Turned off when an error occurs.
LED11 → drive #3	GREEN		

Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- $V_{LOG} = 24$ VDC; $V_{MOT} = 48$ VDC; $F_{PWM} = 20$ kHz
- Ambient temperature = 25°C (typical values) / 0°C...40°C (min/max values)
- Supplies start-up / shutdown sequence: -any-
- Load current = nominal
- Data is provided for each axis of the system

Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature		0		40 ¹	°C
Ambient humidity		Non-condensing		90	%Rh
Altitude / pressure ²	Altitude (vs. sea level)	-0.1	0 ÷ 2.5	2	Km
	Ambient Pressure	0	0.75 ÷ 1	10.0	atm
Storage Conditions		Min	Typ	Max	Units
Ambient temperature		-40		100	°C
Ambient humidity		Non-condensing		100	%Rh
Ambient Pressure				10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part			±5	kV
	Original packaging			±15	kV
Mechanical Mounting		Min	Typ	Max	Units
Airflow		natural convection, closed box, vertical			
Spacing required between adjacent drives		10			mm
Spacing required above drive		30	80		
		For counter-connectors & cable bending			

Environmental Characteristics		Min.	Typ.	Max.	Units	
Size (Length x Width x Height)	Global size	118.2 x 71.4 x 21.7			mm	
		~4.65 x 2.81 x 0.85			inch	
Weight		161			g	
Cleaning agents		Dry cleaning is recommended				
Protection degree		According to IEC60529 IP20				
Power dissipation	Idle ($I_{MOT} = 0A$)		1	1.2	W	
	Full power ($I_{MOT} = \text{nominal}$)		2.0	2.4		
Power efficiency	Full power ($I_{MOT} = \text{nominal}$)	98.7			%	
		98.3				
Voltage efficiency	$f_{PWM} = 20$ KHz	91.4			%	
	$f_{PWM} = 100$ KHz	91.4				
Surface temperature of metallic baseplate		40			°C	
Logic Supply Input (+V _{LOG})		Min	Typ.	Max.	Units	
Supply voltage	Nominal values	6	24	48	V _{DC}	
	Absolute maximum values, drive operating but outside guaranteed parameters	4.9		50		
	Absolute maximum values, continuous	-0.5		52		
Supply current	+V _{LOG} = 12V		90	150	mA	
	+V _{LOG} = 24V		60	90		
	+V _{LOG} = 48V		45	60		
Utilization category		Acc. to 60947-4-1 ($I_{PEAK} \leq 1.05 \cdot I_{NOM}$)		DC-1		
Motor Supply Input (+V _{MOT})		Min	Typ.	Max.	Units	
Supply voltage	Nominal values	7		48	V _{DC}	
	Absolute maximum values, drive operating but outside guaranteed parameters	6		50		
	Absolute maximum values, continuous	-0.5		52		
Supply current	Idle		0.3		mA	
	Operating	-16	±7	±16		
Voltage measurement error		±0.15		±0.25	V	
Utilization category		Acc. to 60947-4-1 ($I_{PEAK} \leq 4.0 \cdot I_{NOM}$)		DC-3		
Motor Outputs (A/A+, B/A-, C/B+, CR/B-)		Min.	Typ.	Max.	Units	
Nominal current	PMSM motors sinusoidal amplitude			±5.7	A _{RMS}	
	PMSM motors sinusoidal RMS			4		
	DC/BLDC/STEP motors continuous			5		
Peak current	maximum 4 seconds	-16		+16	A	
Short-circuit protection threshold				±25	A	
Short-circuit protection delay		2.6		3.5	µs	
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		50	70	mV	
Off-state leakage current				0.3	1	mA
Current measurement	Accuracy (FS = Full Scale)			±1	±1.5	%FS
	Noise (current ≤ 2A)			±4	±6	mA
	Noise (current ≥ 2A)			±30	±50	
Offset drift (compensated @ AxisOn)				±0.16		mA/°C
Motor inductance (phase-to-phase)	Recommended value to avoid spurious short-circuit protection, triggered by ripple	Fast loop ³ V_{MOT}			µH	
		50µs 48V		133		
		100µs 48V		266		
		50µs 24V		66		
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	$F_{PWM} = 20$ kHz		330	µs	
		$F_{PWM} = 40$ kHz		170		
		$F_{PWM} = 60$ kHz		140		
		$F_{PWM} = 80$ kHz		80		
				66		
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4, IN5)		Min.	Typ.	Max.	Units	
Mode compliance		NPN (sink)				
Default state		Input floating (wiring disconnected)		Logic HIGH		
Input voltage	Logic "LOW"			1.4	1.8	V
	Logic "HIGH"	IN0, IN1, IN4, IN5		3.1	2.5	
	Hysteresis			0.9	1.1	
	Logic "LOW"	IN2/LSP, IN3/LSN			1.4	
	Logic "HIGH"			4	3.5	
	Hysteresis			0.6		
	Floating voltage (not connected)			4.7		
Absolute maximum, continuous	IN2/LSP, IN3/LSN, IN5			-2	+80	
	IN0, IN1, IN4			-0.5	$V_{LOG} + 0.5$	
Input current	Logic "LOW"; Pulled to GND			6.5	8	mA
	Logic "HIGH"; Pulled to +24V			0.2	0.4	
Input frequency				0	500	kHz
Minimum pulse				1		µs
ESD protection - Human body model				±2		kV

¹ Operating temperature at higher temperatures is possible with reduced current and power ratings
² Micro 4804 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ Fast loop period of 50µs is not possible with all feedback device types.

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10K	Page: 3 of 5



Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET P/N: P020.203.E403

Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance	TTL / CMOS / Open-collector (NPN sink), or analog (linear) 0...5V				
Default state	Input floating (Wiring disconnected)	4.5	4.8	5.2	V
Input voltage	Digital		1.5	1.7	
	Logic "LOW"	3	2.5		
	Logic "HIGH"		0.5	4.95	
	Hysteresis				
	Analog	0	0.5...4.5	4.95	
Input current	Logic "LOW"; Pull to GND		2.4		mA
	Logic "HIGH"; Internal 2.2KΩ pull-up to +5		0		
Minimum pulse width			66		μs
ESD protection - Human body model			±15		kV
Digital Outputs (OUT0, OUT1, OUT4)		Min.	Typ.	Max.	Units
Mode compliance			NPN (sink) 24V		
Load type			Resistive, Inductive		
Default state	Not supplied (+V _{LOG} floating)		High-Z (floating)		
	Immediately after power-up		Logic "HIGH"		
Output voltage	Logic "LOW"; output current = 1.5A for OUT0/ 0.05A for OUT1, OUT4			0.4	V
	Logic "HIGH"; output current = 0, no load	4	4.7	5.2	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous (free-wheeling diodes to +V _{LOG} to GND)	-0.5		V _{LOG} +0.5	
	Absolute maximum, surge (duration ≤ 1s) †	-1		V _{LOG} +1	
Output current	Logic "LOW", sink current, short duration, duty cycle ≤ 1%			0.1	A
		5s max	OUT1, OUT4	2	
		0.5s max	OUT1, OUT4	0.15	
			OUT0	2.5	
	Logic "LOW", sink current, continuous; V _{OUT} ≤ 0.4V		OUT1, OUT4	0.05	
			OUT0	1.5	
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V			5	
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V	V _{LOG} =24V	0.18	0.2	mA
		V _{LOG} =48V	0.42	0.45	
Minimum pulse width		0.5			μs
ESD protection - Human body model		±25			kV
Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 400mA ¹	5.05	5.2	5.25	V
Output current ¹	Output voltage ≥ 4.85V			1,200	mA
Short-circuit to GND protection	Yes / Drive resets at event				
Over-voltage protection	NOT protected				
ESD protection	Human body model	±1			kV
Encoder Inputs (A1+, A1-, B1+, B1-, Z1+, Z1-, A2+, A2-, B2+, B2-) ²		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave A1-, B1-, Z1-, A2-, B2- floating	TTL / CMOS / Open-collector (NPN sink)			
Single-ended threshold	A1+, B1+, Z1+, A2+, B2+	1.3	1.4	1.5	V
Single-ended input current	Input pulled to GND against on-board 2.2 KΩ pull-up to +5V		2.4	2.7	mA
Differential mode compliance	For full RS422 compliance, see ²	TIA/EIA-422-A			
Input voltage	Hysteresis	±0.03	±0.05	±0.2	V
	Differential mode	-15		+15	
	Common-mode range (A+ to GND, etc.)	-7		+12	
Input impedance, differential	Common-mode (A1+ to GND, etc.)		2.2		kΩ
	Differential (A1+ to A1-, etc.)		4.4		
Input frequency	Differential mode	0		15	MHz
Minimum pulse width	Differential mode	33			ns
ESD protection	Human body model	±30			kV
RS-232		Min.	Typ.	Max.	Units
Compliance		TIA/EIA-232-C			
Bit rate	Default	9600			Baud
	Software selectable	9600		115200	
Output voltage		±5	±5.7		V
Short-circuit	232TX to GND	Guaranteed			
Input voltage	Absolute maximum, continuous	-30		+30	V
ESD protection	Human body model	±15			kV

Absolute encoder interface: SSI, BISS-C, EnDAT, Tamagawa, Nikon, Sanyo Denki		Min	Typ.	Max	Units
Single-ended mode	Not recommended, reduced robustness & speed				
Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Output voltage	Differential: 50Ω differential load	1.5	3.3		V
	Common-mode, referenced to GND	1	1.7	3	
CLOCK frequency	Nikon, Sanyo Denki	2.5, 4			MHz
	Panasonic, Tamagawa	2.5			
	All others	1, 2, 3, 4			
Output Short-circuit protection	Common-mode voltage ±15V	Yes, protected			
DATA format	Software selectable	Binary / Gray			
		Single-turn / Multi-turn			
		Counting direction			
		CRC type			
DATA resolution	Including CRC, flags, ...		64	Bits	
	If total resolution >31 bits, some bits must be ignored by software setting to achieve a max. 31 bits resolution				

Analog Input (REF/ FDBK)		Min	Typ.	Max	Units
Input voltage	Operational range	0...5, -10...+10			V
	Absolute maximum values, continuous	-22		+26	
	Absolute maximum, surge (duration ≤ 1s)			±38	
Input impedance	To 1.44V		20		kΩ
Bandwidth (-3dB)	Software selectable	0		5.3	kHz
Resolution		12			bits
Integral linearity			±1		bits
Offset error	Range -10V ... +10V		±10	±30	mV
	Range 0 ... +5V		±15	±40	
Gain error	Range -10V ... +10V		±30	±50	mV
	Range 0 ... +5V		±25	±40	
ESD protection	Human body model	±1.5			kV

EtherCAT®		Min.	Typ.	Max.	Units
Compliance		IEEE802.3, IEC61158			
Software protocols compatibility		CoE, FoE, EoE, IEC61800-7-301			
Transmission line	According to TIA/EIA-568-5-A	5	5e	6	Category
		UTP	FTP	STP	Shield
Auto	swap + / - inside a pair	Yes (MLT3 encoding)			
	swap Rx / Tx pairs	Yes (auto-MDI/MDIX)			
	Swap port0(IN) / port1(OUT)	NO (EtherCAT requirement)			
Configured Station Alias (using AxisID)		1 + 251			
ESD protection	Human body model	±5			kV

Safe Torque Off (STO) Inputs		Min.	Typ.	Max.	Units
Safety Integrity Level		SIL 3			
Performance Level		PL e			
Safety Category		Cat 3			
Reaction time				30	ms
Ignored diagnostic pulses	Duration			5	ms
	Repetition rate			20	Hz
MTTFd			377		years
DC			90		%
PFH			8E-10		hours
Lifetime			20		years
V _{LOG}	External power supply	SELV or PELV			
Pollution Degree	Cabinet / Housing	IP54		2	-
STO wiring	Bundling / Grouping	Separate wiring for STO1, STO2			
	Shielding	Separate shield for STO1, STO2			
Compatibility	Each STO channels has separate + and - terminals	PNP (source) or NPN (sink), depending on user connection			
Isolation		Each STO channel is opto-isolated			
Voltage, STOx+ to STOx-	Inactive (torque off)	0	5.6		V
	Active (motor driven)	18	24		V
	Abs. maximum, continuous	-70		+70	V
Voltage	Isolation, STO1 to STO2	±2			kV
	Isolation, STOx to GND	±2			kV
Current	STOx+ - STOx- = 24V	3	5		mA
ESD protection	Human body model	±30			kV

† Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

¹ Specified currents are intended per drive. Each drive has separate +5V outputs


² To achieve full RS-422 compatibility and enhance noise rejection, it is necessary to connect an 120Ω resistor across each signal pair (A1+/A1-, B1+/B1-, Z1+/Z1-, A2+/A2-, B2+/B2-). This can be done through SW1 and SW2.

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10K	Page: 4 of 5




Micro 4804 SY3-CAT-STO Multi Axis System DATASHEET P/N: P020.203.E403


Micro 4804 SY

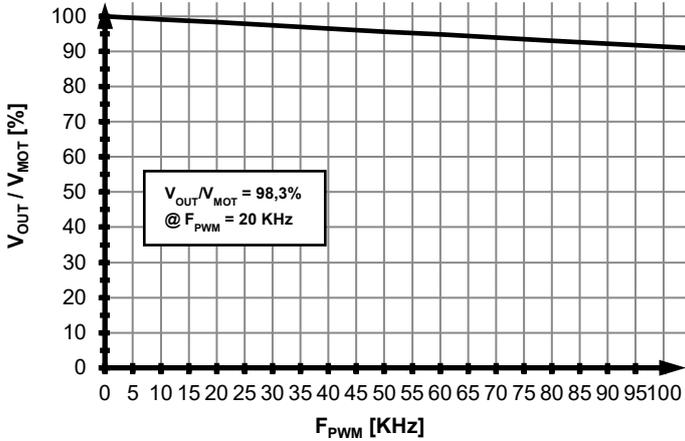


Micro 4804 SY

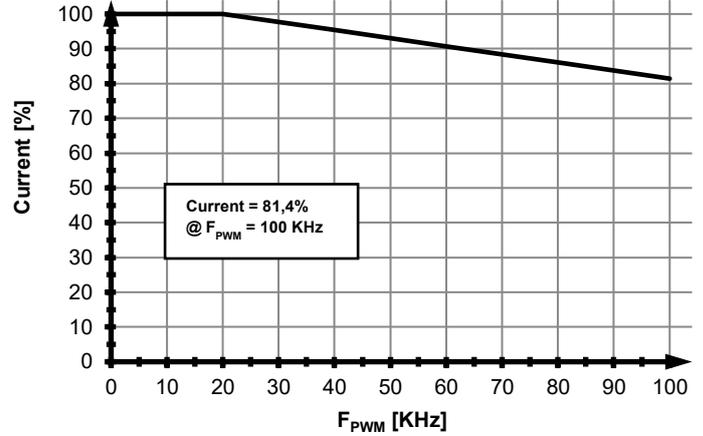


Micro 4804 SY

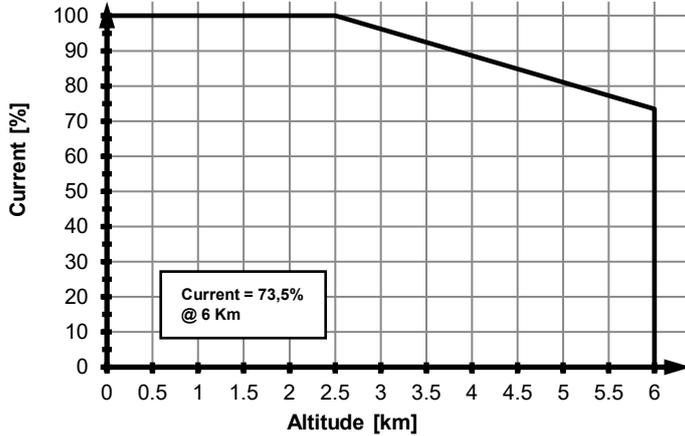

Micro 4804 SY

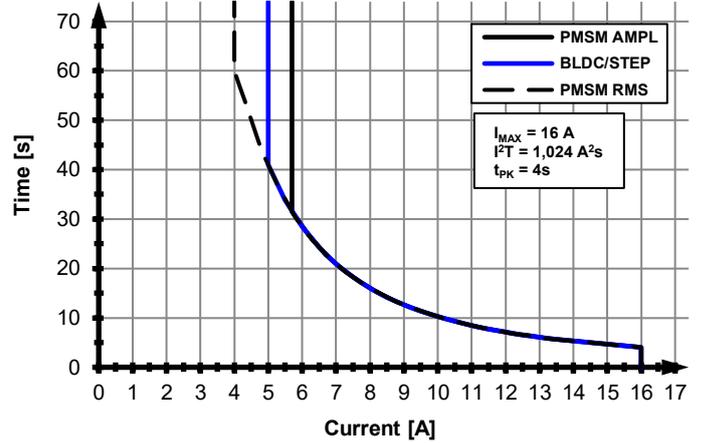

Micro 4804 SY

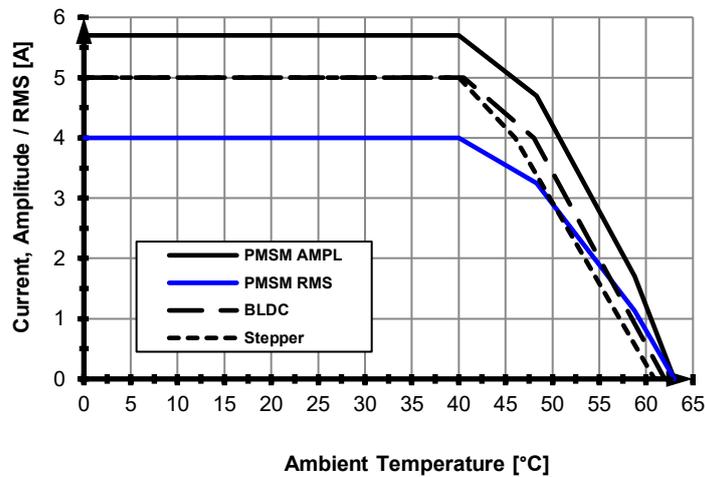

Name ALN	First edition September 2, 2024	Document template: P099.TQT.564.0001	Last edition February 24, 2026	Visa: AS
TECHNO SOFT		Title of document Micro 4804 SY3-CAT-STO Multi Axis System PRODUCT DATA SHEET	N° document P020.203.E403.DSH.10K Page: 5 of 5	