


# iPOS4808 BX-CAT-STO DATASHEET

P/N: P027.314.E221

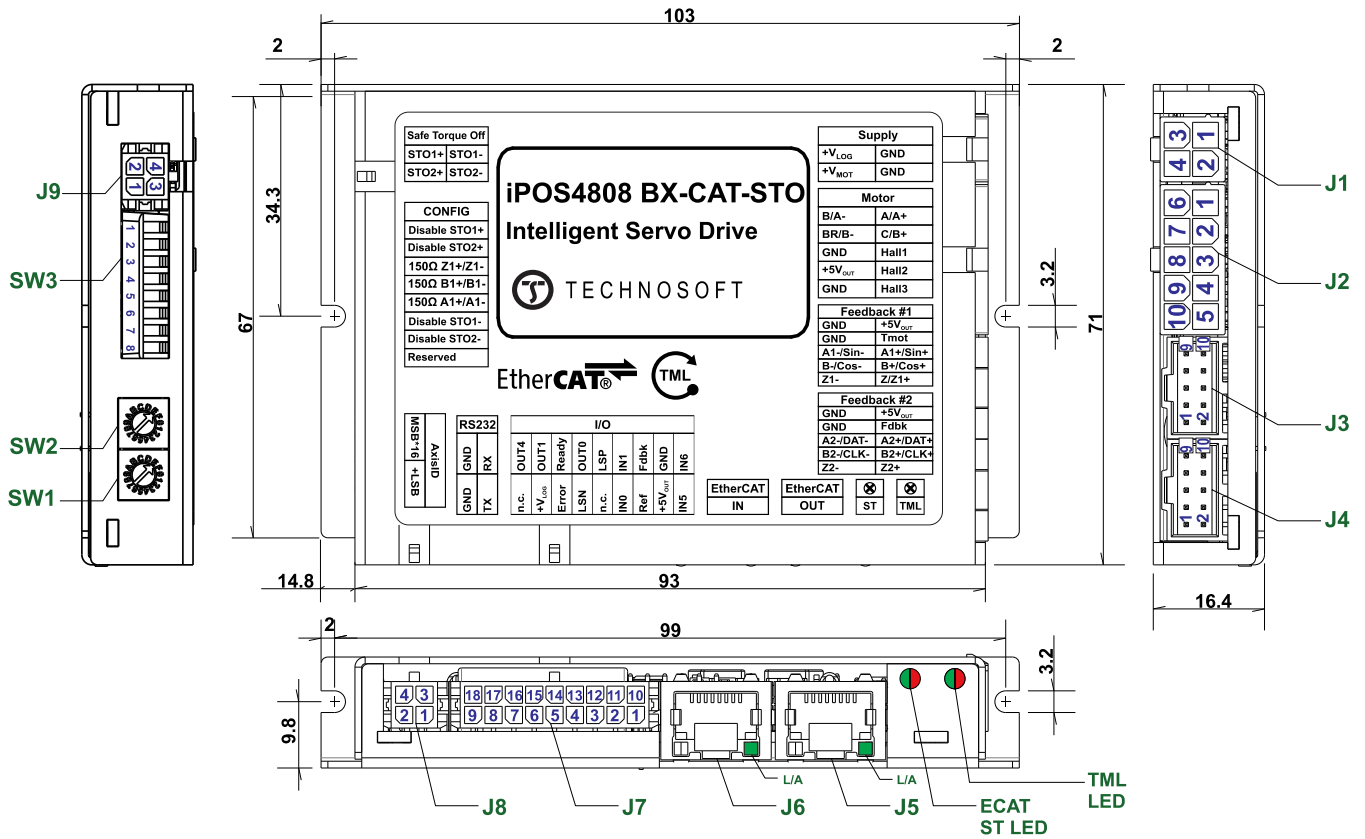

All dimensions are in mm; Drawing not to scale.

Motor – sensor configurations					
Sensor	Motor				
	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP <sup>2</sup> (3-ph)
Incr. Encoder	☑		☑	☑	☑
Incr. Encoder + Hall	☑	☑			
Analog Sin/Cos	☑	☑	☑	☑	☑
SSI	☑	☑	☑	☑	☑
BiSS-C	☑	☑	☑	☑	☑
EnDAT <sup>1</sup>	☑	☑	☑	☑	☑
Linear Halls <sup>3</sup>	☑				
Tacho			☑		
Open-loop (no sensor)				☑	☑

<sup>1</sup> Available starting with F515K firmware version

<sup>2</sup> Sensor used only for step loss detection

<sup>3</sup> For more details, please contact Technosoft

- **Features**
- Motor supply: 11-50V. Logic supply: 9-36V
- Output current: 8A cont. (BLDC mode); 20A<sub>PEAK</sub>, up to 100KHz PWM
- Feedback Devices (dual-loop support)
- 1<sup>st</sup> feedback devices supported:
  - Incremental encoder interface (single ended or differential)
  - pulse & direction interface (single ended) for external (master) digital reference
  - Analogue sin/cos encoder interface (differential 1V<sub>pp</sub>)
  - Digital Hall sensor interface (single-ended and open collector)
- 2<sup>nd</sup> feedback devices supported:
  - Incremental encoder interface (differential)
  - pulse & direction interface (differential) for external (master) digital reference
  - SSI/BISS-C/EnDAT<sup>1</sup> encoder interface
- STO: 2 safe torque-off inputs, safety integrity level (SIL3/Cat3/PLe) acc. to EN61800-5-1; -2/ EN61508-3; -4/ EN ISO 13849-1.
- 6 digital inputs, 12-36V, PNP/NPN programmable: 2 for limit switches, 4 general-purpose
- 5 digital outputs, 5-36V, 0.5A, NPN open-collector: Ready, Error, 3 general-purpose
- 2 analogue inputs: 12-bit, 0-5V: Reference, Feedback or general purpose
- RS-232 serial & dual 100Mbps RJ45 EtherCAT® interfaces
- EtherCAT® with CAN application protocol over EtherCAT (CoE)
- 127 h/w addresses selectable by h/w rotary hex switches
- 16k x 16 SRAM memory for data acquisition
- 16k x 16 E<sup>2</sup>ROM to store setup data, TML motion programs, cam tables and other user data
- Operating ambient temperature: 0-40°C (over 40°C with derating)
- NTC/PTC analogue Motor Temperature sensor input

Name EP	First edition January 19, 2018	Document template: P099.TQT.564.0001	Last edition May 25, 2022	Visa : AN
		Title of document <b>iPOS4808 BX-CAT-STO PRODUCT DATA SHEET</b>	N° document <b>P027.314.E221.DSH.10B</b>	
			Page: 1 of 5	

# iPOS4808 BX-CAT-STO DATASHEET

## P/N: P027.314.E221

Mating Connectors				
Producer	Part No.	Connector	Description	Wire Gauge
MOLEX	39-03-9042	J1	MINIFIT JR. receptacle housing, 2x2 way	AWG 18...20
MOLEX	39-03-9102	J2	MINIFIT JR. receptacle housing, 2x5 way	AWG 18...20
MOLEX	45750-1111	J1, J2	CRIMP PIN, MINIFIT JR., 13A	AWG 18...20
MOLEX	90142-0010	J3, J4	C-Grid III™ Crimp Housing Dual Row, 10 Circuits, with retention	AWG 22...24
	90143-0010		C-Grid III™ Crimp Housing Dual Row, 10 Circuits, without retention	
MOLEX	90119-0109	J3, J4	C-Grid III™ Crimp Terminal	AWG 22...24
MOLEX	43025-1800	J7	MICROFIT RECEPTACLE HOUSING, 2x9 WAY	AWG 20...24
MOLEX	43025-0400	J8, J9	MICROFIT RECEPTACLE HOUSING, 2x2 WAY	AWG 20...24
MOLEX	43030-0007	J7, J8, J9	CRIMP PIN, MICROFIT, 5A	AWG 20...24
-	-	J5, J6	Standard 8P8C modular jack (RJ-45) male	-

### Connectors Description

Pin	Name	Type	Description
J1	1	GND	- Negative return (ground) of the power supply
	2	GND	- Negative return (ground) of the power supply
	3	+V <sub>LOG</sub>	I Positive terminal of the logic supply input: 9 to 36V <sub>DC</sub>
	4	+V <sub>MOT</sub>	I Positive terminal of the motor supply: 11 to 50V <sub>DC</sub> .


Pin	Name	Type	Description
J2	1	A/A+	O Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
	2	C/B+	O Phase C for 3-ph motors, B+ for 2-ph steppers
	3	Hall 1	I Digital input Hall 1 sensor
	4	Hall 2	I Digital input Hall 2 sensor
	5	Hall 3	I Digital input Hall 3 sensor
	6	B/A-	O Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
	7	BR/B-	O Brake resistor / Phase B- for step motors
	8	GND	- Negative return (ground) of the motor supply
	9	+5V <sub>OUT</sub>	O 5V output supply - internally generated
	10	GND	- Negative return (ground) of the motor supply

Pin	Name	Type	Description
J3	1	Z1-	I Incr. encoder1 Z- diff. input
	2	Z1+	I Incr. encoder1 Z single-ended, or Z+ diff. input
	3	B1-/Cos-	I Incr. encoder1 B- diff. input, or analogue encoder Cos- diff. input
	4	B1+/Cos+/Dir	I Incr. encoder1 B single-ended, or B+ diff. input, or Dir, or analogue encoder Cos+ diff. input
	5	A1-/Sin-	I Incr. encoder1 A- diff. input, or analogue encoder Sin- diff. input
	6	A1+/Sin+/Pulse	I Incr. encoder1 A single-ended, or A+ diff. input, or Pulse, or analogue encoder Sin+ diff. input
	7	GND	- Return ground for sensors supply
	8	Temp Mot	I NTC/PTC input. Used to read an analog temperature value
	9	GND	- Return ground for sensors supply
	10	+5V <sub>OUT</sub>	O 5V output supply for I/O usage

Pin	Name	Type	Description
J4	1	Z2-	I Incr. encoder2 Z- diff. input; has 150Ω resistor between pins 1 and 2
	2	Z2+	I Incr. encoder2 Z+ diff. input; has 150Ω resistor between pins 1 and 2
	3	B2-/Dir-/CLK-/MA-	I/O Incr. encoder2 B- diff. input, or Dir-, or Clock- for SSI & EnDAT, or Master- for BiSS; has 150Ω resistor between pins 3 and 4
	4	B2+/Dir+/CLK+/MA+	I/O Incr. encoder2 B+ diff. input, or Dir+, or Clock+ for SSI & EnDAT, or Slave+ for BiSS; has 150Ω resistor between pins 3 and 4
	5	A2-/Pulse-/Data-/SL-	I Incr. encoder2 A- diff. input, or Pulse-, or Data- for SSI & EnDAT, or Slave- for BiSS; has 150Ω resistor between pins 5 and 6
	6	A2+/Pulse+/Data+/SL+	I Incr. encoder2 A+ diff. input, or Pulse+, or Data+ for SSI & EnDAT, or Slave+ for BiSS; has 150Ω resistor between pins 5 and 6
	7	GND	- Return ground for sensors supply
	8	FDBK	I Analogue input, 12-bit, 0-5V. Used to read an analogue position or speed feedback (as tacho), or used as general purpose analogue input; Also connected to J7 pin12.
	9	GND	- Return ground for sensors supply
	10	+5V <sub>OUT</sub>	O 5V output supply for sensors usage

Port	Name	Type	Description
J5	ECAT OUT	O	EtherCAT standard RJ45 Ethernet OUT port
J6	ECAT IN	I	EtherCAT standard RJ45 Ethernet IN port

Pin	Name	Type	Description
J7	1	IN5	I 12-36V general-purpose digital PNP/NPN input
	2	+5V <sub>OUT</sub>	O 5V output supply for I/O usage
	3	REF	I Analogue input, 12-bit, 0-5V. Used to read an analog position, speed or torque reference, or used as general purpose analogue input
	4	IN0	I 12-36V general-purpose digital PNP/NPN input
	5	n.c.	- not connected
	6	IN3/LSN	I 12-36V digital PNP/NPN input. Negative limit switch input
	7	OUT2/Error	O 5-36V 0.5A, drive Error output, active low, NPN open-collector/TTL pull-up. Also drives the red Error LED.
	8	+V <sub>LOG</sub>	I Positive terminal of the logic supply: 9 to 36V <sub>DC</sub>
	9	n.c.	- not connected
	10	IN6	I 12-36V general-purpose digital PNP/NPN input
	11	GND	- Return ground for I/O pins
	12	FDBK	I Analogue input, 12-bit, 0-5V. Used to read an analogue position or speed feedback (as tacho), or used as general purpose analogue input; Connected also to J4 pin 8.
	13	IN1	I 12-36V general-purpose digital PNP/NPN input
	14	IN2/LSP	I 12-36V digital PNP/NPN input. Positive limit switch input
	15	OUT0	O 5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up
	16	OUT3/Ready	O 5-36V 0.5A, drive Ready output, active low, NPN open-collector/TTL pull-up. Also drives the green Ready LED.
	17	OUT1	O 5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up
	18	OUT4	O 5-36V 0.5A, general-purpose digital output, NPN open-collector/TTL pull-up

Name EP	First edition January 19, 2018	Document template: P099.TQT.564.0001	Last edition May 25, 2022	Visa : AN
 <b>TECHNOSOFT</b>		<b>iPOS4808 BX-CAT-STO</b> <b>PRODUCT DATA SHEET</b>		N° document <b>P027.314.E221.DSH.10B</b>  Page: 2 of 5

# iPOS4808 BX-CAT-STO DATASHEET

P/N: P027.314.E221

Pin	Name	Type	Description
1	232TX	O	RS-232 Data Transmission
2	GND	-	Return ground for RS-232 pins
3	232RX	I	RS-232 Data Reception
4	GND	-	Return ground for RS-232 pins

Pin	Name	Type	Description
1	STO2+	I	Safe Torque Off input 2, positive input (opto-isolated, 18+40V)
2	STO1+	I	Safe Torque Off input 1, positive input (opto-isolated, 18+40V)
3	STO2-	I	Safe Torque Off input 2, negative return(opto-isolated, 18+40V)
4	STO1-	I	Safe Torque Off input 1, negative return(opto-isolated, 18+40V)

SW1 & SW2 Axis ID selection switches		
Switch	Position	Description
SW1	0..F	H/W Axis ID = SW2(MSB)*16 + SW1(LSB) Exception: SW2=0 and SW1 = 0 -->Axis ID = 255.
SW2	0..7	Remark:SW2 should be set only between 0 and 7.

SW3 HW Configuration selection DIP switch		
Pin	Position	Description
1	down(ON)	Disable STO1+ function. Connects internally +V <sub>LOG</sub> to STO1+
2	down(ON)	Disable STO2+ function. Connects internally +V <sub>LOG</sub> to STO2+
3	down(ON)	Connect an 150Ω resistor between Z1+ and Z1- feedback pins
4	down(ON)	Connect an 150Ω resistor between B1+ and B1- feedback pins
5	down(ON)	Connect an 150Ω resistor between A1+ and A1- feedback pins
6	down(ON)	Disable STO1- function. Connects internally GND to STO1-
7	down(ON)	Disable STO2- function. Connects internally GND to STO2-
8	down(ON)	Reserved

## Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- V<sub>LOG</sub> = 24 VDC; V<sub>MOT</sub> = 48VDC
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude / continuous BLDC, DC, stepper) = 8A


Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature		0		40 <sup>1,3</sup>	°C
Ambient humidity	Non-condensing	0		90	%Rh
Altitude / pressure <sup>2</sup>	Altitude (vs. sea level)	-0.1	0 ± 2.5	<sup>2</sup>	Km
	Ambient Pressure	0 <sup>2</sup>	0.75 ± 1	10.0	atm
Storage Conditions		Min.	Typ.	Max.	Units
Ambient temperature		-40		105	°C
Ambient humidity	Non-condensing	0		100	%Rh
Ambient Pressure		0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part			±0.5	kV
	Original packaging			±15	kV
Mechanical Mounting		Min.	Typ.	Max.	Units
Airflow		natural convection <sup>3</sup> , closed box			
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)	Without mating connectors	103 x 71 x 16.4			mm
	With recommended mating connectors.	~4.06 x 2.8 x 0.65			inch
Weight	Without mating connectors	109 x 79 x 19.5			mm
	With recommended mating connectors.	~4.3 x 3.1 x 0.77			inch
Power dissipation	Idle (no load)	125			g
	Operating	3.4			W
Efficiency		8.5			%
Cleaning agents	Dry cleaning is recommended	Only Water- or Alcohol- based			
Protection degree	According to IEC60529, UL508	IP20			-

Logic Supply Input (+V <sub>LOG</sub> )		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	9		36	V <sub>DC</sub>
	Absolute maximum values, drive operating but outside guaranteed parameters	8		40	V <sub>DC</sub>
	Absolute maximum values, surge (duration ≤ 10ms) <sup>†</sup>	-1		+45	V
Supply current	No Load on Digital Outputs	+V <sub>LOG</sub> = 9V		400	mA
		+V <sub>LOG</sub> = 12V		300	
		+V <sub>LOG</sub> = 24V		150	
		+V <sub>LOG</sub> = 39V		90	
Motor Supply Input (+V <sub>MOT</sub> )		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	11		50	V <sub>DC</sub>
	Absolute maximum values, drive operating but outside guaranteed parameters	9		52	V <sub>DC</sub>
	Absolute maximum values, continuous	-0.6		54	V <sub>DC</sub>
Supply current	Absolute maximum values, surge (duration ≤ 10ms) <sup>†</sup>	-1		+57	V
	Idle		1	5	mA
	Operating	-20	±8	+20	A
Motor Outputs (A/A+, B/A-, C/B+, BR/B-)	Absolute maximum value, short-circuit condition (duration ≤ 10ms) <sup>†</sup>			26	A
	Nominal output current, continuous <sup>4</sup>			8	A
Motor output current, peak	for DC brushed, steppers and BLDC motors with Hall-based trapezoidal control for PMSM motors with FOC sinusoidal control (sinusoidal amplitude value) for PMSM motors with FOC sinusoidal control (sinusoidal effective value)	-20		+20	A
Short-circuit protection threshold		±22	±26	±30	A
Short-circuit protection delay		5	10		µs
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		±0.3	±0.5	V
Off-state leakage current			±0.5	±1	mA
Motor inductance (phase-to-phase)	Recommended value, for current ripple max. ±5% of full range; +V <sub>MOT</sub> = 36 V	F <sub>PWM</sub>			µH
		20 kHz	330		
		40 kHz	150		
		60 kHz	120		
		80 kHz	80		
		100 kHz	60		
Motor electrical time-constant (L/R)	Minimum value, limited by short-circuit protection; +V <sub>MOT</sub> = 36 V	20 kHz	120		µH
		60 kHz	40		
		40 kHz	30		
		80 kHz	15		
		100 kHz	8		
		20 kHz	250		
Current measurement	Recommended value for ±5% current measurement error	40 kHz	125		µs
		60 kHz	100		
		80 kHz	63		
		100 kHz	50		
Current measurement	FS = Full Scale accuracy		±4	±8	%FS

<sup>1</sup> Operating temperature at higher temperatures is possible with reduced current and power ratings  
<sup>2</sup> iPOS4808 can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

<sup>3</sup> In case of forced cooling (conduction or ventilation) the maximum ambient temperature can be increased substantially.

<sup>4</sup> @20KHz F<sub>PWM</sub>

Name	First edition	Document template: P099.TQT.564.0001	Last edition	Visa :
EP	January 19, 2018		May 25, 2022	AN
 <b>TECHNOSOFT</b>		Title of document	N° document	
		<b>iPOS4808 BX-CAT-STO</b>	<b>P027.314.E221.DSH.10B</b>	
		<b>PRODUCT DATA SHEET</b>		Page: 3 of 5

# iPOS4808 BX-CAT-STO DATASHEET

P/N: P027.314.E221

Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN5, IN6) <sup>1</sup>		Min.	Typ.	Max.	Units
Mode compliance		PNP			
Default state	Input floating (wiring disconnected)	Logic LOW			
Input voltage	Logic "LOW"	-36	0	2.4	V
	Logic "HIGH"	7.5	24	36	
	Hysteresis	1.2	2.4	2.8	
	Floating voltage (not connected)		0		
	Absolute maximum, continuous	-36		+39	
Input current	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>	-50		+50	mA
	Logic "LOW"; pulled to GND		0		
	Logic "HIGH"; pulled to +24V		3.6	4	
Input frequency		0		10	kHz
Minimum pulse width		6			μs
ESD protection	Human body model	±5			kV


Mode compliance		NPN			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		0	1.6	V
	Logic "HIGH"	1.8	24	39	
	Hysteresis	1.2	2.4	2.8	
	Floating voltage (not connected)		15		
	Absolute maximum, continuous	-10		+39	
Input current	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>	-40		+40	mA
	Logic "LOW"; Pulled to GND		2	2.2	
	Logic "HIGH"; Internal 12KΩ pull-up to +V <sub>LOG</sub>	0	0	0	
Input frequency		0		10	kHz
Minimum pulse width		6			μs
ESD protection	Human body model	±5			kV

Digital Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		0	0.8	V
	Logic "HIGH"	2	5		
	Floating voltage (not connected)		4.4		
	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>	-10		+15	
Input current	Logic "LOW"; Pull to GND			5	mA
	Logic "HIGH"; Internal 1KΩ pull-up to +5	0	0	0	
Minimum pulse width		2			μs
ESD protection	Human body model	±5			kV
Encoder2 Inputs (A2+/Data+, A2-/Data-, B2+/Clk+, B2-/Clk-, Z2+, Z2-)		Min.	Typ.	Max.	Units
Differential mode compliance		TIA/EIA-422-A			
Input voltage	Hysteresis	±0.06	±0.1	±0.2	V
	Differential mode	-14		+14	
	Common-mode range (A+ to GND, etc.)	-11		+14	
Input impedance, differential	A2+, B2+, Z2+ A2-, B2-, Z2-		150		Ω
Input frequency	Differential mode	0		10	MHz
Minimum pulse width	Differential mode	50			ns

Digital Outputs (OUT0, OUT1, OUT2/Error, OUT3/ Ready, OUT4)		Min.	Typ.	Max.	Units
Mode compliance	All outputs (OUT0, OUT1, OUT2/Error, OUT3/Ready)	TTL / open-collector / NPN 24V			
Default state	Not supplied (+V <sub>LOG</sub> floating or to GND)	High-Z (floating)			
	Immediately after power-up	OUT0, OUT1, OUT4	Logic "HIGH"		
		OUT2/Error, OUT3/ Ready	Logic "LOW"		
Output voltage	Normal operation	OUT0, OUT1, OUT2/Error	Logic "HIGH"		
		OUT3/Ready	Logic "LOW"		
	Logic "LOW"; output current = 0.5A			0.8	V
	Logic "HIGH"; output current = 0, no load	2.9	3	3.3	
		4	4.5	5	
Logic "HIGH", external load to +V <sub>LOG</sub>		V <sub>LOG</sub>			
Absolute maximum, continuous	-0.5		V <sub>LOG</sub> +0.5		
Output current	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>			V <sub>LOG</sub> +1	mA
				0.5	
	Logic "LOW", sink current			1	
	Logic "LOW", sink current, pulse ≤ 5 sec.			2	
	Logic "HIGH", source current; external load to GND; V <sub>OUT</sub> ≥ 2.0V			4	
Minimum pulse width	Logic "HIGH", leakage current; external load to +V <sub>LOG</sub> ; V <sub>OUT</sub> = V <sub>LOG</sub> max = 40V		0.1	0.2	mA
		2			
ESD protection	Human body model	±15			kV
Encoder1 Inputs (A1/A1+, A1-, B1/B1+, B1-, Z1/Z1+, Z1-)		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave negative inputs disconnected	TTL / CMOS / Open-collector			
Input voltage, single-ended mode A/A+, B/B+	Logic "LOW"			1.6	V
	Logic "HIGH"	1.8			
Input voltage, single-ended mode Z/Z+	Floating voltage (not connected)		3.3		V
	Logic "LOW"			1.2	
Input current, single-ended mode A/A+, B/B+, Z/Z+	Logic "HIGH"	1.4			mA
	Floating voltage (not connected)		4.7		
Differential mode compliance	Logic "LOW"; Pull to GND		5.5	6	mV
	Logic "HIGH"; Internal 2.2KΩ pull-up to +5	0	0	0	
Input voltage, differential mode	For full RS422 compliance, see <sup>2</sup>	TIA/EIA-422-A			
	Hysteresis	±0.06	±0.1	±0.2	V
	Common-mode range (A+ to GND, etc.)	-7		+7	
Input impedance, differential	A1+ to A1-, B1+ to B1-, Z1+ to Z1-		1		
Input frequency	Single-ended mode, Open-collector / NPN	0		5	MHz
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	0		10	
Minimum pulse width	Single-ended mode, Open-collector / NPN	1			μs
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	50			
Input voltage, any pin to GND	Absolute maximum values, continuous	-7		+7	V
	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>	-11		+14	
ESD protection	Human body model	±1			kV

<sup>1</sup> The digital inputs are software selectable as PNP or NPN

<sup>2</sup> For full RS-422 compliance, 150Ω termination resistors must be connected across the differential pairs, set SW3 pins 3,4 and 5 to ON.

Name EP	First edition January 19, 2018	Document template: P099.TQT.564.0001	Last edition May 25, 2022	Visa : AN
		Title of document <b>iPOS4808 BX-CAT-STO PRODUCT DATA SHEET</b>	N° document <b>P027.314.E221.DSH.10B</b>	
			Page: 4 of 5	

# iPOS4808 BX-CAT-STO DATASHEET

## P/N: P027.314.E221


Sin-Cos Encoder Inputs (Sin+, Sin-, Cos+, Cos-)		Min.	Typ.	Max.	Units
Input voltage, differential	Sin+ to Sin-, Cos+ to Cos-		1	1.25	V <sub>PP</sub>
Input voltage, any pin to GND	Operational range	-1	2.5	4	V
	Absolute maximum values, continuous	-7		+7	
	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>	-11		+14	
Input impedance	Differential, Sin+ to Sin-, Cos+ to Cos- <sup>1</sup>	4.2	4.7		kΩ
	Common-mode, to GND		2.2		kΩ
Resolution with interpolation	Software selectable, for one sine/cosine period	2		10	bits
Frequency	Sin-Cos interpolation	0		450	kHz
	Quadrature, no interpolation	0		10	MHz
ESD protection	Human body model	±1			kV
<b>Analog 0...5V Inputs (REF, FDBK)</b>					
Input voltage	Operational range	0		5	V
	Absolute maximum values, continuous	-12		+18	
	Absolute maximum, surge (duration ≤ 1s) <sup>†</sup>			±36	
Input impedance	To GND		28		kΩ
Resolution			12		bits
Integral linearity			±2	±10	bits
Offset error			±2	±10	bits
Gain error			±1%	±3%	% FS <sup>2</sup>
Bandwidth (-3Db)	Software selectable	0		1	kHz
ESD protection	Human body model	±5			kV
<b>RS-232</b>					
Compliance				TIA/EIA-232-C	
Bit rate	Software selectable	9600		115200	Baud
Short-circuit	232TX short to GND			Guaranteed	
ESD protection	Human body model	±2			kV

Safe Torque OFF (STO1+; STO1-; STO2+; STO2-)		Min.	Typ.	Max.	Units
Safety function	According to EN61800-5-2				STO (Safe Torque OFF)
EN 61800-5-1/-2 and EN 61508-5-3/-4 Classification	Safety Integrity Level				safety integrity level 3 (SIL3)
	PFFd (Probability of Failures per Hour - dangerous)	8*10 <sup>-10</sup>			hour <sup>-1</sup> (0.8 FIT)
EN13849-1 Classification	Performance Level				Cat3/PLe
	MTTFd (mean time to dangerous failure)	377			years
Mode compliance					PNP
Default state	Input floating (wiring disconnected)				Logic LOW
Input voltage	Logic "LOW" (PWM operation disabled)	-20		5.6	V
	Logic "HIGH" (PWM operation enabled)	18		36	
	Absolute maximum, continuous	-20		+40	
Input current	Logic "LOW"; pulled to GND		0		mA
	Logic "HIGH"; pulled to +Vlog		5	13	
Pulse duration	Ignored high-low-high			5	ms
	Accepted pulse			20	Hz
PWM operation delay	From Enabled low-high transition to PWM operation enabled			30	ms
ESD protection	Human body model	±2			kV
<b>Supply Output (+5V)</b>					
Output voltage	Current sourced = 250mA	4.8	5	5.2	V
Output current		200	250		mA
Short-circuit					Yes
Over-voltage					NOT protected
ESD protection	Human body model	±1			kV

<sup>†</sup> Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>1</sup> For many applications, a 150Ω termination resistor should be connected across SIN+ to SIN-, and across COS+ to COS- (set SW3 switches 3 and 4 to ON). Please consult the feedback device datasheet for confirmation.

<sup>2</sup> "FS" stands for "Full Scale"

Name EP	First edition January 19, 2018	Document template: P099.TQT.564.0001	Last edition May 25, 2022	Visa : AN
 <b>TECHNOSOFT</b>		Title of document <b>iPOS4808 BX-CAT-STO PRODUCT DATA SHEET</b>	N° document <b>P027.314.E221.DSH.10B</b>  Page: 5 of 5	