




iPOS3602 MX-CAN DATASHEET

P/N: P028.001.E101

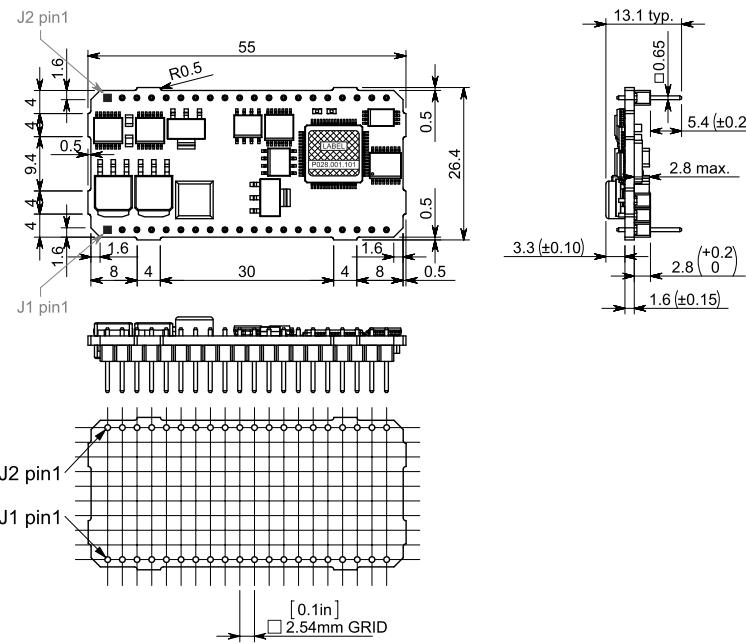

Features

- Motor supply: 9-36V. Optional logic supply: 7-36V
- Output current: 2A cont. (BLDC mode); 3.2A_{PEAK}, up to 100KHz PWM
- Digital Hall sensor interface (single-ended and open collector)
- Incremental encoder interface (single-ended, open collector and differential)
- Linear Hall sensors interface
- Analogue sin/cos encoder interface (differential 1V_{pp})
- 5 digital inputs, 5-36V, NPN: Enable, 2 for limit switches, 2 general-purpose
- 3 digital outputs, 5-36V, 0.5A, NPN O.C.: Ready, Error, 1 general-purpose
- 1 analogue input: 12-bit, 0-5V: Reference or general purpose
- RS-232 serial & CAN-bus 2.0B interfaces with h/w selectable addresses
- TMLCAN and CANopen (CiA 301v4.2 and 402v3.0) protocols
- 2K × 16 SRAM for data acquisition
- 4K × 16 E²ROM to store TML motion programs and data
- Operating ambient temperature: 0-40°C (over 40°C with derating)
- Hardware Protections: short-circuit between motor phases and from motor phases to GND, over-voltage, under-voltage and I²t
- Firmware: F509M+ or F524E+

Connector description

Pin	Name	Type	Description
1-2	B / A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
3-4	CR / B-	O	Chopping resistor / Phase B- for step motors
5-6	+V _{MOT}	I	Positive terminal of the motor supply: 9 to 36V _{dc}
7	+V _{LOG}	I	Positive terminal of the logic supply: 7 to 36V _{dc}
8	OUT3 / Ready	O	5-36V 0.5A drive ready output, active low, NPN open-collector/TTL pull-up. Also drives the green LED.
9	OUT2 / Error	O	5-36V 0.5A drive error output, active low, NPN open-collector/TTL pull-up. Also drives the red LED
10	Hall 1	I	Digital input Hall 1 sensor
11	Hall 2	I	Digital input Hall 2 sensor
12	Hall 3	I	Digital input Hall 3 sensor
13	OUT0	O	5-36V 0.5A general-purpose digital output, NPN open-collector / TTL pull-up

Motor - sensor configurations					
Sensor \ Motor	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder	Y		Y	Y	
Incr. Encoder + Hall	Y	Y			
Analog Sin/Cos encoder	Y				
Linear Halls	Y				
Digital Halls	Y				
Tacho			Y		
Open-loop (no sensor)				Y	Y

Connectors type			
Ref.	Producer	On-board connector	Mating connector
J1, J2	Fischer Elektronik	SL 11 112 020 G	BL 5 20
	-	Standard header square pin 0.635 x 0.635 mm; 2.54 mm pitch	Standard socket for square pin 0.635 x 0.635 mm; 2.54 mm pitch

14	REF	I	Analogue input, 12-bit, 0-5V. Used to read an analog position, speed or torque reference, or used as general purpose analogue input
15	Z / Z+	I	Incr. encoder Z (index) single-ended, or Z+ diff. input
16	Z- / LH3	I	Incr. encoder Z- differential input, or linear Hall 3 input
17	A / A+ / Sin+	I	Incr. encoder A single-ended, or A+ diff. input, or analogue encoder Sin+ diff. input
18	A- / Sin- / LH1	I	Incr. encoder A- diff. input, or analogue encoder Sin- diff. input, or linear Hall 1 input
19	B / B+ / Cos+	I	Incr. encoder B single-ended, or B+ diff. input, or analogue encoder Cos+ diff. input
20	B- / Cos- / LH2	I	Incr. encoder B- diff. input, or analogue encoder Cos- diff. input, or linear Hall 2 input

Pin	Name	Type	Description
1-2	A / A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
3-4	C / B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
5-6	GND	-	Negative return (ground) of the motor supply
7	IN0	I	5-36V digital input General-purpose
8	IN1	I	5-36V digital input
9	IN2 / LSP	I	5-36V digital input Positive limit switch input
10	IN3 / LSN	I	5-36V digital input Negative limit switch input
11	IN4 / Enable	I	5-36V digital input Drive enable input
12	GND	-	Return ground
13	+5V _{OUT}	O	5V output supply
14	AxisID 2	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
15	AxisID 1	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
16	AxisID 0	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
17	Can-Lo	I/O	CAN-Bus negative line (dominant low)
18	Can-Hi	I/O	CAN-Bus positive line (dominant high)
19	232TX	O	RS-232 Data Transmission
20	232RX	I	RS-232 Data Reception

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa : R. G.
TECHNOSOFT	Title of document iPOS3602 MX-CAN PRODUCT DATA SHEET	N° document P028.001.E101.DSH.10L		Page: 1 of 4



iPOS3602 MX-CAN DATASHEET

P/N: P028.001.E101



Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- Tamb = 0...40°C, VLOG = 24 VDC; VMOT = 36VDC
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude / continuous BLDC, DC, stepper) = 2A

Operating Conditions		Min.	Typ.	Max.	Units
Ambient temperature ¹		0		+40	°C
Ambient humidity	Non-condensing	0		90	%Rh
Altitude / pressure ²	Altitude (vs. sea level)	-0.1	0 ± 2.5	²	Km
	Ambient Pressure	0 ²	0.75 ± 1	10.0	atm
Storage Conditions		Min.	Typ.	Max.	Units
Ambient temperature		-40		+85	°C
Ambient humidity	Non-condensing	0		100	%Rh
Ambient Pressure		0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part			±0.5	kV
	Original packaging			±15	kV
Mechanical Mounting		Min.	Typ.	Max.	Units
Airflow		natural convection ³ , closed box			
Spacing required for vertical mounting	Between adjacent drives	30			mm
	Between drives and nearby walls	30			mm
	Between drives and roof-top	20			mm
Spacing required for horizontal mounting	Between adjacent drives	4			mm
	Between drives and nearby walls	5			mm
	Space needed for drive removal	10			mm
	Between drives and roof-top	15			mm
Insertion force	Using recommended mating connectors; without retainer		20	36	N
Extraction force		5	10		N
Environmental Characteristics		Min.	Typ.	Max.	Units
Size (Length x Width x Height)	Global size	55 x 26.4 x 13.1		mm	
		~2.2 x 1 x 0.5		inch	
Weight		8		g	
Power dissipation	Idle (no load)	1			W
	Operating	3			
Efficiency		98			%
Cleaning agents	Dry cleaning is recommended	Only Water- or Alcohol- based			
Protection degree	According to IEC60529, UL508	IP00		-	
Logic Supply Input (+V _{LOG})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	7		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	4.9		40	V _{DC}
	Absolute maximum values, continuous	-0.7		42	V _{DC}
	Absolute maximum values, surge (duration ≤ 10ms) [†]	-1		+45	V
Supply current	+V _{LOG} = 7V	125	300		
	+V _{LOG} = 12V	80	200		
	+V _{LOG} = 24V	50	125		
	+V _{LOG} = 40V	40	100		
Motor Supply Input (+V _{MOT})		Min.	Typ.	Max.	Units
Supply voltage	Nominal values	9		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	8.5		40	V _{DC}
	Absolute maximum values, continuous	-0.7		42	V _{DC}
	Absolute maximum values, surge (duration ≤ 10ms) [†]	-1		+45	V
Supply current	Idle	1	5		mA
	Operating	-3.2	±2	+3.2	A
Absolute maximum value, short-circuit condition (duration ≤ 10ms) [†]				5	A

Motor Outputs (A/A+, B/A-, C/B+, BR/B-)		Min.	Typ.	Max.	Units
Nominal output current, continuous	for DC brushed, steppers and BLDC motors with Hall-based trapezoidal control			2	
	for PMSM motors with FOC sinusoidal control (sinusoidal amplitude value)			2	
	for PMSM motors with FOC sinusoidal control (sinusoidal effective value)			1.41	
Motor output current, peak	maximum 24s	-3.2		+3.2	A
Short-circuit protection threshold	measurement range		±4.3	±5	A
Short-circuit protection delay		5	10		μs
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		±0.3	±0.5	V
Off-state leakage current			±0.5	±1	mA
Motor inductance (phase-to-phase)	Recommended value, for current ripple max. ±5% of full range; +V _{MOT} = 36 V	F _{PWM} 20 kHz 40 kHz 60 kHz 80 kHz 100 kHz	250 120 100 60 45		μH
	Minimum value, limited by short-circuit protection; +V _{MOT} = 36 V	20 kHz 40 kHz 60 kHz 80 kHz 100 kHz	75 25 20 10 5		μH
	Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	20 kHz 40 kHz 60 kHz 80 kHz 100 kHz	250 125 100 63 50	μs
	Current measurement	FS = Full Scale accuracy		±4	±8
Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4/Enable)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / LVTTL (3.3V) / Open-collector / NPN / 24V outputs			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		0	0.8	
	Logic "HIGH"	2	5+24		
	Floating voltage (not connected)		3		
	Absolute maximum, continuous	-10		+30	V
Input current	Absolute maximum, surge (duration ≤ 1S) [†]	-20		+40	
	Logic "LOW"; pulled to GND		0.6	1	
	Logic "HIGH"; Internal 4.7kΩ pull-up to +3.3V	0	0	0	mA
	Logic "HIGH"; Pulled to +5V		0.15	0.2	
Input frequency	Logic "HIGH"; Pulled to +24V		2	2.5	
		0		150	kHz
Minimum pulse		3.3			μs
ESD protection	Human body model	±5			kV
Digital Outputs (OUT0, OUT2/Error, OUT3/ Ready)		Min.	Typ.	Max.	Units
Mode compliance	All outputs (OUT0, OUT2/Error, OUT3/Ready)	TTL / CMOS / Open-collector / NPN 24V			
	Ready, Error	Same as above + LVTTL (3.3V)			
Default state	Not supplied (+V _{LOG} floating or to GND)	High-Z (floating)			
	Immediately after power-up	OUT0 OUT2/Error, OUT3/Ready	Logic "HIGH"		
	Normal operation	OUT0, OUT2/Error OUT3/Ready	Logic "LOW"		
			Logic "HIGH"		

¹ Operating temperature can be extended up to +65°C with reduced current and power ratings.

² iPOS360x can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ In case of forced cooling (conduction or ventilation) the spacing requirements may drop substantially down to zero as long as the ambient temperature is kept below the maximum operating limit

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa : R. G.
 TECHNOSOFT	Title of document iPOS3602 MX-CAN PRODUCT DATA SHEET			N° document P028.001.E101.DSH.10L



Output voltage	Logic "LOW"; output current = 0.5A		0.2	0.8	V
	Logic "HIGH"; output current = 0, no load	OUT2/Error, OUT3/Ready OUT0	2.9 4	3 4.5	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		
	Absolute maximum, continuous	-0.5		V _{LOG} +0.5	
Output current	Absolute maximum, surge (duration ≤ 1S) [†]	-1		V _{LOG} +1	A
	Logic "LOW", sink current, continuous			0.5	
	Logic "LOW", sink current, pulse ≤ 5 sec.			1	
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V	OUT2/Error OUT3/Ready OUT0		2	
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V		0.1	0.2	mA
Minimum pulse width		2			µs
ESD protection	Human body model	±5			kV
Digital Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector			
Default state	Input floating (wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		0	0.8	V
	Logic "HIGH"	2	5		
	Floating voltage (not connected)		4.4		
	Absolute maximum, surge (duration ≤ 1S) [†]	-10		+15	
Input current	Logic "LOW"; Pull to GND			1.2	mA
	Logic "HIGH"; Internal 4.7kΩ pull-up to +5	0	0	0	
Minimum pulse width		2			µs
ESD protection	Human body model	±5			kV
Encoder Inputs (A/A+, A-, B/B+, B-, Z/Z+, Z)		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave negative inputs disconnected	TTL / CMOS / Open-collector			
Input voltage, single-ended mode A/A+, B/B+	Logic "LOW"			1.6	V
	Logic "HIGH"	1.8			
	Floating voltage (not connected)		4.5		
Input voltage, single-ended mode Z/Z+	Logic "LOW"			1.2	V
	Logic "HIGH"	1.4			
	Floating voltage (not connected)		4.7		
Input current, single-ended mode A/A+, B/B+, Z/Z+	Logic "LOW"; Pull to GND		2.5	3	mA
	Logic "HIGH"; Internal 2.2kΩ pull-up to +5	0	0	0	
Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Input voltage, differential mode	Hysteresis	±0.06	±0.1	±0.2	V
	Common-mode range (A+ to GND, etc.)	-7		+7	
Input impedance, differential	A+ to A-, B+ to B-	4.2	4.7		kΩ
	Z+ to Z-	6.1	7.2		
Input frequency	Single-ended mode, Open-collector / NPN	0		500	kHz
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	0		10	MHz
Minimum pulse width	Single-ended mode, Open-collector / NPN	1			µs
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	50			ns

Input voltage, any pin to GND	Absolute maximum values, continuous	-7		+7	V	
	Absolute maximum, surge (duration ≤ 1S) [†]	-11		+14		
	ESD protection	Human body model	±1			
	Linear Hall Inputs (LH1, LH2, LH3)	Min.	Typ.	Max.	Units	
Input voltage	Operational range	0	0.5+4.5	4.9	V	
	Absolute maximum values, continuous	-7		+7		
	Absolute maximum, surge (duration ≤ 1S) [†]	-11		+14		
Input current	Input voltage 0...+5V	-1	±0.9	+1	mA	
Interpolation Resolution	Depending on software settings			11	bits	
Frequency		0		1	kHz	
ESD protection	Human body model	±1			kV	
	Sin-Cos Encoder Inputs (Sin+, Sin-, Cos+, Cos-)	Min.	Typ.	Max.	Units	
Input voltage, differential	Sin+ to Sin-, Cos+ to Cos-		1	1.25	V _{PP}	
	Operational range	-1	2.5	4	V	
	Absolute maximum values, continuous	-7		+7		
Input voltage, any pin to GND	Absolute maximum, surge (duration ≤ 1S) [†]	-11		+14		
	Differential, Sin+ to Sin-, Cos+ to Cos- ²	4.2	4.7		kΩ	
	Common-mode, to GND		2.2		kΩ	
Resolution with interpolation	Software selectable, for one sine/cosine period	2		10	bits	
Frequency	Sin-Cos interpolation	0		450	kHz	
	Quadrature, no interpolation	0		10	MHz	
	ESD protection	Human body model	±1		kV	
	Analog 0...5V Inputs (REF)	Min.	Typ.	Max.	Units	
Input voltage	Operational range	0		4.95	V	
	Absolute maximum values, continuous	-12		+18		
	Absolute maximum, surge (duration ≤ 1S) [†]			±36		
Input impedance	To GND		30		kΩ	
Resolution			12		bits	
Integral linearity				±2	bits	
Offset error		±2	±10		bits	
Gain error		±1%	±3%		% FS ³	
Bandwidth (-3dB)	Software selectable	0	1		kHz	
ESD protection	Human body model	±5			kV	
	Axis ID Inputs (AxisID 0, AxisID 1, AxisID 2)	Min.	Typ.	Max.	Units	
External connections	7 levels	Not connected; Strap to GND; Strap to +5V; 4.7kΩ to GND; 4.7kΩ to +5V; 22kΩ to GND; 22kΩ to +5V;				
Pin current	Use to size PCB tracks			±0.5	mA	
4.7kΩ/22kΩ resistor	Power rating	3			mW	
	Tolerance			±5	%	
ESD protection	Human body model	±5			kV	
	RS-232	Min.	Typ.	Max.	Units	
Compliance		TIA/EIA-232-C				
Bit rate	Software selectable	9600	115200		Baud	
Short-circuit	232TX short to GND	Guaranteed				
ESD protection	Human body model	±2			kV	
	CAN-Bus	Min.	Typ.	Max.	Units	
Compliance		ISO11898, CiA-301v4.2 & 402v3.0				
Bit rate	Software selectable	125		1000	Kbps	
Bus length	1Mbps			25	m	
	800Kbps			50		
	500Kbps			100		
	≤ 250Kbps			250		
Resistor	Between CAN-Hi, CAN-Lo	none on-board				
Node addressing	Strapping option (AxisID0,1,2)	1 ÷ 127 (CANopen); 1-195 & 255 (MLCAN)				
ESD protection	Human body model	±15			kV	

¹ For full RS-422 compliance, 120Ω termination resistors must be connected across the differential pairs, as close as possible to the drive input pins.

² For many applications, an 120Ω termination resistor should be connected across SIN+ to SIN-, and across COS+ to COS-. Please consult the feedback device datasheet for confirmation.


³ "FS" stands for "Full Scale".

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa : R. G.
 TECHNOSOFT	Title of document	iPOS3602 MX-CAN PRODUCT DATA SHEET		




Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 250mA	4.8	5	5.2	V
Output current		250	350		mA
Short-circuit		Yes / Drive resets at event			
Over-voltage		NOT protected			
ESD protection	Human body model	±1			kV
Conformity		Min.	Typ.	Max.	Units
EU Declaration		2014/30/EU (EMC), 2014/35/EU (LVD), 2011/65/EU (RoHS), 1907/2006/EC (REACH), 93/68/EEC (CE Marking Directive), EC 428/2009 (non dual-use item, output frequency limited to 590Hz)			


[†] Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

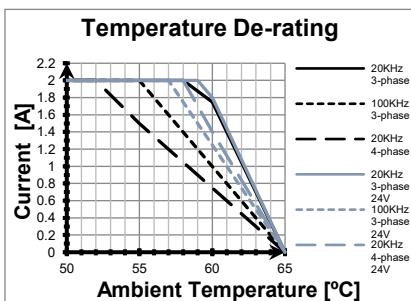


De-rating with ambient temperature

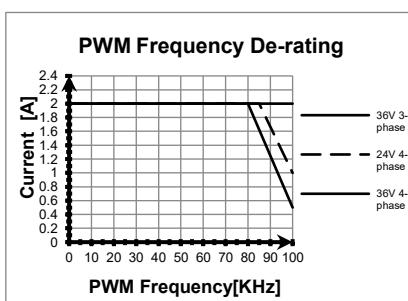


Current De-rating with PWM frequency

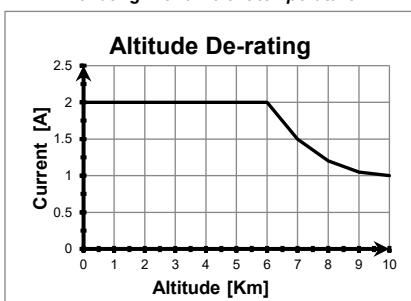

De-rating with altitude

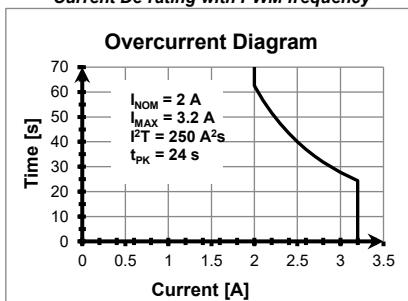

Over-current diagram

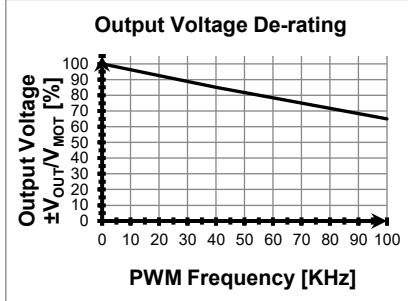

Output Voltage De-rating with PWM frequency[†]

[†] V_{OUT} – the output voltage, V_{MOT} – the motor supply voltage

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa : R. G.
TECHNOSOFT	Title of document iPOS3602 MX-CAN PRODUCT DATA SHEET	N° document P028.001.E101.DSH.10L		Page: 4 of 4