




iPOS3604 MX-CAN DATASHEET

P/N: P028.002.E101

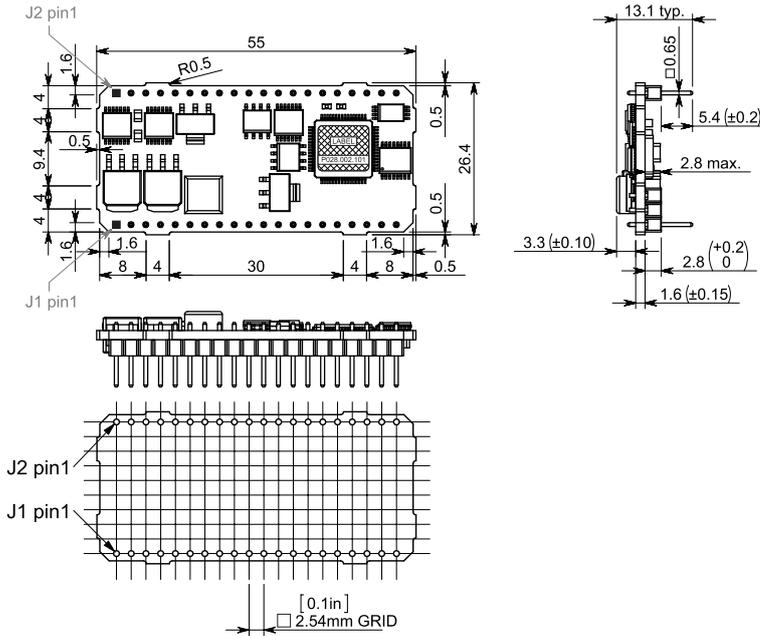

Motor – sensor configurations						
Sensor	Motor	PMSM	BLDC	DC BRUSH	STEP (2-ph)	STEP (3-ph)
Incr. Encoder		Ⓣ		Ⓣ	Ⓣ	
Incr. Encoder + Hall		Ⓣ	Ⓣ			
Analog Sin/Cos encoder		Ⓣ				
Linear Halls		Ⓣ				
Digital Halls		Ⓣ				
Tacho				Ⓣ		
Open-loop (no sensor)					Ⓣ	Ⓣ

Connectors type			
Ref.	Producer	On-board connector	Mating connector
J1, J2	Fischer Elektronik	SL 11 112 020 G	BL 5 20
-	-	Standard header square pin 0.635 x 0.635 mm; 2.54 mm pitch	Standard socket for square pin 0.635 x 0.635 mm; 2.54 mm pitch

Features

- Motor supply: 9-36V. Optional logic supply: 7-36V
- Output current: 4A cont. (BLDC mode); 10A_{PEAK}, up to 100kHz PWM
- Digital Hall sensor interface (single-ended and open collector)
- Incremental encoder interface (single-ended, open collector and differential)
- Linear Hall sensors interface
- Analogue sin/cos encoder interface (differential 1V_{pp})
- 5 digital inputs, 5-36V, NPN: Enable, 2 for limit switches, 2 general-purpose
- 3 digital outputs, 5-36V, 0.5A, NPN O.C.: Ready, Error, 1 general-purpose
- 1 analogue input: 12-bit, 0-5V: Reference or general purpose
- RS-232 serial & CAN-bus 2.0B interfaces with h/w selectable addresses
- TMLCAN and CANopen (CiA 301v4.2 and 402v3.0) protocols
- 2K x 16 SRAM for data acquisition
- 4K x 16 E²ROM to store TML motion programs and data
- Operating ambient temperature: 0-40°C (over 40°C with derating)
- Hardware Protections: short-circuit between motor phases and from motor phases to GND, over-voltage, under-voltage and I²t
- Firmware: F508M+ or F523E+

Connector description

Pin	Name	Type	Description
1-2	B / A-	O	Phase B for 3-ph motors, A- for 2-ph steppers, Motor- for DC brush motors
3-4	CR / B-	O	Chopping resistor / Phase B- for step motors
5-6	+V _{MOT}	I	Positive terminal of the motor supply: 9 to 36V _{DC}
7	+V _{LOG}	I	Positive terminal of the logic supply: 7 to 36V _{DC}
8	OUT3 / Ready	O	5-36V 0.5A drive ready output, active low, NPN open-collector/TTL pull-up. Also drives the green LED.
9	OUT2 / Error	O	5-36V 0.5A drive error output, active low, NPN open-collector/TTL pull-up. Also drives the red LED
10	Hall 1	I	Digital input Hall 1 sensor
11	Hall 2	I	Digital input Hall 2 sensor
12	Hall 3	I	Digital input Hall 3 sensor
13	OUT0	O	5-36V 0.5A general-purpose digital output, NPN open-collector / TTL pull-up

14	REF	I	Analogue input, 12-bit, 0-5V. Used to read an analog position, speed or torque reference, or used as general purpose analogue input
15	Z / Z+	I	Incr. encoder Z (index) single-ended, or Z+ diff. input
16	Z- / LH3	I	Incr. encoder Z- differential input, or linear Hall 3 input
17	A / A+ / Sin+	I	Incr. encoder A single-ended, or A+ diff. input, or analogue encoder Sin+ diff. input
18	A- / Sin- / LH1	I	Incr. encoder A- diff. input, or analogue encoder Sin- diff. input, or linear Hall 1 input
19	B / B+ / Cos+	I	Incr. encoder B single-ended, or B+ diff. input, or analogue encoder Cos+ diff. input
20	B- / Cos- / LH2	I	Incr. encoder B- diff. input, or analogue encoder Cos- diff. input, or linear Hall 2 input

Pin	Name	Type	Description
1-2	A / A+	O	Phase A for 3-ph motors, A+ for 2-ph steppers, Motor+ for DC brush motors
3-4	C / B+	O	Phase C for 3-ph motors, B+ for 2-ph steppers
5-6	GND	-	Negative return (ground) of the motor supply
7	IN0	I	5-36V digital input General-purpose
8	IN1	I	5-36V digital input
9	IN2 / LSP	I	5-36V digital input Positive limit switch input
10	IN3 / LSN	I	5-36V digital input Negative limit switch input
11	IN4 / Enable	I	5-36V digital input Drive enable input
12	GND	-	Return ground
13	+5V _{OUT}	O	5V output supply
14	AxisID 2	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
15	AxisID 1	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
16	AxisID 0	I	Axis ID/Address input. 7 states: floating, strap to GND or +5V, resistor 4K7 or 22K to GND or +5V
17	Can-Lo	I/O	CAN-Bus negative line (dominant low)
18	Can-Hi	I/O	CAN-Bus positive line (dominant high)
19	232TX	O	RS-232 Data Transmission
20	232RX	I	RS-232 Data Reception

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa: R. G.
		Title of document iPOS3604 MX-CAN PRODUCT DATA SHEET	N° document P028.002.E101.DSH.100	
			Page: 1 of 4	



iPOS3604 MX-CAN DATASHEET

P/N: P028.002.E101



Electrical characteristics

All parameters measured under the following conditions (unless otherwise specified):

- Tamb = 0...40°C, VLOG = 24 VDC; VMOT = 36VDC
- Supplies start-up / shutdown sequence: -any-
- Load current (sinusoidal amplitude / continuous BLDC, DC, stepper) = 4A

Operating Conditions	Min.	Typ.	Max.	Units
Ambient temperature ¹	0		+40	°C
Ambient humidity	Non-condensing	0	90	%Rh
Altitude / pressure ²	Altitude (vs. sea level)	-0.1	0 ± 2.5	² Km
	Ambient Pressure	0 ²	0.75 ± 1	10.0 atm

Storage Conditions	Min.	Typ.	Max.	Units
Ambient temperature	-40		+85	°C
Ambient humidity	Non-condensing	0	100	%Rh
Ambient Pressure	0		10.0	atm
ESD capability (Human body model)	Not powered; applies to any accessible part		±0.5	kV
	Original packaging		±15	kV

Mechanical Mounting	Min.	Typ.	Max.	Units	
Airflow	natural convection ³ , closed box				
Spacing required for vertical mounting	Between adjacent drives	30		mm	
	Between drives and nearby walls	30		mm	
	Between drives and roof-top	20		mm	
Spacing required for horizontal mounting	Between adjacent drives	4		mm	
	Between drives and nearby walls	5		mm	
	Space needed for drive removal	10		mm	
	Between drives and roof-top	15		mm	
Insertion force	Using recommended mating connectors; without retainer		20	36	N
Extraction force		5	10	N	

Environmental Characteristics	Min.	Typ.	Max.	Units	
Size (Length x Width x Height)	Global size			55 x 26.4 x 13.1	mm
				~2.2 x 1 x 0.5	inch
Weight	8			g	
Power dissipation	Idle (no load)	1		W	
	Operating	3			
Efficiency	98			%	
Cleaning agents	Dry cleaning is recommended Only Water- or Alcohol- based				
Protection degree	According to IEC60529, UL508		IP00	-	

Logic Supply Input (+V _{LOG})	Min.	Typ.	Max.	Units	
Supply voltage	Nominal values	7		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	4.9		40	V _{DC}
	Absolute maximum values, continuous	-0.7		42	V _{DC}
Supply current	Absolute maximum values, surge (duration ≤ 10ms) [†]	-1		+45	V
	+V _{LOG} = 7V		125	300	mA
	+V _{LOG} = 12V		80	200	
	+V _{LOG} = 24V		50	125	
	+V _{LOG} = 40V		40	100	

Motor Supply Input (+V _{MOT})	Min.	Typ.	Max.	Units	
Supply voltage	Nominal values	9		36	V _{DC}
	Absolute maximum values, drive operating but outside guaranteed parameters	8.5		40	V _{DC}
	Absolute maximum values, continuous	-0.7		42	V _{DC}
	Absolute maximum values, surge (duration ≤ 10ms) [†]	-1		+45	V
Supply current	Idle		1	5	mA
	Operating	-10	±4	+10	A
	Absolute maximum value, short-circuit condition (duration ≤ 10ms) [†]			15	A

Motor Outputs (A/A+, B/A-, C/B+, BR/B-)	Min.	Typ.	Max.	Units			
Nominal output current, continuous	for DC brushed, steppers and BLDC motors with Hall-based trapezoidal control			4	A		
	for PMSM motors with FOC sinusoidal control (sinusoidal amplitude value)			4			
	for PMSM motors with FOC sinusoidal control (sinusoidal effective value)			2.82			
Motor output current, peak	maximum 2.5s	-10		+10	A		
Short-circuit protection threshold					±13	±15	A
Short-circuit protection delay		5	10		µs		
On-state voltage drop	Nominal output current; including typical mating connector contact resistance		±0.3	±0.5	V		
Off-state leakage current			±0.5	±1	mA		
Motor inductance (phase-to-phase)	Recommended value, for current ripple max. ±5% of full range; +V _{MOT} = 36 V	F _{PWM}			µH		
		20 kHz	250				
		40 kHz	120				
		60 kHz	100				
		80 kHz	60				
	Minimum value, limited by short-circuit protection; +V _{MOT} = 36 V	20 kHz	75		µH		
		40 kHz	25				
		60 kHz	20				
		80 kHz	10				
		100 kHz	5				
Motor electrical time-constant (L/R)	Recommended value for ±5% current measurement error	20 kHz	250		µs		
		40 kHz	125				
		60 kHz	100				
		80 kHz	63				
		100 kHz	50				
Current measurement	FS = Full Scale accuracy			±4	±8	%FS	

Digital Inputs (IN0, IN1, IN2/LSP, IN3/LSN, IN4/Enable)	Min.	Typ.	Max.	Units	
Mode compliance	TTL / CMOS / LVTTTL (3.3V) / Open-collector / NPN / 24V outputs				
Default state	Input floating (wiring disconnected) Logic HIGH				
Input voltage	Logic "LOW"		0	0.8	V
	Logic "HIGH"	2	5+24		
	Floating voltage (not connected)		3		
	Absolute maximum, continuous	-10		+30	
	Absolute maximum, surge (duration ≤ 1S) [†]	-20		+40	
Input current	Logic "LOW"; pulled to GND		0.6	1	mA
	Logic "HIGH"; Internal 4.7KΩ pull-up to +3.3	0	0	0	
	Logic "HIGH"; Pulled to +5V		0.15	0.2	
	Logic "HIGH"; Pulled to +24V		2	2.5	
Input frequency	0			150	kHz
Minimum pulse	3.3				µs
ESD protection	Human body model			±5	kV

¹ Operating temperature can be extended up to +65°C with reduced current and power ratings.

² iPOS360x can be operated in vacuum (no altitude restriction), but at altitudes over 2,500m, current and power rating are reduced due to thermal dissipation efficiency.

³ In case of forced cooling (conduction or ventilation) the spacing requirements may drop substantially down to zero as long as the ambient temperature is kept below the maximum operating limit

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa: R. G.
		Title of document iPOS3604 MX-CAN PRODUCT DATA SHEET	N° document P028.002.E101.DSH.100	
			Page: 2 of 4	



iPOS3604 MX-CAN DATASHEET

P/N: P028.002.E101



Digital Outputs (OUT0, OUT2/Error, OUT3/ Ready)		Min.	Typ.	Max.	Units	
Mode compliance	All outputs (OUT0, OUT2/Error, OUT3/Ready) Ready, Error	TTL / CMOS / Open-collector / NPN 24V				
		Same as above + LVTTTL (3.3V)				
Default state	Not supplied (+V _{LOG} floating or to GND)	High-Z (floating)				
	Immediately after power-up	OUT0	Logic "HIGH"			
		OUT2/Error, OUT3/ Ready	Logic "LOW"			
Normal operation	OUT0, OUT2/Error	Logic "HIGH"				
	OUT3/Ready	Logic "LOW"				
Output voltage	Logic "LOW"; output current = 0.5A		0.2	0.8	V	
	Logic "HIGH"; output current = 0, no load	OUT2/Error, OUT3/ Ready	2.9	3		3.3
		OUT0	4	4.5	5	
	Logic "HIGH", external load to +V _{LOG}		V _{LOG}		V	
	Absolute maximum, continuous	-0.5		V _{LOG} +0.5		
Absolute maximum, surge (duration ≤ 1S) †	-1		V _{LOG} +1			
Output current	Logic "LOW", sink current, continuous			0.5	A	
	Logic "LOW", sink current, pulse ≤ 5 sec.			1	A	
	Logic "HIGH", source current; external load to GND; V _{OUT} ≥ 2.0V	OUT2/Error OUT3/ Ready			2	mA
		OUT0			4	mA
	Logic "HIGH", leakage current; external load to +V _{LOG} ; V _{OUT} = V _{LOG} max = 40V		0.1	0.2	mA	
Minimum pulse width		2		μs		
ESD protection	Human body model	±5			kV	

Digital Hall Inputs (Hall1, Hall2, Hall3)		Min.	Typ.	Max.	Units
Mode compliance		TTL / CMOS / Open-collector			
Default state	Input floating (Wiring disconnected)	Logic HIGH			
Input voltage	Logic "LOW"		0	0.8	V
	Logic "HIGH"	2	5		
	Floating voltage (Not connected)		4.4		
	Absolute maximum, surge (duration ≤ 1S) †	-10		+15	
Input current	Logic "LOW"; Pull to GND			1.2	mA
	Logic "HIGH"; Internal 4.7KΩ pull-up to +5	0	0	0	
Minimum pulse width		2		μs	
ESD protection	Human body model	±5			kV

Encoder Inputs (A/A+, A-, B/B+, B-, Z/Z+, Z)		Min.	Typ.	Max.	Units
Single-ended mode compliance	Leave negative inputs disconnected	TTL / CMOS / Open-collector			
Input voltage, single-ended mode A/A+, B/B+	Logic "LOW"			1.6	V
	Logic "HIGH"	1.8			
	Floating voltage (not connected)		4.5		
Input voltage, single-ended mode Z/Z+	Logic "LOW"			1.2	V
	Logic "HIGH"	1.4			
	Floating voltage (not connected)		4.7		
Input current, single-ended mode A/A+, B/B+, Z/Z+	Logic "LOW"; Pull to GND		2.5	3	mA
	Logic "HIGH"; Internal 2.2KΩ pull-up to +5	0	0	0	

Differential mode compliance	For full RS422 compliance, see ¹	TIA/EIA-422-A			
Input voltage, differential mode	Hysteresis	±0.06	±0.1	±0.2	V
	Common-mode range (A+ to GND, etc.)	-7		+7	
Input impedance, differential	A+ to A-, B+ to B-	4.2	4.7		kΩ
	Z+ to Z-	6.1	7.2		
Input frequency	Single-ended mode, Open-collector / NPN	0		500	kHz
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	0		10	
Minimum pulse width	Single-ended mode, Open-collector / NPN	1			μs
	Differential mode, or Single-ended driven by push-pull (TTL / CMOS)	50			
Input voltage, any pin to GND	Absolute maximum values, continuous	-7		+7	V
	Absolute maximum, surge (duration ≤ 1S) †	-11		+14	
ESD protection	Human body model	±1			kV

Linear Hall Inputs (LH1, LH2, LH3)		Min.	Typ.	Max.	Units
Input voltage	Operational range	0	0.5+4.5	4.9	V
	Absolute maximum values, continuous	-7		+7	V
	Absolute maximum, surge (duration ≤ 1S) †	-11		+14	
Input current	Input voltage 0...+5V	-1	±0.9	+1	mA
Interpolation Resolution	Depending on software settings			11	bits
Frequency		0		1	kHz
ESD protection	Human body model	±1			kV

Sin-Cos Encoder Inputs (Sin+, Sin-, Cos+, Cos-)		Min.	Typ.	Max.	Units
Input voltage, differential	Sin+ to Sin-, Cos+ to Cos-		1	1.25	V _{PP}
	Operational range	-1	2.5	4	
	Absolute maximum values, continuous	-7		+7	
Input voltage, any pin to GND	Absolute maximum, surge (duration ≤ 1S) †	-11		+14	V
Input impedance	Differential, Sin+ to Sin-, Cos+ to Cos- ²	4.2	4.7		kΩ
	Common-mode, to GND		2.2		
Resolution with interpolation	Software selectable, for one sine/cosine period	2		10	bits
Frequency	Sin-Cos interpolation	0		450	kHz
	Quadrature, no interpolation	0		10	
ESD protection	Human body model	±1			kV

Analog 0...5V Inputs (REF)		Min.	Typ.	Max.	Units	
Input voltage	Operational range	0		4.95	V	
	Absolute maximum values, continuous	-12		+18		
	Absolute maximum, surge (duration ≤ 1S) †			±36		
Input impedance	To GND		30		kΩ	
Resolution			12		bits	
Integral linearity				±2	bits	
Offset error				±2	bits	
Gain error				±1%	±3%	% FS ³
Bandwidth (-3dB)	Software selectable	0		1	kHz	
ESD protection	Human body model	±5			kV	

Axis ID Inputs (AxisID 0, AxisID 1, AxisID 2)		Min.	Typ.	Max.	Units
External connections	7 levels	Not connected; Strap to GND; Strap to +5V; 4.7KΩ to GND; 4.7KΩ to +5V; 22KΩ to GND; 22KΩ to +5V;			
Pin current	Use to size PCB tracks			±0.5	mA
4.7KΩ/22KΩ resistor	Power rating	3			mW
	Tolerance			±5	%
ESD protection	Human body model	±5			kV

¹ For full RS-422 compliance, 120Ω termination resistors must be connected across the differential pairs, as close as possible to the drive input pins.

² For many applications, a 120Ω termination resistor should be connected across SIN+ to SIN-, and across COS+ to COS-. Please consult the feedback device datasheet for confirmation.

³ "FS" stands for "Full Scale"

Name A. N.	First edition May 11, 2011	Document template: P099.TQT.564.0001	Last edition November 24, 2023	Visa: R. G.
		Title of document iPOS3604 MX-CAN PRODUCT DATA SHEET	N° document P028.002.E101.DSH.100	
				Page: 3 of 4




RS-232		Min.	Typ.	Max.	Units
Compliance		TIA/EIA-232-C			
Bit rate	Software selectable	9600		115200	Baud
Short-circuit	232TX short to GND	Guaranteed			
ESD protection	Human body model	±2			kV

CAN-Bus		Min.	Typ.	Max.	Units
Compliance		ISO11898, CiA-301v4.2 & 402v3.0			
Bit rate	Software selectable	125		1000	Kbps
Bus length	1Mbps			25	m
	800Kbps			50	
	500Kbps			100	
	≤ 250Kbps			250	
Resistor	Between CAN-Hi, CAN-Lo	none on-board			
Node addressing	Strapping option (AxisID0,1,2)	1 + 127 (CANopen); 1-195 & 255 (TMLCAN)			
ESD protection	Human body model	±15			kV


Supply Output (+5V)		Min.	Typ.	Max.	Units
Output voltage	Current sourced = 250mA	4.8	5	5.2	V
Output current		250	350		mA
Short-circuit		Yes / Drive resets at event			
Over-voltage		NOT protected			
ESD protection	Human body model	±1			kV

Conformity		Min.	Typ.	Max.	Units
EU Declaration	2014/30/EU (EMC), 2014/35/EU (LVD), 2011/65/EU (RoHS), 1907/2006/EC (REACH), 93/68/EEC (CE Marking Directive), EC 428/2009 (non dual-use item, output frequency limited to 590Hz)				


† Stresses beyond values listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

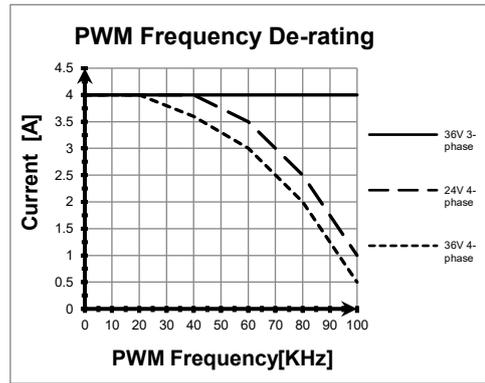


Current De-rating with PWM frequency

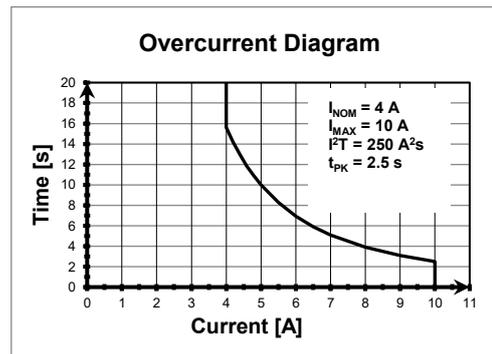


Over-current diagram

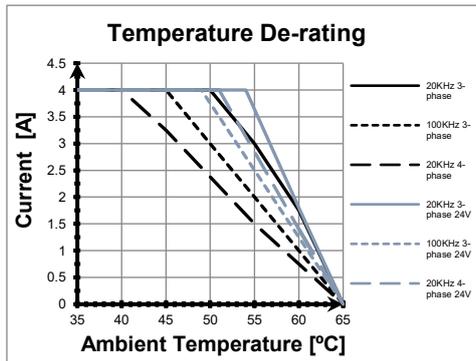

De-rating with ambient temperature

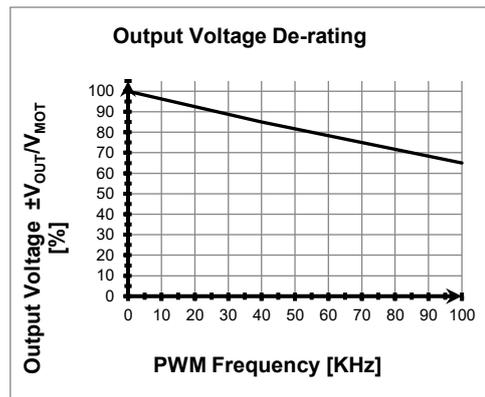

Output Voltage De-rating with PWM frequency¹

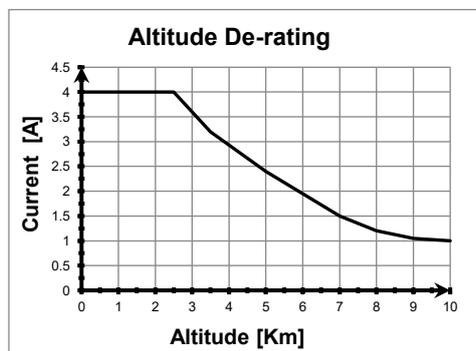

De-rating with altitude

¹ V_{OUT} – the output voltage, V_{MOT} – the motor supply voltage

Name	First edition	Document template: P099.TQT.564.0001	Last edition	Visa:
A. N.	May 11, 2011		November 24, 2023	R. G.
		Title of document	N° document	
		iPOS3604 MX-CAN	P028.002.E101.DSH.100	
		PRODUCT DATA SHEET		Page: 4 of 4